


# Steel City

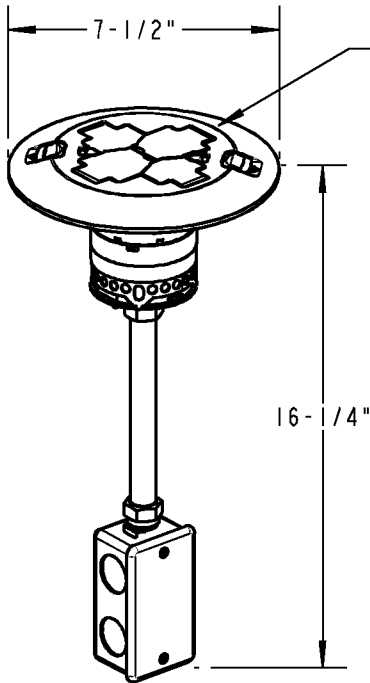


COVER SHIPPED  
WITH FPT3-2P-2C-XXX  
POKE THROUGH.

CATALOG NUMBERS:  
**FPT3-2P-2C-BRS**  
**FPT3-2P-2C-ALM**  
**FPT3-2P-2C-BLK**

COMPLETE FIRE RATED POKE THROUGH ASSEMBLY  
WITH:

- (1) PRE-WIRED 20A DUPLEX RECEPTACLE
  - (2) LEVITON CAT 5E DATA JACKS
  - (1) FACTORY INSTALLED TEMPORARY COVER
  - (1) ALL METAL COVER IN BRASS, ALUMINUM OR BLACK FINISH.
- SEE DRAWING WSD-000339 FOR COVER DETAILS.  
OTHER COLORS AVAILABLE WHEN COVER AND  
BASE UNIT ARE PURCHASED SEPARATELY.

SLIDE LATCHES  
RELEASE  
COVER LIDS




20A DUPLEX  
RECEPTACLE

LEVITON  
CAT 5E  
COMMUNICATION  
JACKS  
2-PLCS

## SPECIFICATIONS / FEATURES:

1. ALL METAL CONSTRUCTION WITH INTUMESCENT MATERIAL (FIRE RETARDANT).  
JUNCTION BOX WITH:
  - (4) 3/4" SIDE KNOCKOUTS
  - (2) 1/2" BACKSIDE KNOCKOUTS
  - (1) 1/2" BOTTOM KNOCKOUT
2. CORE-DRILLED HOLE SIZE: 3 TO 3-1/16" DIAMETER
3. UL LISTED AND CLASSIFIED. MEETS OR EXCEEDS UL AND CANADIAN SAFETY STANDARDS.
4. FIRE RATING AND CONCRETE THICKNESS MIN/MAX:  
FOR USE IN 1, 1-1/2 & 2-HOUR RATED FLOORS  
1-HOUR RATED FLOOR  
 2-1/4" THICK MINIMUM CONCRETE OVER STEEL DECKING  
 3" MINIMUM CONCRETE FOR REINFORCED SLAB  
 7-1/2" MAXIMUM CONCRETE THICKNESS  
 2-HOUR RATED FLOOR - CONCRETE THICKNESS MIN/MAX:  
 3-1/4" THICK MINIMUM CONCRETE OVER STEEL DECKING  
 4" MINIMUM CONCRETE FOR REINFORCED SLAB  
 7-1/2" MAXIMUM CONCRETE THICKNESS
5. FLOOR COVERINGS:  
FOR USE ON CARPET AND WOOD COVERED CONCRETE FLOORS,  
TILE FLOOR COVERINGS UP TO 3/4" MAXIMUM THICKNESS,  
AND LINOLEUM FLOOR COVERINGS UP TO A MAXIMUM OF  
1/8" THICKNESS.  
POKE THROUGH MAY BE INSTALLED DIRECTLY ON CONCRETE IF  
NO FINISHED FLOOR IS PLANNED.
6. MAXIMUM ALLOWABLE COPPER CROSS-SECTIONAL  
AREA FOR COMMUNICATIONS:  
SIDE THROUGH HOLE #1: .00321 SQ. INCHES  
CENTER HOLE: POWER  
SIDE THROUGH HOLE #2: .00321 SQ. INCHES

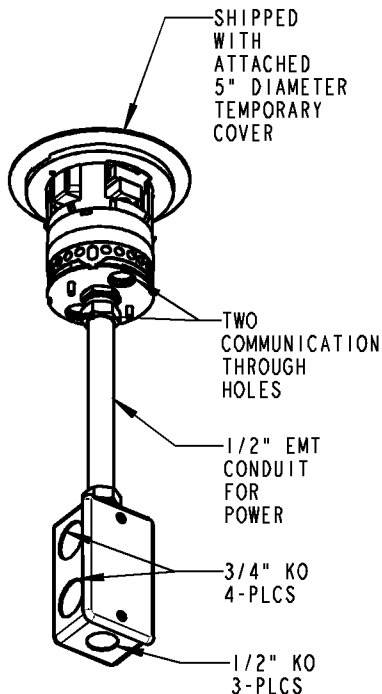

### GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [ ] ARE IN METRIC UNITS.

### REVISIONS

\*\* SEE ERN ( \*\*\*\* )  
FOR APPROVAL SIGNATURES  
& RELEASE DATE.  
PROJECT NO: \*\*\*\*

**Thomas & Betts**  
www.tnb.com

DESCRIPTION: **FPT3-2P-2C-XXX POKE THROUGH ASSEMBLY**  
XXX - DENOTES COVER MATERIAL OR FINISH

ORIGINAL PROJECT NO / ( ERN NO )

UD55647 / ( 2008050 )

SHEET NO:

1 OF 1

REV. NO:

-

DRAWING NO:

**WSD-000336**