


## Bushings, Nipples, Locknuts and Plugs

Available in your choice of steel/malleable iron, aluminum or stainless steel.

### Locknuts

- Steel from 1/4" to 2", malleable iron from 2 1/2" to 6"
- Aluminum 3003 from 1/2" to 6" or Type 304 stainless steel from 1/2" to 2"

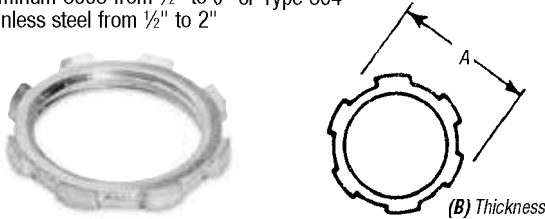

| CAT. NO.  |       |          | DIMENSIONS (IN.) |         |       |
|-----------|-------|----------|------------------|---------|-------|
| STL./M.I. | ALUM. | ST. STL. | SIZE (IN.)       | A       | B     |
| 139*      | —     | —        | 1/4              | 3/4     | 9/64  |
| 140*      | —     | —        | 3/8              | 1 1/16  | 9/64  |
| 141**     | 141AL | 141-SST  | 1/2              | 1 1/4   | 5/32  |
| 142**     | 142AL | 142-SST  | 3/4              | 1 3/8   | 3/16  |
| 143       | 143AL | 143-SST  | 1                | 1 11/16 | 13/64 |
| 144       | 144AL | 144-SST  | 1 1/4            | 2 1/8   | 13/64 |
| 145       | 145AL | 145-SST  | 1 1/2            | 2 1/2   | 13/64 |
| 146       | 146AL | 146-SST  | 2                | 3       | 7/32  |
| 147       | 147AL | —        | 2 1/2            | 3 3/16  | 13/32 |
| 148       | 148AL | —        | 3                | 4 1/16  | 13/32 |
| 149       | 149AL | —        | 3 1/2            | 4 13/16 | 15/32 |
| 150       | 150AL | —        | 4                | 5 1/16  | 15/32 |
| 151       | 151AL | —        | 4 1/2            | 5 15/16 | 17/32 |
| 152       | 152AL | —        | 5                | 6 1/2   | 17/32 |
| 153       | 153AL | —        | 6                | 7 3/4   | 19/32 |

\*Hex shape

\*\*Case hardened locknuts

Aluminum locknuts comply with federal standard of copper-free aluminum; less than .5% copper.

Available with DURA-PLATE® Finish.


UL File E-23018

CSA File No. 2884

Ensures positive bonding of conduit to box and prevents loosening due to vibration!

### Bonding Locknuts

- Steel or malleable iron (steel through 2")
- Can be used anywhere an ordinary locknut is installed
- Also can be used for Service Entrance applications in conformance with code
- T&B rigid conduit and EMT (thinwall) fittings comply with Federal Specification A-A-50553

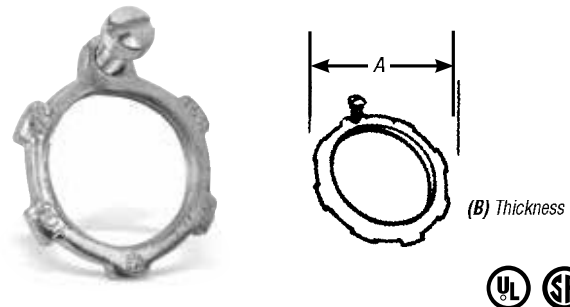

| CAT. NO. | SIZE (IN.) | DIMENSIONS (IN.) |      |
|----------|------------|------------------|------|
|          |            | A                | B    |
| 106†     | 1/2        | 1 1/8            | .125 |
| 107†     | 3/4        | 1 1/8            | .140 |
| 108      | 1          | 1 15/16          | .170 |
| 109      | 1 1/4      | 2 5/32           | .170 |
| 110      | 1 1/2      | 2 1/2            | .170 |
| 111      | 2          | 3                | .187 |
| 112†     | 2 1/2      | 3 13/32          | .375 |
| 113†     | 3          | 4 13/16          | .375 |
| 114†     | 3 1/2      | 4 29/32          | .438 |
| 115†     | 4          | 5 1/2            | .438 |

† Not CSA certified.

Available with DURA-PLATE® Finish.

UL File No. E-3060

CSA File No. 638

Provides positive seal against water and oil.

### Sealing Locknuts

- For use with rigid and intermediate metal conduits or fittings
- Provides watertight or raintight seal at all enclosures



Molded Santoprene Seal  
Color: Blue



| CAT. NO. | SIZE (IN.) | DIMENSIONS (IN.) |       |      |
|----------|------------|------------------|-------|------|
|          |            | A                | B     | C    |
| 141SL    | 1/2        | 1.140            | 1/8   | 1/4  |
| 142SL    | 3/4        | 1.420            | 5/32  | 5/32 |
| 143SL    | 1          | 1.770            | 11/64 | 5/32 |
| 144SL    | 1 1/4      | 2.281            | 11/64 | 3/16 |
| 145SL    | 1 1/2      | 2.598            | 11/64 | 5/32 |
| 146SL    | 2          | 3.175            | 3/16  | 1/4  |

UL File No. E-23018

CSA File No. 2884