
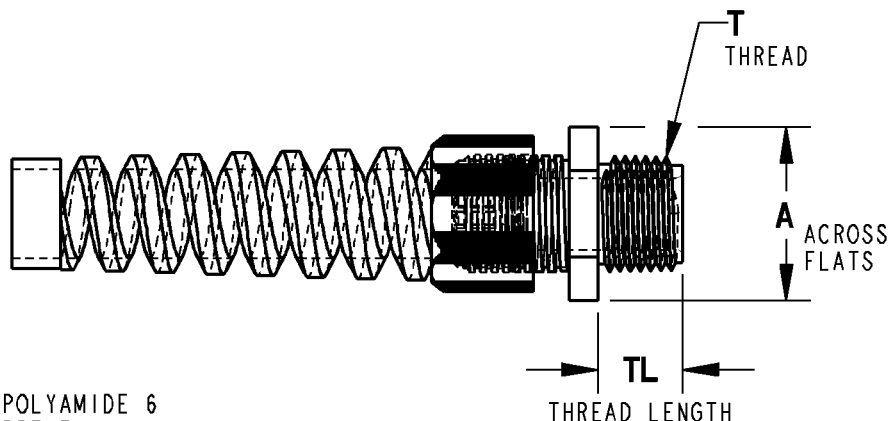


T&B Portable Cord Fittings

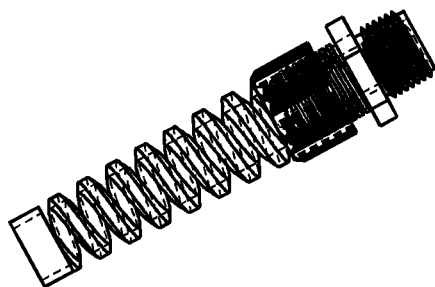

NOTES:

1. MATERIAL: BODY AND CAP- POLYAMIDE 6
SEALING RING: NEOPRENE
2. COLOR: GRAY (RAL 7001)
BLACK (RAL 9005)
3. PROTECTION CLASS: IP 68, 5 BAR
4. TEMPERATURE RANGE: -30°C TO 80°C PERMANENT
5. OPERATING TEMPERATURE: UP TO +150°C

B = BLACK
G = GRAY

CATALOG NUMBER	SIZE	CLAMPING RANGE		A ACROSS FLATS	T NPT THREADS	TL THREAD LENGTH
		MAXIMUM	MINIMUM			
SP-NPT38-G	3/8"	.394 [10,01]	.197 [5,0]	.866 [22,0]	3/8-18	.590 [14,99]
SP-NPT38-B	3/8"	.394 [10,01]	.197 [5,0]	.866 [22,0]	3/8-18	.590 [14,99]
SP-NPT12-G	1/2"	.551 [13,99]	.394 [10,1]	1.062 [27,0]	1/2-14	.590 [14,99]
SP-NPT12-B	1/2"	.551 [13,99]	.394 [10,1]	1.062 [27,0]	1/2-14	.590 [14,99]
SP-NPT34-G	3/4"	.709 [18,01]	.511 [12,98]	1.299 [32,99]	3/4-14	.590 [14,99]
SP-NPT34-B	3/4"	.709 [18,01]	.511 [12,98]	1.299 [32,99]	3/4-14	.590 [14,99]
SP-NPT1-G	1"	.984 [24,99]	.709 [18,01]	1.654 [42,01]	1-11 1/2	.709 [18,01]
SP-NPT1-B	1"	.984 [24,99]	.709 [18,01]	1.654 [42,01]	1-11 1/2	.709 [18,01]
SP-NPT1 1/4-G	1-1/4"	1.866 [47,4]	1.260 [32,0]	2.087 [53,01]	1 1/4-11 1/2	.709 [18,01]
SP-NPT1 1/4-B	1-1/4"	1.866 [47,4]	1.260 [32,0]	2.087 [53,01]	1 1/4-11 1/2	.709 [18,01]

GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

REVISIONS

1. SEE ERN 2003593 FOR APPROVAL SIGNATURES & RELEASE DATE.
PROJECT NO: RM401810

Thomas & Betts
www.tnb.com

DESCRIPTION:

**NON-METALLIC NPT THREAD
SPIRAL CABLE GLAND**

ORIGINAL PROJECT NO / (ERN NO)

RM401810 / (2002527)

SHEET NO:

1 OF 1

REV. NO:

1

DRAWING NO:

WSD-000010

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY. AND THE RIGHT IS RESERVED TO DEVIATE FROM ANY OF THE DETAILS SHOWN HEREON.

©2004 Thomas & Betts - Proprietary, All Rights Reserved