

T&B Conduit Fittings

Liquidtight Flexible Nonmetallic Conduit Fittings


ISO Metric Bullet™ Liquidtight Fittings

When you have a conduit application in a liquidtight environment, it's time to load up the T&B Bullet®. Thomas & Betts introduces the ISO Metric Bullet® liquidtight fittings for use with the 3/8", 1/2", and 3/4" NMT and NMC nonmetallic liquidtight conduit series.

The T&B Bullet® liquidtight fitting and NMT nonmetallic conduit are suited for OEM applications as in the machine tool industry where environments include continuous motion, vibration, and exposure to moisture, oil, dirt and dust.

The T&B Bullet® liquidtight fitting and NMT nonmetallic conduit are also suitable for construction applications where ISO metric threading and liquidtight systems are installed.

The Xtraflex® system offers a lightweight, liquidtight flexible conduit solution for industrial applications. The Xtraflex® system allows fast, easy installation and high performance in demanding industrial applications.

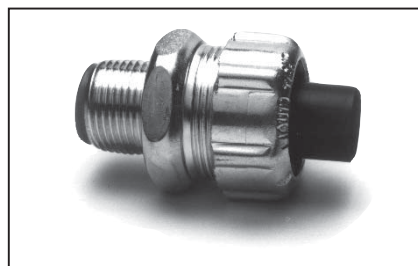

ISO Metric Bullet® Liquidtight Fitting



Cat. No.	Angle of Fitting	Conduit Size (in.)	Knockout Size (in.)	Unit Package	Standard Package	UPC Number
LT38M-ISO20	Straight	3/8	1/2	25	100	786210-62281
LT50M-ISO20	Straight	1/2	1/2	25	100	786210-62282
LT75M-ISO25	Straight	3/4	3/4	25	50	786210-62283
LT438M-ISO20	45°	3/8	1/2	25	50	786210-62284
LT450M-ISO20	45°	1/2	1/2	25	50	786210-62285
LT475M-ISO25	45°	3/4	3/4	10	50	786210-62286
LT938M-ISO20	90°	3/8	1/2	25	50	786210-62288
LT950M-ISO20	90°	1/2	1/2	25	50	786210-62289
LT975M-ISO25	90°	3/4	3/4	10	50	786210-62290

ISO Metric Bullet® Liquidtight Fitting Nonmetallic



Cat. No.	Angle of Fitting	Conduit Size	Knockout Size	Unit Package	Standard Package	UPC Number
LT38P-ISO20	Straight	3/8"	1/2"	25	100	786210-66444
LT50P-ISO20	Straight	1/2"	1/2"	25	100	786210-66613
LT75P-ISO25	Straight	3/4"	3/4"	25	50	786210-66443
LT938P-ISO20	90°	3/8"	1/2"	25	50	786210-66612
LT950P-ISO20	90°	1/2"	1/2"	25	50	786210-66640
LT975M-ISO25	90°	3/4"	3/4"	10	50	786210-66611