



Catamount®

**NOTES:**



1. MATERIAL: NYLON 6,6
2. FLAMMABILITY: UL94V-2
3. OPERATING TEMPERATURE RANGE: -40°F [-40°C] TO 185°F [85°C]
4. MINIMUM TENSILE RATING: 18 LBS [80 N]
5. MAXIMUM WIRE BUNDLE: .625 [18,88]
6. INSTALLATION TOOL/SETTING: ERG50/1-3

CATALOG NUMBER	TIE COLOR	STRIPE COLOR
L-4-18-1/0-*	BROWN	BLACK
L-4-18-1/10-*		WHITE
L-4-18-1/2-*		RED
L-4-18-1/4-*		YELLOW
L-4-18-1/7-*		PURPLE
L-4-18-3/0-*	ORANGE	BLACK
L-4-18-3/10-*		WHITE
L-4-18-3/2-*		RED
L-4-18-3/4-*		YELLOW
L-4-18-3/7-*		PURPLE
L-4-18-5/0-*	GREEN	BLACK
L-4-18-5/10-*		WHITE
L-4-18-5/2-*		RED
L-4-18-5/4-*		YELLOW
L-4-18-5/7-*		PURPLE
L-4-18-6/0-*	BLUE	BLACK
L-4-18-6/10-*		WHITE
L-4-18-6/2-*		RED
L-4-18-6/4-*		YELLOW
L-4-18-6/7-*		PURPLE
L-4-18-8/0-*	GRAY	BLACK
L-4-18-8/10-*		WHITE
L-4-18-8/2-*		RED
L-4-18-8/4-*		YELLOW
L-4-18-8/7-*		PURPLE

* = PACKAGING: L = STD PKG (50) M = BULK PKG (1,000)

GENERAL NOTES		Thomas & Betts A Member of the ABB Group			
1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.					
2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.		www.tnb.com			
REVISIONS		DESCRIPTION:			
		4" SERIES 18			
		MINIATURE STRIPED CABLE TIES			
1 SEE ERN (2016267) FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO: 054P000575		ORIGINAL PROJECT NO / (ERN NO) FM401182 / (2007477)	SHEET NO: 1 OF 2	REV. NO: 1	DRAWING NO: WSD-000318

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY, AND THE RIGHT IS RESERVED TO DEVIATE FROM ANY OF THE DETAILS SHOWN HEREON.
COPYRIGHT THOMAS & BETTS CORPORATION. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL.

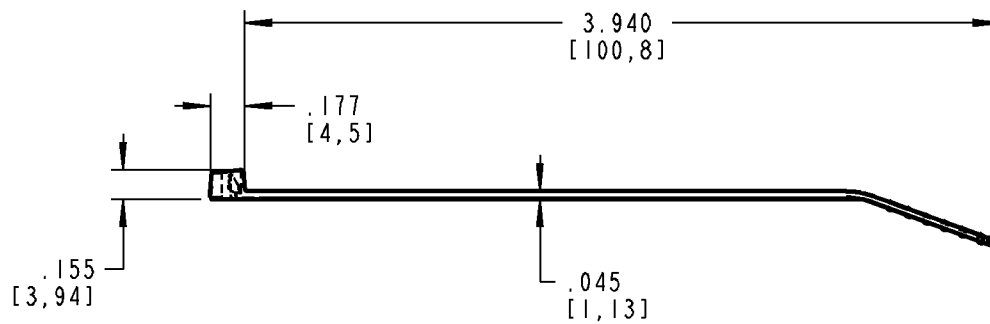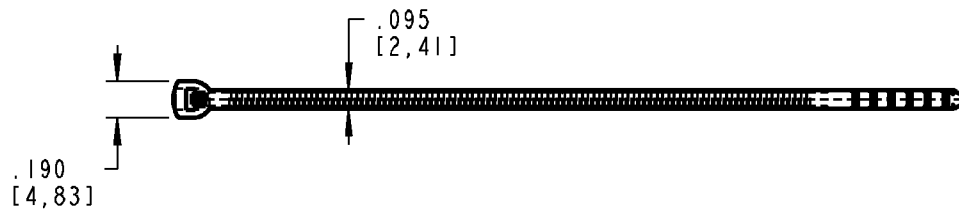

www.tnb.com			
Thomas & Betts A Member of the ABB Group			
DESCRIPTION: 4" SERIES 18 MINIATURE STRIPED CABLE TIES			
	SHEET NO: 2 OF 2	REV. NO: 1	DRAWING NO: WSD-000318

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY, AND THE RIGHT IS RESERVED TO DEVIATE FROM ANY OF THE DETAILS SHOWN HEREON.
COPYRIGHT THOMAS & BETTS CORPORATION. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL.