


T&B Hazardous Fittings

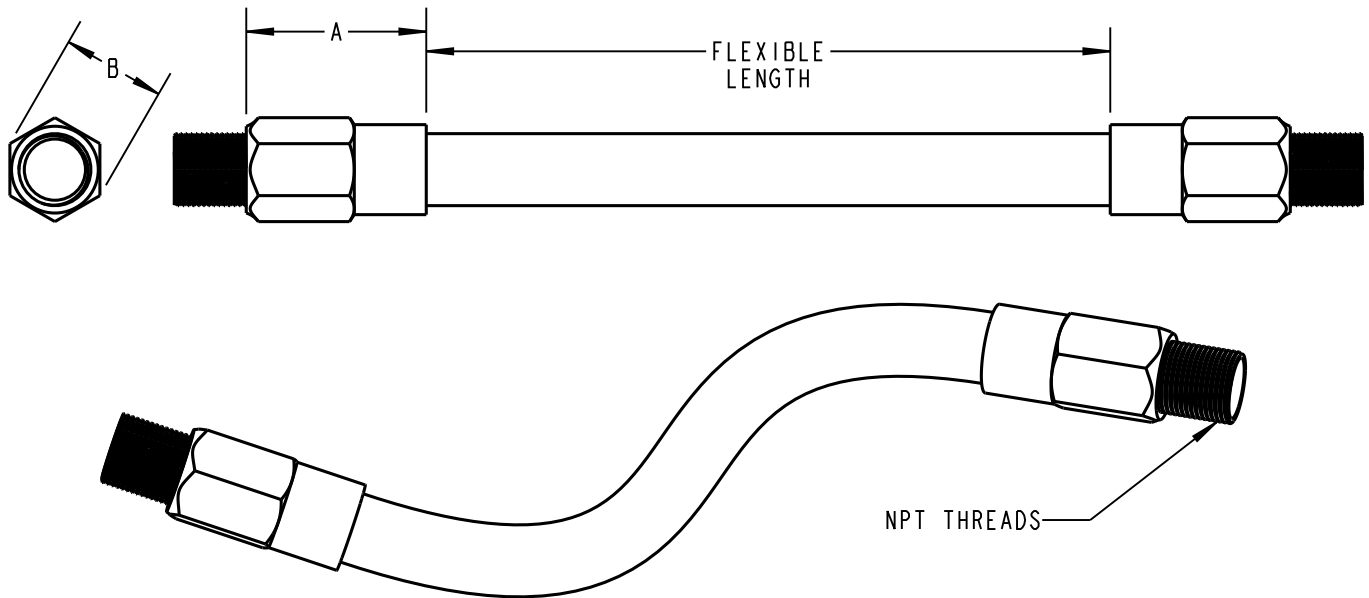

NOTES:

1. ALL FLEXIBLE COUPLINGS SHALL BE SUPPLIED IN BRONZE/BRASS CONSTRUCTION.
2. ALL FLEXIBLE COUPLINGS SHALL BE SUPPLIED WITH ARC RESISTANT INNER SLEEVE.
3. 1/2" AND 3/4" NPT SIZES LISTED CLASS I GROUPS A, B, C, D & CLASS II GROUPS E, F, G.
4. 1" NPT SIZE LISTED CLASS I GROUPS C, D & CLASS II GROUPS E, F, G.
5. ASSEMBLED COUPLINGS MADE WITH TWO FEMALE END FITTINGS AND MALE CLOSE NIPPLES
6. AMBIENT TEMPERATURE RANGE IS -22 DEGREES °F TO + 302 DEGREES °F.

XPLFL318	1" X 18" FLEXIBLE COUPLING	2.000" (50.8)	2.310" (58.7)
XPLFL236	3/4" X 36" FLEXIBLE COUPLING	1.600" (40.6)	1.870" (47.5)
XPLFL224	3/4" X 24" FLEXIBLE COUPLING	1.600" (40.6)	1.870" (47.5)
XPLFL218	3/4" X 18" FLEXIBLE COUPLING	1.600" (40.6)	1.870" (47.5)
XPLFL215	3/4" X 15" FLEXIBLE COUPLING	1.600" (40.6)	1.870" (47.5)
XPLFL212	3/4" X 12" FLEXIBLE COUPLING	1.600" (40.6)	1.870" (47.5)
XPLFL124	1/2" X 24" FLEXIBLE COUPLING	1.540" (39.1)	1.440" (36.6)
XPLFL118	1/2" X 18" FLEXIBLE COUPLING	1.540" (39.1)	1.440" (36.6)
XPLFL115	1/2" X 15" FLEXIBLE COUPLING	1.540" (39.1)	1.440" (36.6)
XPLFL112	1/2" X 12" FLEXIBLE COUPLING	1.540" (39.1)	1.440" (36.6)
XPLFL110	1/2" X 10" FLEXIBLE COUPLING	1.540" (39.1)	1.440" (36.6)
XPLFL18	1/2" X 8" FLEXIBLE COUPLING	1.540" (39.1)	1.440" (36.6)
XPLFL16	1/2" X 6" FLEXIBLE COUPLING	1.540" (39.1)	1.440" (36.6)
CAT #	DESCRIPTION	A DIM	B DIM

2"	20"	2.00"
1-1/2"	16"	1.52"
1-1/4"	14"	1.27"
1"	12"	.945"
3/4"	10"	.767"
1/2"	8"	.561"
Trade Size	Bend Radius	ID

GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

REVISIONS

- 3 SEE ERN (2018134) FOR APPROVAL SIGNATURES & RELEASE DATE.
PROJECT NO: RD55725

www.tnb.com

DESCRIPTION:

FLEXIBLE COUPLING FOR HAZARDOUS LOCATIONS

ORIGINAL PROJECT NO / (ERN NO)

RD55725 / (2008598)

SHEET NO:

1 OF 1

REV. NO:

3

DRAWING NO:

WSD-000382

Thomas & Betts
A Member of the ABB Group