



DuraGard® Waterproof Connections

Conduit Boxes (For Surface Mounting)

Type FD

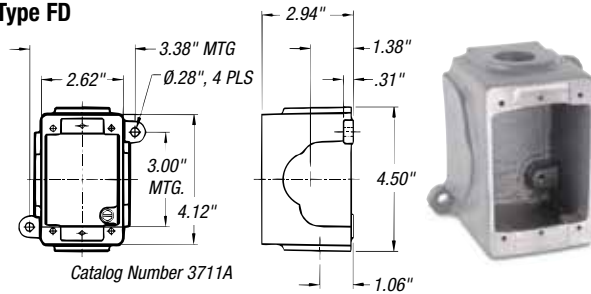


Catalog Number 3711A

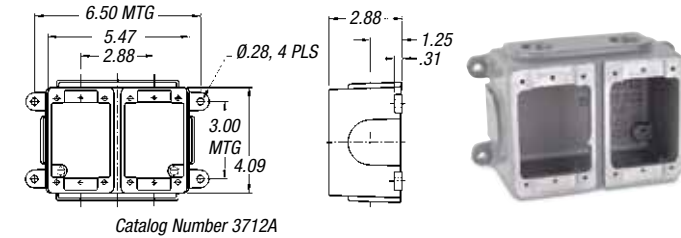

Catalog Number 3712A


	CAST ALUMINUM	CAST BRASS	USE WITH
Single	3711A	3731-RS	20A
Double	3712A	3732-RS	30A
DSFD	3781A	—	50A

Note: 3/4" NPT Hole Std. Additional accessories are available.
Please consult your Thomas & Betts representative.

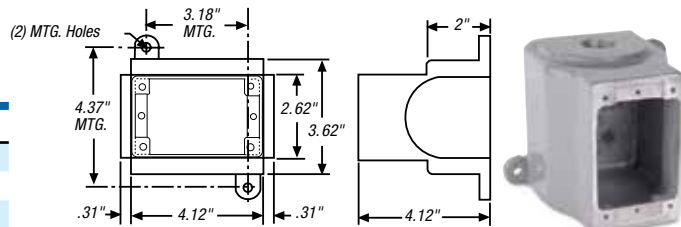

Catalog Number 3781A

45° Angle Adapter

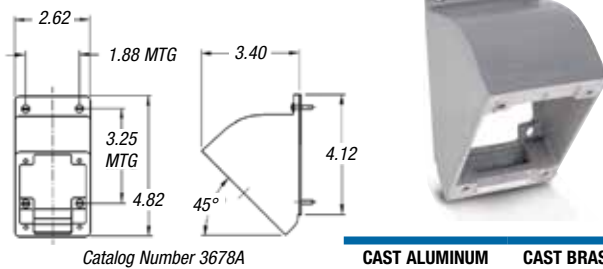

Catalog Number 3678A

CAST ALUMINUM	CAST BRASS
3678A	3678B

Conduit Adapter Kits (Plugs or Connectors)



SIZE	20 AMP	30 AMP	50 AMP	60 AMP
1/2"	9X2C50	9X3C50	—	—
3/4"	9X2C75	9X3C75	9X5C75	9X6C75
1"	—	9X3C10	9X5C10	9X6C10

Cable Bushings



20-Amp
Cable Bushing

MAX. CABLE O.D. (INCHES)	20 AMP	30, 50 & 60 AMP
.375	C16984A	—
.437	C16984B	—
.500	C16984C	—
.545	—	2000-11
.562	C16984D	—
.606	B16506	—
.620	—	2000-03
.625	B16524	—
.700	—	2000-04
.750	—	2000-01
.800	—	2000-06
.870	—	2000-02
.925	—	2000-12
1.000	—	2000-05

(Minimum limit 85% of O.D. size for sealing.)

Material — Oil-resistant Neoprene.

State catalog number followed by slash (/) and Max. Cable O.D.; example: 9P33U1/1000 will order the 1.000" bushing instead of the standard .700" bushing for the 9P33U1.

Replacement Caps



	20 AMP	30 AMP	50 AMP	60 AMP
Screw Cap (Connector)	9X2PSC	9X3PSC	9X5PSC	9X6PSC
Cup Cap (Plug)	—	9X3CC	9X3CC	9X3CC
Screw Cap (Receptacle)	—	7X3RCW	7X5RCW	7X6RCW
Flap Cap (Receptacle)	—	7X3RCF	7X5RCF	7X6RCF

DuraGard® Waterproof Connections

Replacement Interiors



		CAT. NO.	
AMPS	VOLTAGE POLARIZATION	MALE INTERIOR ASSEMBLY	FEMALE INTERIOR ASSEMBLY
2P3W 20A	125VAC	9XM23U1	9XF23U1
	250VAC	9XM23U2	9XF23U2
	277VAC	9XM23U3	9XF23U3
	480VAC	9XM23U4	9XF23U4
	600VAC	9XM23U5	9XF23U5
	through 600VAC/250VDC	9XM23U0	9XF23U0
2P3W 30A	125VAC	9XM33U1	9XF33U1
	250VAC	9XM33U2	9XF33U2
	277VAC	9XM33U3	9XF33U3
	480VAC	9XM33U4	9XF33U4
	600VAC	9XM33U5	9XF33U5
	through 600VAC/250VDC	9XM33U0	9XF33U0
2P3W 50A	125VAC	9XM53U1	9XF53U1
	250VAC	9XM53U2	9XF53U2
	480VAC	9XM53U4	9XF53U4
	600VAC	9XM53U5	9XF53U5
	through 600VAC/250VDC	9XM53U0	9XF53U0
3P4W 20A	125/250VAC	9XM24U1	9XF24U1
	3Ø 250VAC	9XM24U2	9XF24U2
	3Ø 480VAC	9XM24U4	9XF24U4
	3Ø 600VAC	9XM24U5	9XF24U5
	through 600VAC/250VDC	9XM24U0	9XF24U0
3P4W 30A	125/250VAC	9XM34U1	9XF34U1
	3Ø 250VAC	9XM34U2	9XF34U2
	3Ø 480VAC	9XM34U4	9XF34U4
	3Ø 600VAC	9XM34U5	9XF34U5
	through 600VAC/250VDC	9XM34U0	9XF34U0
3P4W 50A	125/250VAC	9XM54U1	9XF54U1
	3Ø 250VAC	9XM54U2	9XF54U2
	3Ø 480VAC	9XM54U4	9XF54U4
	3Ø 600VAC	9XM54U5	9XF54U5
	through 600VAC/250VDC	9XM54U0	9XF54U0
2P3W 60A	125VAC	9XM63U1	9XF63U1
	250VAC	9XM63U2	9XF63U2
3P4W 60A	125/250VAC	9XM64U1	9XF64U1
	3Ø 250VAC	9XM64U2	9XF64U2