


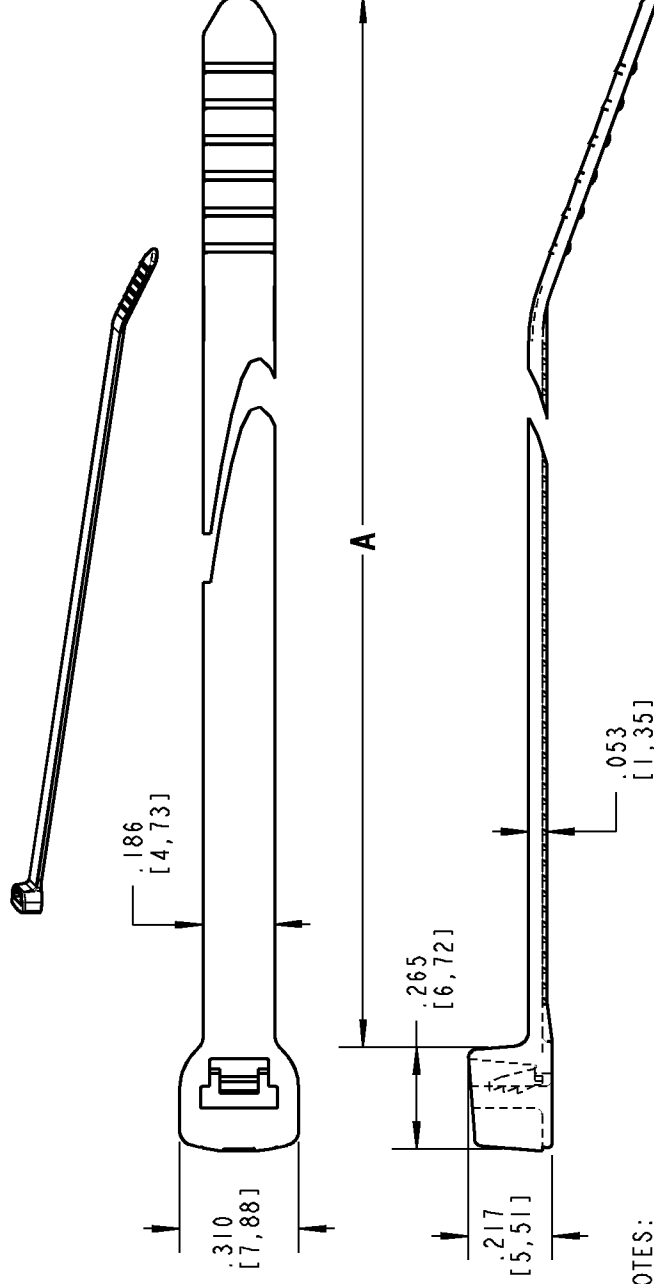

## NOTES:

1. MATERIAL: NYLON 6,6
2. FLAMMABILITY: UL94V-2
3. OPERATING TEMPERATURE RANGE: -40°F [-40°C] TO 185°F [85°C]
4. MINIMUM TENSILE RATING: 50 LBS [222 N]
5. MINIMUM WIRE BUNDLE: .0625 [1.59]
6. MAXIMUM WIRE BUNDLE: SEE TABLE
7. INSTALLATION TOOL/SETTING: WT199/6-8 (MS90387-1) OR ERG299/6-8

| CATALOG NUMBER | MAXIMUM WIRE BUNDLE | A               |
|----------------|---------------------|-----------------|
| L-5-50-***     | 1.0 [25.4]          | 5.235 [132.97]  |
| L-7-50-***     | 1.750 [44.45]       | 7.435 [188.85]  |
| L-7-50FL-***   | 1.750 [44.45]       | 7.435 [188.85]  |
| L-11-50-***    | 3.000 [76.2]        | 11.640 [295.66] |
| L-11-50FL-***  | 3.000 [76.2]        | 11.640 [295.66] |
| L-14-50-***    | 4.000 [101.6]       | 14.655 [372.24] |

\* = COLOR CODE - 0= BLACK (OUTDOOR) 4= YELLOW 8= GRAY 17= FLUORESCENT YELLOW  
1= BROWN 5= GREEN 9= NATURAL 18= FLUORESCENT GREEN  
2= RED 6= BLUE 11= FLUORESCENT PINK 20= FLUORESCENT BLUE  
3= ORANGE 7= PURPLE 16= FLUORESCENT ORANGE

\*\* = PACKAGING- C= STD PKG (100) D= BULK PKG (500) M= BULK PKG (1,000)

CONSULT CUSTOMER SERVICE FOR PACKAGE QUANTITY AVAILABILITY

FLUORESCENT COLORS NOT "UR" OR "CE" RECOGNIZED OR LISTED

## GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [ ] ARE IN METRIC UNITS.

## REVISIONS

- SEE ERN ( \*\*\*\* )  
FOR APPROVAL SIGNATURES  
& RELEASE DATE.  
PROJECT NO: \*\*\*\*

DESCRIPTION: 5", 7", 11" & 14" SERIES 50  
STANDARD CABLE TIES

ORIGINAL PROJECT NO / ( ERN NO ) SHEET NO: REV. NO: DRAWING NO:

FM401182 / ( 2006127 ) 1 OF 1 - WSD-000222

**Thomas & Betts**  
www.tnb.com