



SUPER SLOPE CEILING IC HOUSING

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

SUPER SLOPE
7/12 to 12/12 PITCH (30° to 45°)
INCANDESCENT LAMPS
IC928 SERIES

PRODUCT DESCRIPTION

Slope ceiling IC Housing "Air-Loc®" • Energy efficient, sealed inner housing • Double wall housing construction • Can be completely covered with insulation • When used with Air-Loc Gasket, stops infiltration and exfiltration of air, reducing heating and cooling costs.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected – see page 2.

Socket Medium base porcelain with nickel-plated copper screw shell
• Adjustable to position lamp perpendicular to floor.

Trims Trim selection shown on page 2.

Labels UL listed for through-branch wiring, damp locations and IP
• Product thermally protected against improper use of lamps
• Union made • UL Listed/CSA certified • Trim No. 603 is wet location approved for covered ceiling applications.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance. Specifications subject to change without notice.

INSTALLATION


Real Nail® 3 Bar Hangers Telescoping, Patented (US Patent D552,969) Real Nail 3 system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Integral T-bar notch and clip secures housing in suspended ceiling grid – no accessory clips required • 24" expansion stop allows quick placement of fixture in standard grid spacing • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications
• Bars captive to mounting frame • Edge-mounted for extra strength • Captive bugle-headed ring shank nail for quick one-step installation and easy removal with claw hammer for fixture relocation • Quick-Loc slot and oversized locking set screw lock fixture in position • Bar hanger foot contoured to align to bottom of construction joist • Alternate mounting holes included.

Junction Box Pre-wired junction box provided with (5) ½" and (1) ¾" knockouts, (4) Non-metallic sheathed cable connectors and ground wire, U.L. listed/CSA certified for through-branch wiring, maximum 8 No. 12 AWG 90° C branch circuit conductors (4 in, 4 out) • Junction box provided with removable access plates
• Knockouts equipped with pryout slots • **W option** is supplied with **push-in electrical connectors** for fast installation.

Mounting Frame 22-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation.

Housing IC housing, .032" aluminum sealed for Air-Loc Compliance • Access door for junction box accessibility • Housing is vertically adjustable to accommodate up to a 1" ceiling thickness.

DIMENSIONS

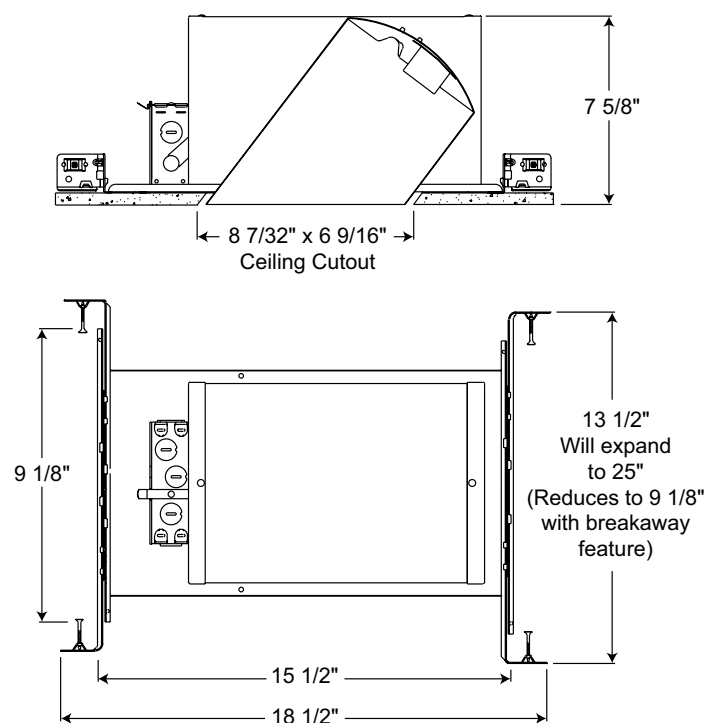

Accessories

Catalog Number	Description
ALG928	Air-Loc Gasket

To order, specify catalog number.

PRODUCT CODES

Catalog Number		Input Voltage	Lamp Rating
IC928	6" Incandescent Super Slope Ceiling New Construction IC Housing	120V	PAR16/PAR30/PAR38 (See page 2 for max. trim rating)
IC928 W	6" Incandescent Super Slope Ceiling New Construction IC Housing with push-in electrical connectors for fast, secure installation	120V	PAR16/PAR30/PAR38 (See page 2 for max. trim rating)





Housing and trim can be ordered together or separate, but will always ship separately.

SUPER SLOPE CEILING IC HOUSING

SUPER SLOPE
7/12 to 12/12 PITCH (30° to 45°)
INCANDESCENT LAMPS

IC928 SERIES

TRIMS/LAMPS

Catalog Number	Description	Max. Lamp Rating
 602 CWH	Clear Alzak® Cone, White Trim Ring	75W PAR30, 90W PAR38, 85W BR30
602 GWH	Gold Cone, White Trim Ring	
602 BWH	Black Cone, White Trim Ring	
602 HZWH	Haze Cone, White Trim Ring	
602 HZSC	Haze Cone, Satin Chrome Trim	
602 WWH	White Cone, White Trim Ring	
602 WHZWH	Wheat Haze Cone, White Trim Ring	50W PAR30
602 WHZABZ	Wheat Haze Cone, Classic Aged Bronze Trim Ring	
 603 BWH ◆	Lensed Flat Diffuser Trim, Black Baffle, White Trim Ring	90W PAR38
603 WWH ◆	Lensed Flat Diffuser Trim, White Baffle, White Trim Ring	
 604 BWH	Downlight Black Baffle, White Trim Ring	60W PAR16
604 BSC	Downlight Black Baffle, Satin Chrome Trim Ring	
604 BABZ	Downlight Black Baffle, Classic Aged Bronze Trim Ring	
604 BBL	Downlight Black Baffle, Black Trim Ring	
 604 WWH	Downlight White Baffle, White Trim Ring	60W PAR16
606 BWH	Cylinder Spotlight, Black Baffle, White Trim Ring	
606 WWH	Cylinder Spotlight, White Baffle, White Trim Ring	

Trim Size: Cat. No. 604 - 9³/₁₆" x 8³/₁₆" O.D.,
Cat. No. 606 - 9¹/₈" O.D.

Note: In Canada when insulation is present,
Type IC fixtures must be used.

◆ UL Listed for use in wet location.

Housing and trim can be ordered together or separate,
but will always ship separately.