



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

6" BASICS SERIES™ LED SURFACE MOUNT FIXTURE

FOR J-BOX OR RECESSED HOUSING
INSTALLATION



6RLS 07LM



PRODUCT DESCRIPTION

Sleek, ultra-low profile energy efficient LED surface mount fixture • Installs directly onto industry standard junction boxes and round mud rings • When used with accessory retrofit kit, can be installed into 5" or 6" IC or non-IC recessed housings • Replaces traditional 65W incandescent fixture performance, delivering 750 lumens • Dimmable with most standard incandescent dimmers and electronic low voltage dimmers • LED surface mount fixture is designed to provide over 50,000 hours of life • 5 year warranty.

PRODUCT SPECIFICATIONS

Construction

Decorative beveled aluminum trim frame with white finish • Diffusing dome lens conceals the LEDs from direct view and provides uniform lens luminance.

LED Light Engine LED board mounted directly to aluminum housing designed to provide superior thermal management and ensure long life • 2700K LED color temperature • LED's binned for 3-step MacAdam ellipse color consistency • 90 CRI minimum • Accommodates 120 volts AC at 60Hz • Dimmable with most standard incandescent, magnetic low voltage and electronic low voltage dimmers • For a list of compatible dimmers, see [JUNORETROBASICS-DIM](#).

Electrical Connections Fixture provided with leads for direct wire connection in j-box • Low profile fixture design is free from external electrical components, so j-box volume and box fill is not compromised • Accessory retrofit kit ships with a medium base socket adapter whip for installation as a retrofit trim into 5" or 6" incandescent housings with medium base sockets.

Life Rated for 50,000 hours at >70% lumen maintenance.

Labels ENERGY STAR® Certified • UL listed for US and Canada • Suitable for damp locations • Suitable for wet locations (indoor covered ceilings) when fixture is sealed to ceiling with field applied caulk (see instruction sheet for details).

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

INSTALLATION

Junction Box Mounting

Installs directly to industry standard junction boxes • Compatible boxes include 3-1/2" and 4" octagon junction boxes (1-1/2" minimum depth), round mud rings with 2-3/4" mounting centers, and 3" & 4" diameter non-metallic boxes • Quick-mount strap and spring securement system provides fast installation of fully assembled fixture to junction box • Suitable for ceiling or wall mount • Suitable for use within closet storage spaces when installed per NEC requirements.


Recessed Housing Mounting (must use 56RLSRETROKIT) The 6RLS fixture is compatible with most 5" or 6" recessed housings with an inside diameter between 5" and 7", and a minimum height of 4".

Compatible 5" and 6" Juno housings include:

Juno housings: IC20, IC25, IC2, IC21, IC22, IC23, TC20 and TC2 Series

VuLite housings: V5IC, V6IC, V5TC and V6TC Series

DIMENSIONS

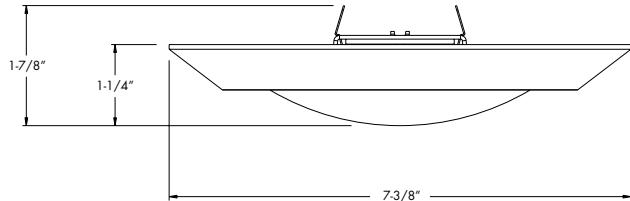

ACCESSORY

Catalog Number	Description
56RLSRETROKIT	Allows 6RLS to retrofit in 5" or 6" recessed housings. Kit contains: medium base adapter, mounting springs, and electrical connectors.

PERFORMANCE DATA

27K 90CRI	
Input Voltage	120V
Input Power Typical	10W
Frequency	60Hz
EMI/RFI	FCC Title 47, Part 15 Class B (consumer)
Minimum starting temp	-40°C (-40°F)
CRI	90 min.
CCT	2700K

ORDERING INFORMATION

Ordering Example: 6RLS 07LM 27K 90CRI 120 FRPC WH

Series	Lumens	Color Temperature	Color Rendering Index
6RLS 6" Juno Basics Surface Mount	07LM 700 Nominal Lumens	27K 2700K	90CRI 90+ CRI

Voltage	Driver	Finish
120 120V	FRPC Forward/Reverse Phase Cut	WH White



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925 • Visit us at [www.acuitybrands.com/juno-recessed](#)

Printed in U.S.A. ©2017 Acuity Brands Lighting, Inc. Rev. 10/26/17

6" BASICS SERIES™

LED SURFACE MOUNT FIXTURE

FOR J-BOX OR RECESSED HOUSING INSTALLATION

6RLS 07LM

PHOTOMETRICS

PHOTOMETRIC REPORT


Test Report #: PT11153003R

Catalog No: 6RLS 07LM 27K 90CRI 120

FRPC WH

Luminaire Spacing Criteria: 1.28

Luminaire LPW: 71



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	241
5	240
15	233
25	217
35	195
45	166
55	132
65	95
75	57
85	27
90	16

AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Walls 50%, Floors 20%

Spacing	RCR1	RCR3	RCR5
4'	47	36	28
5'	30	23	18
6'	21	16	13
7'	17	13	10
8'	13	10	8
9'	10	8	6
10'	8	6	5

INITIAL FOOTCANDLES

(One Unit: 10.4W, 116° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4'	15.1	12.9
6'	6.7	19.3
8'	3.8	25.7
10'	2.4	32.1

LUMINANCE (Average cd/m²)

Angle in Degrees	Average 0-90°
45°	15174
55°	14878
65°	14508
75°	14312
85°	20030