



Trulux Standard Tape Light

Build an economical and versatile layered lighting system with Standard Trulux. Light output ranges from 140-155 lumens per foot, with easy to work with run lengths up to 32.8 feet. Wall controls include dial or touch versions; also pair with the Trulux App for even greater control freedom.

Features

- Excellent color rendering (94+ CRI)
- Color temperatures available from 2400K to 4000K
- 140-155 lumens per foot performance
- Consuming only 2.7 watts per foot
- Dimmable with most electronic low voltage (ELV) dimmers
- Run lengths up to 32.8 feet (24V) and 27 feet (12V)
- Cuttable every 6.56" (24V) and 3.94" (12V) while maintaining cULus Listing
- 2835 LEDs last up to 50,000 hours rated life
- Available in (IP54) unjacketed and (IP65) jacketed versions



Unjacketed



Jacketed

Applications

- Edge lighting
- Cabinetry
- Shelving
- Coves
- Staircases
- Toe kicks
- Display cases
- Light boxes

Trulux Wireless Controllers

Complete your tape light install with our exclusive Trulux controllers. Featuring a battery operated design perfect for remodel applications.

See pages (16-17) for details



High 94+ CRI LEDs

Cuttable every 6.56" (24V) / 3.94" (12V)

1.30" LED spacing



2400K
Deluxe Warm White
2.7W per ft / 140Lm per ft

2700K
Ultra Warm White
2.7W per ft / 146Lm per ft

3000K
Warm White
2.7W per ft / 150Lm per ft

4000K
White
2.7W per ft / 155Lm per ft

KITS



STL-UWX (16.4ft)
STL-UWX-33 (32.8ft)

STL-UWW (16.4ft)
STL-UWW-33 (32.8ft)

STL-WW (16.4ft)
STL-WW-33 (32.8ft)

STL-WH (16.4ft)
STL-WH-33 (32.8ft)



STL65-UWX (16.4ft)

STL65-UWW (16.4ft)

STL65-WW (16.4ft)

STL65-WH (16.4ft)

REELS



Unavailable

STL-UWW-100 (100ft)

STL-WW-100 (100ft)

Unavailable



Unavailable

Unavailable

STL-WW-100-12V (100ft)

Unavailable

CUSTOM CUT



STL-UWX-CC

STL-UWW-CC

STL-WW-CC


STL-WH-CC

STL (IP54) Kits include: Attached 3ft lead wires / (3) TL-CONKIT. STL65 (IP65) Kits include: (1) Male (1) Female connectors / (3) TL-CONKIT


Building a Single Color Trulux System?

See pages (16-17) for compatible single color Trulux controllers and accessories


WIRELESS SINGLE ZONE SETUP



Push Dial Controller
(Single zone)




LED-DR 12V / 24V Driver
(30W, 60W, 100W, 150W)




Trulux RF Receiver
(Required)


WIRELESS 4 ZONE SETUP



Touch Slider Controller
(4 zone)




LED-DR 12V / 24V Driver
(30W, 60W, 100W, 150W)

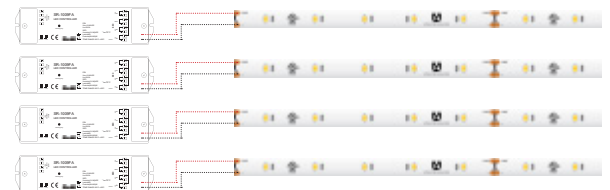

Trulux RF Receivers
(Receiver required per zone)

PRIMARY SIDE DIMMING



Standard Dimmer



ELV 12V / 24V Driver
(30W, 45W, 60W, 80W)



TRULUX™ HIGH OUTPUT



Trulux High Output Tape Light

Use high output Trulux tape light and extrusions to build your own task lighting systems or custom linear lighting fixtures. Light output ranges from 285-310 lumens per foot, with easy to work with run lengths up to 22 feet.

Features

- Excellent color rendering (94+ CRI)
- Color temperatures available from 2400K to 4000K
- 285-310 lumens per foot performance
- Consuming only 4.6 watts per foot
- Dimmable with most electronic low voltage (ELV) dimmers
- Run lengths up to 22 feet
- Cuttable every 3.94" while maintaining cULus safety rating
- 2835 LEDs last up to 50,000 hours rated life
- Available in (IP54) unjacketed and (IP65) jacketed versions



Unjacketed



Jacketed


Applications


- Edge lighting
- Task lighting
- Shelving
- Coves
- Staircases
- Toe kicks
- Railings
- Cabinetry

Trulux 4 zone Controller

The Trulux 4 zone allows for you to control multiple areas of your home from a single control

See pages (16-17) for details

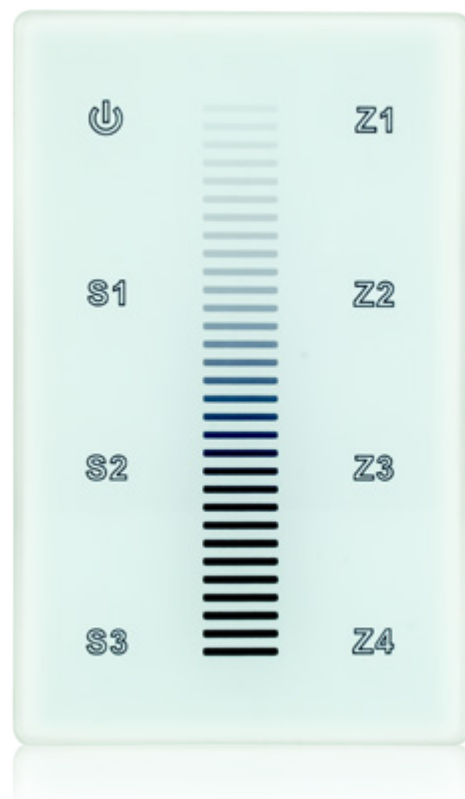

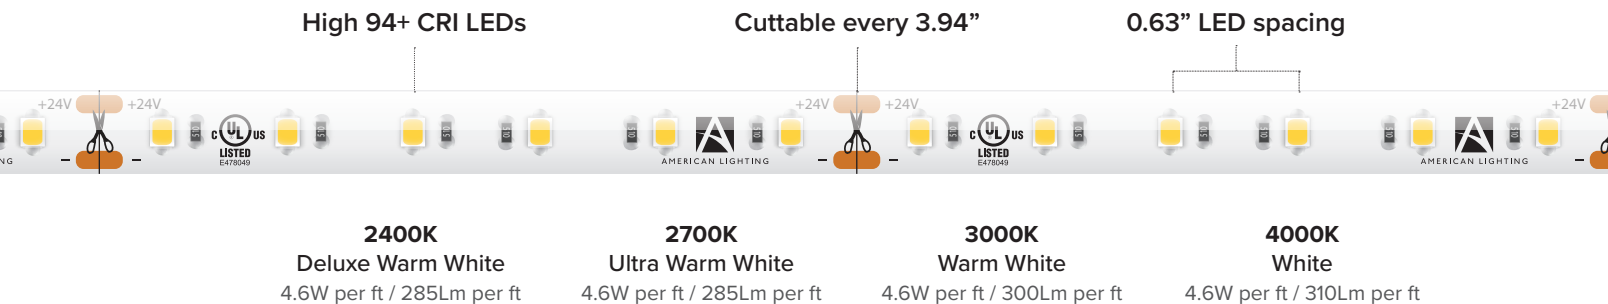

KITS

	HTL-UWX (16.4ft)	HTL-UWW (16.4ft)	HTL-WW (16.4ft)	HTL-WH (16.4ft)
	Unavailable	HTL65-UWW (16.4ft)	HTL65-WW (16.4ft)	Unavailable

REELS

	Unavailable	HTL-UWW-100 (100ft)	HTL-WW-100 (100ft)	Unavailable
--	-------------	----------------------------	---------------------------	-------------

CUSTOM CUT

	HTL-UWX-CC	HTL-UWW-CC	HTL-WW-CC	HTL-WH-CC
--	-------------------	-------------------	------------------	------------------

HTL (IP54) Kits include: Attached 3ft lead wires / (3) TL-CONKIT
HTL65 (IP65) Kits include: (1) Male (1) Female connectors / (3) TL-CONKIT


Building a Single Color Trulux System?

See pages (16-17) for compatible single color Trulux controllers and accessories


WIRELESS SINGLE ZONE SETUP



Push Dial Controller
(Single zone)




LED-DR 24V Driver
(30W, 60W, 100W, 150W)




Trulux RF Receiver
(Required)


WIRELESS 4 ZONE SETUP



Touch Slider Controller
(4 zone)




LED-DR 24V Driver
(30W, 60W, 100W, 150W)

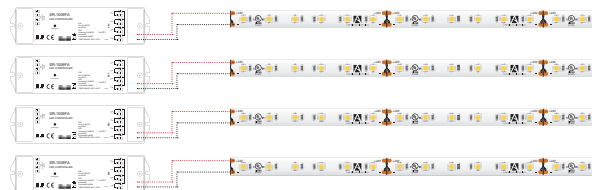

Trulux RF Receivers
(Receiver required per zone)

PRIMARY SIDE DIMMING



Standard Dimmer



ELV 24V Driver
(30W, 45W, 60W, 80W)





Trulux Spec Grade Tape Light

At full brightness our Specification tape offers up to 570 lumens per foot and can be used for both task or ambient lighting when dimmed with our Trulux controls. The superior light output is best used in large, open spaces in both residential or commercial applications.

Features

- Excellent color rendering (94+ CRI)
- Color temperatures available from 2400K to 4000K
- 480-570 lumens per foot performance
- Dimmable with most electronic low voltage (ELV) dimmers
- Run lengths up to 13.1 feet
- Cuttable every 1.97" while maintaining cULus Listing
- 2835 LEDs last up to 50,000 hours rated life
- Available in (IP54) unjacketed and (IP65) jacketed versions



Unjacketed



Jacketed

Applications


- Edge lighting
- Cabinetry
- Shelving
- Coves
- Staircases
- Toe kicks
- Display cases
- Light boxes

Trulux Mobile App

Download our mobile app and sync to any Trulux system for complete lighting control in your home from a single device

See pages (42-43) for details



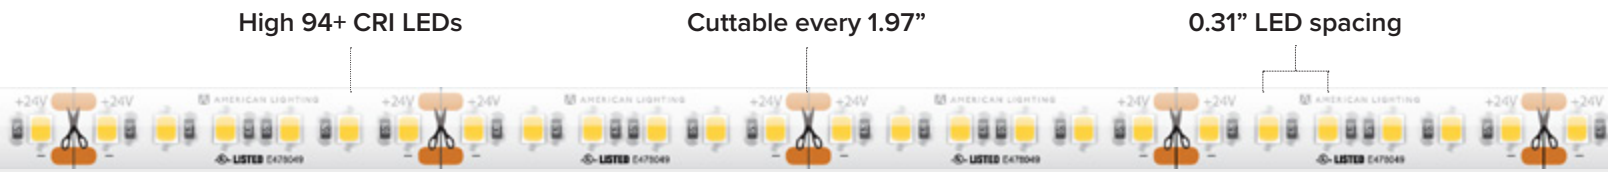

2400K Deluxe Warm White 7.8W per ft / 480Lm per ft	2700K Ultra Warm White 7.8W per ft / 485Lm per ft	3000K Warm White 7.8W per ft / 525Lm per ft	4000K White 7.8W per ft / 570Lm per ft
--	---	---	--

KITS



SPTL-UWX (13.1ft)

SPTL-UWW (13.1ft)

SPTL-WW (13.1ft)

SPTL-WH (13.1ft)



SPTL65-UWX (13.1ft)

SPTL65-UWW (13.1ft)

SPTL65-WW (13.1ft)

SPTL65-WH (13.1ft)

CUSTOM CUT



SPTL-UWX-CC

SPTL-UWW-CC

SPTL-WW-CC


SPTL-WH-CC

SPTL (IP54) Kits include: Attached 3ft lead wires / (3) TL-CONKIT
SPTL65 (IP65) Kits include: (1) Male / (1) Female connectors / (3) TL-CONKIT

Building a Single Color Trulux System?

See pages (16-17) for compatible Tunable CCT Trulux controllers and accessories


WIRELESS SINGLE ZONE SETUP



Push Dial Controller
(Single zone)




LED-DR 24V Driver
(30W, 60W, 100W, 150W)



Trulux RF Receiver
(Required)


WIRELESS 4 ZONE SETUP



Touch Slider Controller
(4 zone)




LED-DR 24V Driver
(30W, 60W, 100W, 150W)

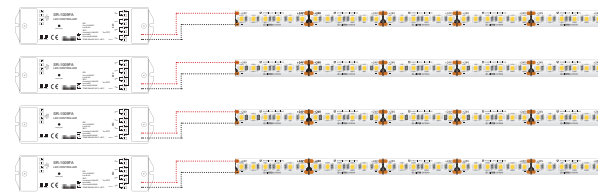

Trulux RF Receivers
(Receiver required per zone)

PRIMARY SIDE DIMMING



Standard Dimmer



ELV 24V Driver
(30W, 45W, 60W, 80W)



TRULUX™ SINGLE COLOR CONTROL

1-100% full range dimming via dial or touch slide wall controls let you have full control over your Trulux system featuring ultra sensitive glass faceplates for full clarity even when used for years. No flickering, no signal wiring, no input wiring. Simply mount to the wall and sync with Trulux receivers.



SRF-BATT

Trulux Push Dial Wall Control
(Single Color / Single Zone)

- Push dial On/Off control dimmer
- Full range dimming (1-100%)
- Glass faceplate with satin nickel dial
- Wireless installation - No power wire
- Pair multiple receivers to a single control
- RF signal (up to 65 feet)
- Battery powered (CR2032)
- Requires Trulux receiver for install



SRF-4Z-3P

Trulux Touch Slider Wall Control
(Single Color / 4 Zones / 3 Scenes)

- Touch On/Off control
- Touch slider full range dimming (1-100%)
- Glass faceplate with back-lit buttons
- Wireless installation - No power wire
- 3 programmable scenes
- 4 dedicated zone selection
- Pair multiple receivers to a single control
- RF signal (up to 65 feet)
- Battery powered (CR2032)
- Requires Trulux receiver for install



TRULUX MOBILE APP


Multi Zone Trulux Controller
(Multi Color / Multi Room or Zones)

- Mobile Phone or Tablet App ready
- Interactive dial controls
- Set up to 8 dedicated rooms or zones
- Create and save custom settings
- Control all single color, Tunable CCT, and RGB/RGB+WW installations simultaneously
- Use in addition to any Trulux controllers or as a standalone system
- Requires TruHub (RF-WIFI-8) router and receivers for 2 to 8 zone installations; or the RF to Wifi receiver (REC-5A-4Z-WIFI) for single zone applications

Available on Google Play & App Store:



TRULUX™ MOBILE APP For more details see pages (42-43)

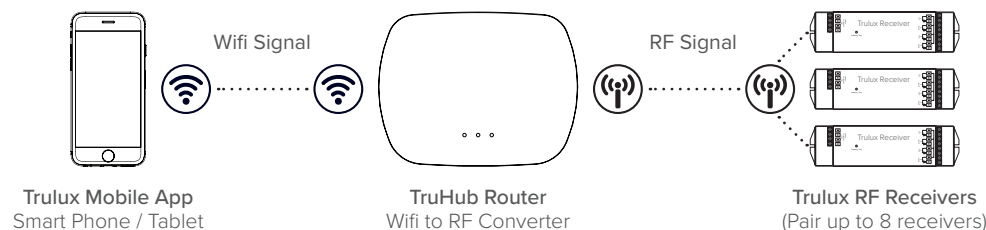

TRULUX™ SINGLE COLOR ACCESSORIES


Building a Trulux system is easy! Our Trulux controllers feature wireless technology that makes installation a breeze. All that's required is a 120V power source to a 24V driver which is then fed to a Trulux receiver. Wire your tape to the receiver, sync the receiver to the controller, and you're all set.

TRULUX SINGLE ZONE



Single Zone Push Dial
Wireless RF Wall Controller

SRF-BATT



LED-DR 24V Driver

LED-DR30-24 (30W)
LED-DR60-24 (60W)
LED-DR100-24 (100W)
LED-DR150-24 (150W)



Trulux RF Receiver
(Required)


REC-5A-4Z

TRULUX 4 ZONE



4 Zone Touch Slider
Wireless RF Wall Controller

SRF-4Z-3P



LED-DR 24V Driver

LED-DR30-24 (30W)
LED-DR60-24 (60W)
LED-DR100-24 (100W)
LED-DR150-24 (150W)



Trulux RF Receiver
(Receiver required per zone)

REC-5A-4Z

TRULUX APP MULTI ZONE



Trulux Mobile App
Mobile Phone / Tablet
(Control up to 8 rooms/zones)



LED-DR 24V Driver

LED-DR30-24 (30W)
LED-DR60-24 (60W)
LED-DR100-24 (100W)
LED-DR150-24 (150W)



Trulux TruHub
Wifi to RF Wireless Router
(Required for 2 - 8 zone installations)

WIFI-RF-8



Trulux RF Receiver
(Receiver required per zone)


REC-5A-4Z

For more on the Trulux App
see pages (42-43)

ALTERNATE DIMMING



Primary Side Dimming
Standard Dimmer



ELV 24V Driver

ELV-30-24 (30W)
ELV-45-24 (45W)
ELV-60J-24 (60W)
ELV-80J-24 (80W)

For more on Trulux receivers and power supplies,
see pages (44-45) for additional information

ADDITIONAL ACCESSORIES



TL-CONKIT

Trulink 4-in-1
Connector Kit
(Qty of 10)



TL-BLKS

Trulink 4-in-1
Connector Block
(Qty of 10)



TL-2SPL

Splice Connector
TL-2L (L) Snap connector
TL-2T (T) Snap connector
TL-2X (X) Snap connector



TL-2JUMP-.5 (6")

TL-2JUMP-1 (12")
TL-2JUMP-2 (24")
Single Color
IP54 - Jumper



TL-2DC

Snap connector
to DC jack



TL-2JUMP65-.5 (6")

TL-2JUMP65-1 (12")
TL-2JUMP65-2 (24")
Single Color
IP65 - Jumper