

Fan & Fixture Mounting Boxes

Locator posts for positioning of bracket installation screws



EACH FAN/FIXTURE BOX INCLUDES...

A ready-to-tighten center screw, installed NM cable connector, mud cover, multiple KOs, and two screws for fan/fixture bracket installation (screwed in place until removed by installer).

Our lowest cost L-shaped fan/fixture boxes mount securely to single or double joists with a shipped-in-place center screw.


FEATURES AND BENEFITS

- No loose parts to misplace—totally self-contained!
- Locator posts assure proper positioning of fan/fixture bracket
- Competitively priced
- Fan/fixture installation screws are parked...ready for easy fan/fixture bracket installation!
- UL rated: 70 lb fan, 200 lb fixture; CSA rated: 50 lb fan/fixture
- 2-Hour Fire Rating

| CATALOG NUMBER | UPC/DCI/NAED MFG #018997 | DESCRIPTION / CU. IN. | UNIT PKG | STD PKG | DIM A | DIM B | DIM C | DIM D |
|----------------|--------------------------|--|----------|---------|-------|-------|-------|-------|
| FB442 | 72194 | For 1/2" or 5/8" drywall 13.4 cu. in. | 25 | 25 | 4.236 | 3.773 | 4.250 | 3.273 |
| FB443 | 72197 | For 1/2" or 5/8" drywall 18.3 cu. in. | 25 | 25 | 4.236 | 5.071 | 4.250 | 4.571 |

Note: Install fan or fixture (not included) in accordance with manufacturer's instructions and all local applicable electrical codes, using the parked screws provided. Refer to chart on page R-24 for load ratings and number of single conductors.

PATENTED.

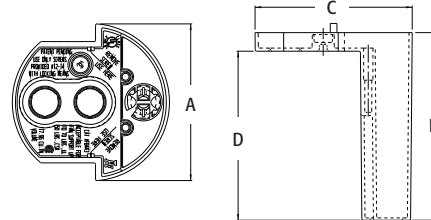

INSTALLATION INSTRUCTIONS



1 Position box alongside joist. Tighten center screw, mounting box to joist.



2 Position mounting bracket over locator posts to assure proper position. Pull wires through KO.



3 Remove captive bracket installation screws. Use them to mount fan/fixture bracket. (Installation of drywall not shown.)