


WIRE BASKET SYSTEM

Triple Rod Reinforced Tray (4" Depth) [CAT4-(W)SL-120]

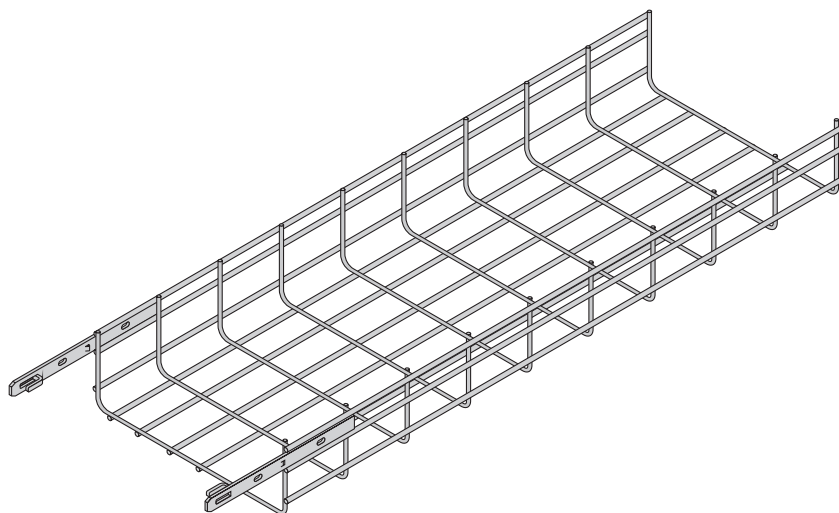

- Triple rod reinforced tray is 4" high
- Standard length of tray is 10'
- **Standard Finish**
EG – Electro-Plated Zinc Galvanized per ASTM B633 Type III, SC3 (Thickness: 0.000472" [12µm])
- **Special Order Finishes**
HG – Hot Dip Galvanized per ASTM A123 GRD.55 (Thickness: 0.0002165" [55µm])
SS – 304 Type Stainless Steel
S1 – 316 TYPE STAINLESS STEEL
ZD – DICHROMATE per ASTM B633 Type II, SC3 (Thickness: 0.000472" [12µm])
OTHER – Powder coating available
- No hardware required to connect straight sections
- For continuous grounding use CAT-GC

Approvals		Part Description		Width Nominal	Dimensions Wire Dia (in.)	Wt. (piece)	Loading (lb/ft)			
UL	CSA						5' Span	6' Span	8' Span	9' Span
			CAT4-04SL-120	4" (100mm)	0.197	11.2	108	75	42	33
			CAT4-08SL-120	8" (200mm)	0.197	15.9	108	75	42	33
			CAT4-12SL-120	12" (300mm)	0.236	32.4	182	127	71	56
			CAT4-16SL-120	16" (400mm)	0.236	41.0	182	127	71	56
			CAT4-18SL-120	18" (450mm)	0.236	36.7	182	127	71	56
			CAT4-20SL-120	20" (500mm)	0.236	41.0	182	127	71	56
			CAT4-24SL-120	24" (600mm)	0.236	50.0	182	127	71	56

Load Values are determined by NEMA VE1 testing. Copies of load tests available upon request.

Safety Factor 1.5

Project: _____
 Architect / Engineer: _____
 Date: _____ Phone: _____
 Contractor: _____
 Address: _____

Approval Stamp:

Notes 1: _____

Notes 2: _____