



SPECIFICATIONS
AK917
 HEATER WITH EXHAUST FAN



70 CFM/3.5 Sones @ 0.10" SP.

• **Grill**

White, polymeric grill (flame retardant ABS UL rated 94-5V) secured in place with torsion springs; easily removed if necessary, dimensions - 10" x 10".

• **Blower Wheel**

One piece polymeric wheel, 3⁷/₈" diameter, 2¹/₂" wide with 21 fins.

• **Motor**

Heavy duty, plug in 2 pole motor. Life time lubrication, thermally protected. Rated 120 volts, 60 hz.

• **Fan Housing**

23 gauge galvanized steel housing. Dimensions 8¹/₄" x 8" x 5⁷/₈".

• **Duct Collar**


Plastic collar for 4" duct connection, comes complete with built in non-metallic back draft damper for quiet operation.

• **Ventilating Area**

For bathrooms up to 70 sq. ft.

• **Lamping Information**

1 - 250 watt maximum, type R40 bulb, medium base, 850 Btu. with shaped aluminum socket housing with porcelain socket. (lamp not included)

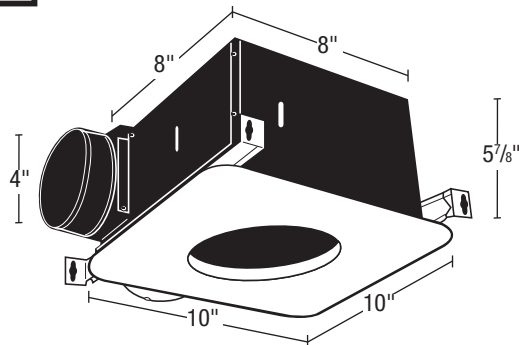

• **Unit Mounting**

The housing will mount in ceilings with at least 6" of clearance and through drywall thickness up to 3/4", with a rough-in opening of 8¹/₄" x 8". Rated for ceilings insulated to R-40. The housing will mount between 16" on center joists, using the 4 supplied housing mounting rails.

• **Single Pack Shipping Info**

Box Dim: 14¹/₄" x 11¹/₂" x 7³/₄"

UPC: 0-8316227001-6

Shipping Weight: 7 lbs.

EXPANDED PERFORMANCE

	Static Pressure (inches of w.g.)							Sones @ .1 SP	Fan Speed RPM	Maximum Fan Watts	Amps
	0	0.05	0.1	0.15	0.2	0.25	0.3				
Air Flow - CFM			70					3.5			2.6

PROJECT							ARCHITECT				
LOCATION							ENGINEER				
CONTRACTOR							SUBMITTED BY			DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS		



Air King: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada:
 Brampton, Ontario
 Tel: 905-456-2033
 Fax: (905) 456-1015