

Pro

ProConnect 27R/mw



FEATURES

- Straight blade ANSI NEMA type receptacles.
- Available in 125v AC and 250v AC.
- Receptacles will accept 15 Amp or 20 Amp plugs.
- Choice of corrosion resistant enclosures in cast marine brass, copper free aluminum or non-metallic.
- Flush mount and GFCI versions available.
- Square, round or semi-oval face receptacles available.

APPLICATIONS

- Marine interior

APPROVALS

- Conforms to IP20
- ABS

TECHNICAL SPECIFICATIONS

BOX/COVER

Box	Cover
Marine brass	Marine brass
Copper free aluminum	Stainless steel
Non-metallic	Non-metallic

ENTRIES

Standard units undrilled. Up to 3/4" NPT through feed available. See ENTRY OPTIONS for selections.

VOLTAGE AND CURRENT

RECEPTACLE

15/20 Amp 125v AC ANSI NEMA 5-15/20R

15/20 Amp 250v AC ANSI NEMA 6-15/20R

VOLTAGE AND CURRENT

SWITCH

15 Amp 277v AC max

20 Amp 277v AC max

30 Amp 250v AC max

MOUNTING

Surface, via 2 maximum #10 mounting bolts (not included).

ORDERING REFERENCES

PART NUMBER	DESCRIPTION	WEIGHT LBS
2700B	MARINE BRASS, Blank Cover with Box	1.8
2704B-125	MARINE BRASS, One Rectangular Face Single Receptacle	2.0
2705B-125	MARINE BRASS, One Rectangular Face Double Receptacle	2.0
2753B-125	MARINE BRASS, One Round Face Single Receptacle	2.0
2754B-125	MARINE BRASS, Two Semi-Oval Face Receptacle	2.0
2700A	ALUMINUM, Blank Cover with Box	0.8
2704A-125	ALUMINUM, One Rectangular Face Single Receptacle	0.9
2705A-125	ALUMINUM, One Rectangular Face Double Receptacle	0.9
2753A-125	ALUMINUM, One Round Face Single Receptacle	0.9
2754A-125	ALUMINUM, Two Semi-Oval Face Receptacle	0.9
2704PL-125	NON-METALLIC, One Rectangular Face Single Receptacle	0.7
2705PL-125	NON-METALLIC, One Rectangular Face Double Receptacle	0.7
2753PL-125	NON-METALLIC, One Round Face Single Receptacle	0.7
2754PL-125	NON-METALLIC, Two Semi-Oval Face Receptacle	0.7

SPECIAL OPTIONS

GF* - 120v Ground Fault Circuit Interrupter
 F - Flush Mount Unit
 -250 - 20A 250v AC

*For double receptacle 120v only, no -250 option.

ENTRY OPTIONS


NPT Trade Size	Dead End	Thru Feed
1/2"	E1	C1
3/4"	E2	C2

SPARE PARTS

Part No.	Description
INX6559B/A/PL	COVER, BRASS (B), ALUMINUM (A) OR NON-METALLIC (PL), One Square Face Single or Double Receptacle
INX6684B/A/PL	COVER, BRASS (B), ALUMINUM (A) OR NON-METALLIC (PL), One Round Face Receptacle
INX6685B/A/PL	COVER, BRASS (B), ALUMINUM (A) OR NON-METALLIC (PL), Two Semi-Oval Receptacles
INX6032B/A	COVER, BRASS (B), ALUMINUM (A) OR NON-METALLIC (PL), Blank Cover
INX6560B/A/PL	FLUSH COVER, BRASS (B), ALUMINUM (A) OR NON-METALLIC (PL), One Square Face Single or Double Receptacle
INX6688B/A/PL	FLUSH COVER, BRASS (B), ALUMINUM (A) OR NON-METALLIC (PL), One Round Face Receptacle
INX6689B/A/PL	FLUSH COVER, BRASS (B), ALUMINUM (A) OR NON-METALLIC (PL), Two Semi-Oval Receptacles
INX6033B	BOX, BRASS
INX6033A	BOX, ALUMINUM
INX6033PL	BOX, NON-METALLIC
INX3277	RECEPTACLE, 20A 125v, One Square Face Receptacle
INX3130	RECEPTACLE, 20A 125v, One Square Face Double Receptacle
INX3171	RECEPTACLE, 20A 125v, One Round Face Receptacle
INX3329	RECEPTACLE, 20A 125v, One Square Face GFCI Double Receptacle
INX3164	RECEPTACLE, 20A 125v, Two Semi-Oval Face Receptacles
INX3278	RECEPTACLE, 20A 250v, One Square Face Receptacle
INX3131	RECEPTACLE, 20A 250v, One Square Face Double Receptacle
INX3172	RECEPTACLE, 20A 250v, One Round Face Receptacle
N/A	RECEPTACLE, 20A 250v, One Square Face GFCI Double Receptacle
INX3165	RECEPTACLE, 20A 250v, Two Semi-Oval Face Receptacles
2503NR-125	NYLON PLUG, Plug 5-15P, 15 Amp, 125v AC Max
2506NR-125	NYLON PLUG, Plug 5-20P, 20 Amp, 125v AC Max

ProConnect **27R**/mw

DIMENSIONS

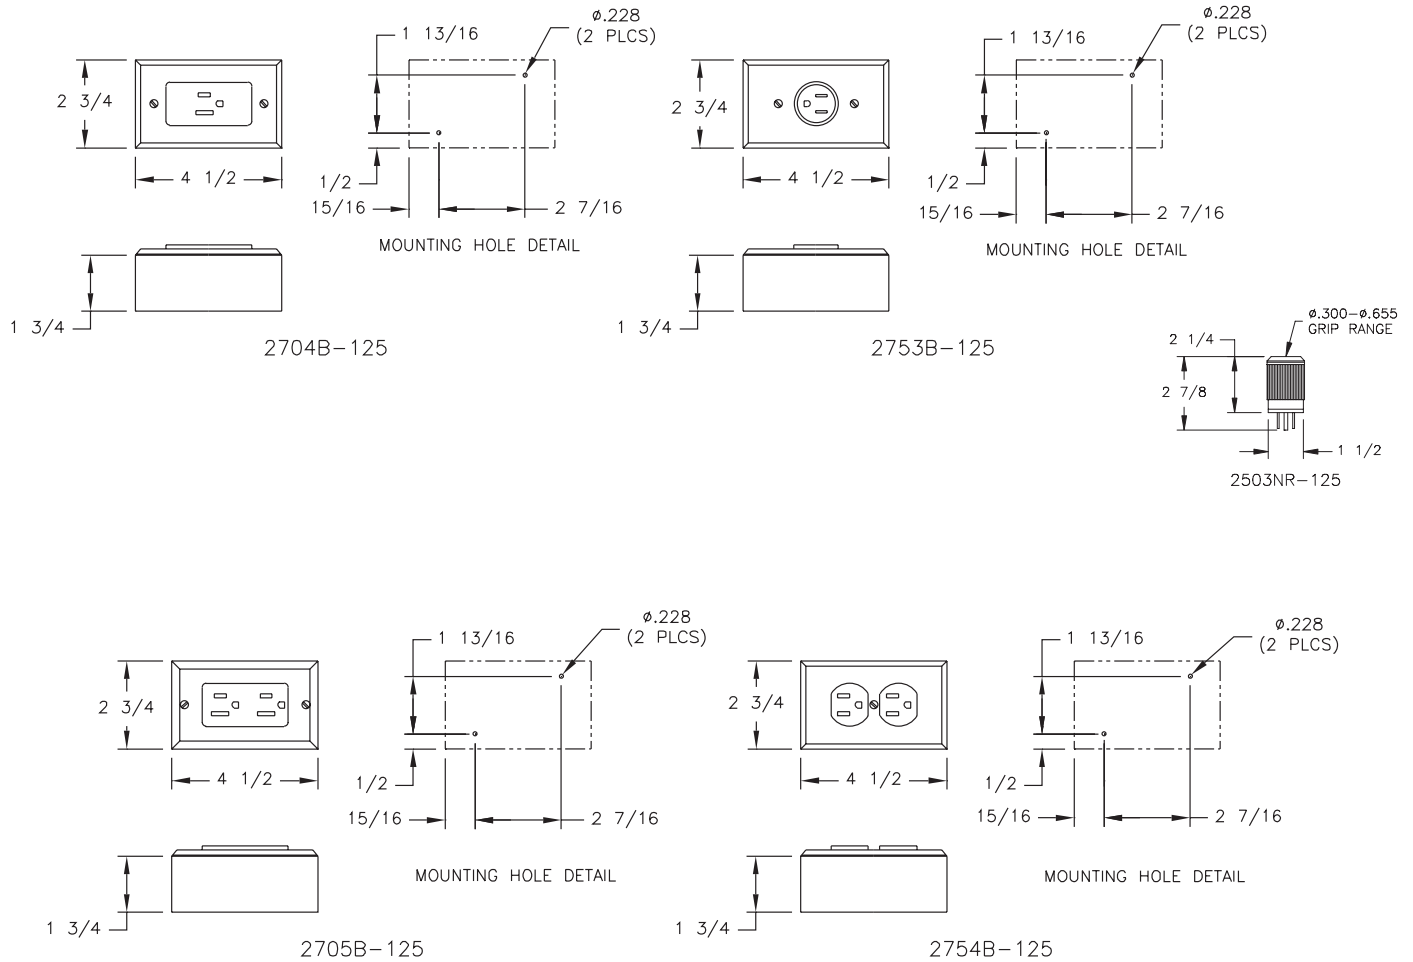

Dimensions in inches

NOTES