


# XPF

## XPFXchange EP833/EP834/mw

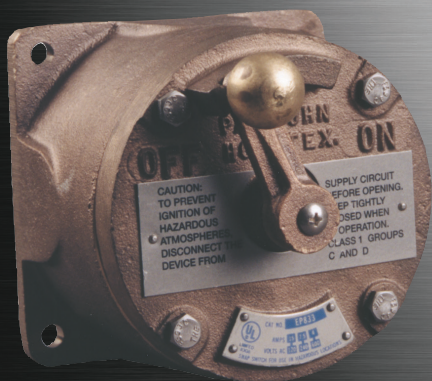

### FEATURES

- Single throw double-pole snap switch
- Cast marine brass construction
- Heavy duty mounting pads
- Silicone lubricant provided for cover screws and flange
- Flame-tight, close tolerance threaded switch stem
- Available in 15 or 20 amp units

### APPLICATIONS

- Class I, Division 1 explosive atmospheres
- Alarm/warning indication
- Marine and watertight requirements
- Oil and gas exploration and production
- Fuel dispensing facilities

### APPROVALS

- Class I, Divisions 1 & 2, Groups C, D
- Conforms to IP66
- ABS

### STANDARDS

- UL1203

### TECHNICAL SPECIFICATIONS

#### BOX/COVER

Cast marine brass

#### SWITCH STEM

Free machining brass

#### HARDWARE

Stainless steel

#### ENTRIES

Standard one 1/2" NPT outlet. Up to four 3/4" NPT outlets available. See ENTRY OPTIONS for selections.

#### SWITCHES

Spring loaded double pole single throw

#### VOLTAGE AND CURRENT

##### EP833:

15 amp, 125 VAC  
10 amp, 24 VDC  
2 amp, 125 VDC

##### EP834:

20 amp, 600 VAC  
15 amp, 24 VDC  
5 amp, 125 VDC

#### MOUNTING

Surface, via four 1 1/2" mounting bolts (not included)

ORDERING REFERENCES

PART NUMBER	DESCRIPTION	WEIGHT LBS
EP833	15 amp, 120 VAC	10.0
EP834	20 amp, 600 VAC	10.0


ENTRY OPTIONS

NPT Trade Size	Dead End	Thru Feed	90 degree	X-positions
1/2"	Std	C1	L1	X1
3/4"	E2	C2	L2	X2

SPARE PARTS

Part No.	Description
INX6040B	BOX
INX8017B	HANDLE
GKT1041	"O" RING
INX3058	INTERIOR SWITCH, EP833
INX3118EP	INTERIOR SWITCH, EP834

DIMENSIONS

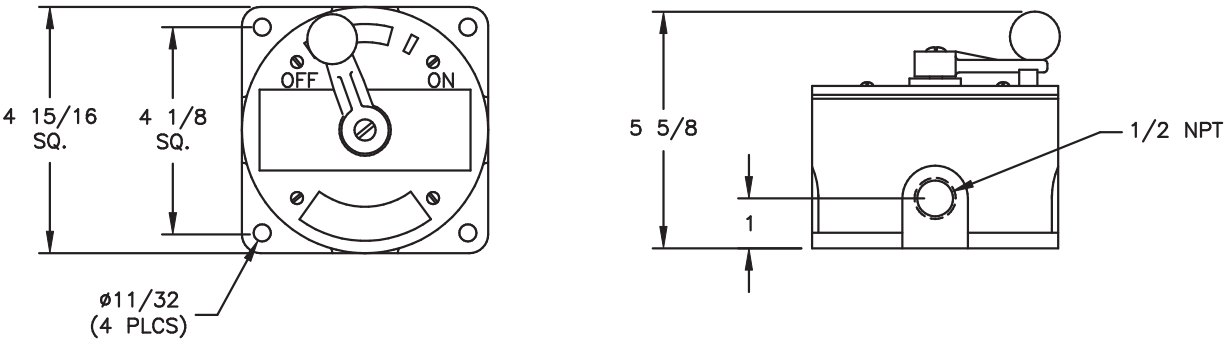

EP833/EP834

Dimensions in inches