

## Applications:

- Marine and watertight requirements

## Features:


- Water shedding inverted mounting style
- Suitable for horizontal wall mount
- Watertight straight blade ANSI NEMA type receptacle
- Accepts standard ANSI NEMA type plugs
- Optional two-pole rotary switch combinations
- Available mating metal or nylon plugs with integral threaded ring maintain a watertight seal
- Neoprene gasket resists petroleum
- Cast marine brass or copper-free aluminum construction available
- Captive threaded receptacle cap
- Heavy duty mounting pads
- Silicone lubricant provided for cover screws and flange
- Available in 125 VAC and 250 VAC
- Receptacles will accept 15 or 20 ampere plugs

## Certifications and compliances:

- Conforms to IP66
- ABS

## Standard materials:

- Plug body – zinc plated brass with PBT enclosure (A series only); brass with PBT enclosure (B series only)
- Box and cover – cast marine brass or copper-free aluminum
- Caps and ring – marine brass or zinc plated brass
- Hardware – stainless steel
- Gasket – one-piece neoprene

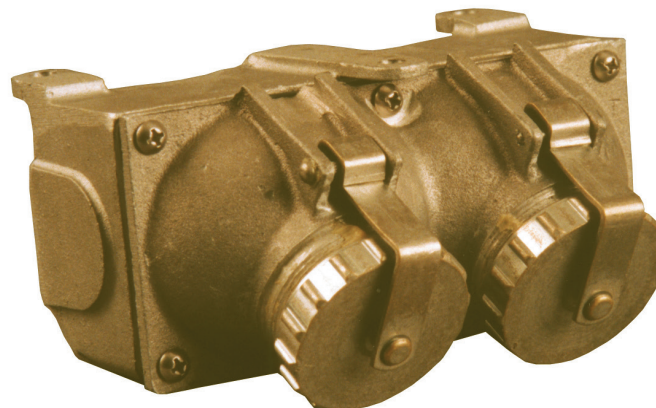

## Technical specifications:

- Entries – standard units undrilled; up to 3/4" NPT through feed available

### Voltage and current ratings:

#### Receptacle

- 15/20 amperes, 125 VAC, ANSI NEMA 5-15/20R
- 15/20 amperes, 250 VAC, ANSI NEMA 6-15/20R

#### Switch

- 20 amperes, 120/240 VAC
- 1 HP at 120 VAC or 2 HP at 240 VAC

#### Plug

- 15 amperes, 125 VAC, ANSI NEMA 5-15P
- 20 amperes, 125 VAC, ANSI NEMA 5-20P
- 15 amperes, 250 VAC, ANSI NEMA 6-15P
- 20 amperes, 250 VAC, ANSI NEMA 6-20P

## Options:

### Description

- 250 VAC..... **Suffix 250A**

## Entry options:


| NPT trade size | Dead end | Through feed |
|----------------|----------|--------------|
| 1/2"           | E1       | C1           |
| 3/4"           | E2       | C2           |

## Ordering information:

| Cat. #      | Description                               | Material     | Weight (lbs.) |
|-------------|-------------------------------------------|--------------|---------------|
| 2632BU-125  | Surface mount, one receptacle             | Marine brass | 2.75          |
| 2634BU-125  | Surface mount, two receptacles            | Marine brass | 4.75          |
| 2636BU-125  | Surface mount, three receptacles          | Marine brass | 6.50          |
| 2640BU-125  | Surface mount, one receptacle with switch | Marine brass | 4.75          |
| 2634BUF-125 | Flush mount, two receptacles              | Marine brass | 5.75          |
| 2640BUF-125 | Flush mount, one receptacle with switch   | Marine brass | 5.50          |
| 2632AU-125  | Surface mount, one receptacle             | Aluminum     | 1.00          |
| 2634AU-125  | Surface mount, two receptacles            | Aluminum     | 2.10          |
| 2603BU-125  | Plug, 15 amperes                          | Marine brass | 0.80          |
| 2606BU-125  | Plug, 20 amperes                          | Marine brass | 0.80          |
| 2603AU-125  | Plug, 15 amperes                          | Aluminum     | 0.80          |
| 2606AU-125  | Plug, 20 amperes                          | Aluminum     | 0.80          |

<sup>A</sup> Replace '125' in catalog number.

## Dimensions (in inches):

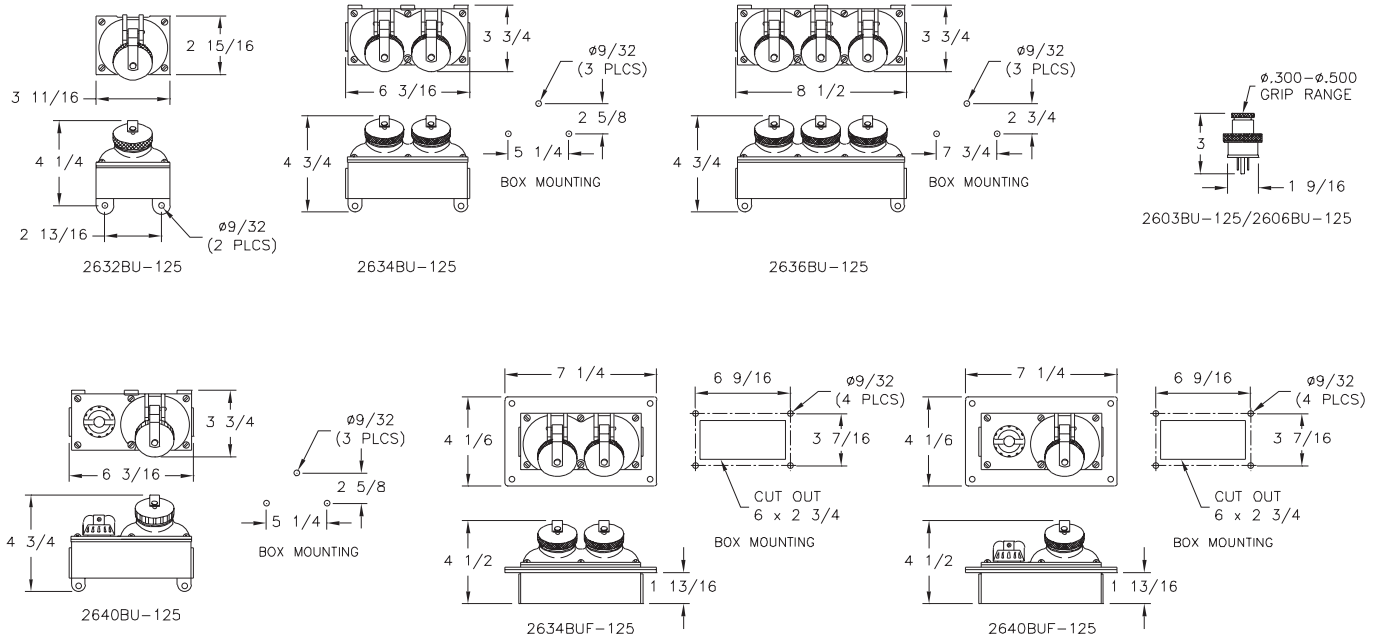

Applications:

- Marine and watertight requirements

Features:


- Extended cover provides additional wiring capacity
- Wall or surface mount
- Watertight straight blade ANSI NEMA type receptacle
- Accepts standard ANSI NEMA type plugs
- Optional two-pole rotary switch combinations
- Available mating metal or nylon plugs with integral threaded ring maintain a watertight seal
- Neoprene gasket resists petroleum
- Cast marine brass or copper-free aluminum construction available
- Captive threaded receptacle cap
- Heavy duty mounting pads
- Silicone lubricant provided for cover screws and flange
- Available in 125 VAC and 250 VAC
- Receptacles will accept 15 or 20 ampere plugs

Certifications and compliances:

- Conforms to IP66
- ABS

Standard materials:

- Plug body – zinc plated brass with PBT enclosure (A series only); brass with PBT enclosure (B series only)
- Box and cover – cast marine brass or copper-free aluminum
- Caps and ring – marine brass or zinc plated brass
- Hardware – stainless steel
- Gasket – one-piece neoprene

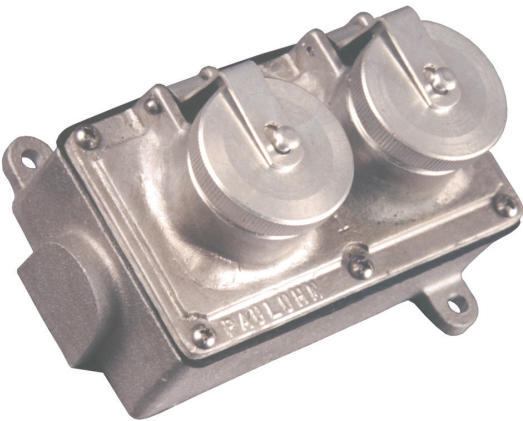

Technical specifications:

- Entries – standard units undrilled; up to 3/4" NPT through feed available

Voltage and current ratings:

Receptacle

- 15/20 amperes, 125 VAC, ANSI NEMA 5-15/20R
- 15/20 amperes, 250 VAC, ANSI NEMA 6-15/20R

Switch

- 20 amperes, 120/240 VAC
- 1 HP at 120 VAC or 2 HP at 240 VAC

Plug

- 15 amperes, 125 VAC, ANSI NEMA 5-15P
- 20 amperes, 125 VAC, ANSI NEMA 5-20P
- 15 amperes, 250 VAC, ANSI NEMA 6-15P
- 20 amperes, 250 VAC, ANSI NEMA 6-20P

Options:

| Description    | Suffix |
|----------------|--------|
| • 250 VAC..... | 250A   |

Entry options:


| NPT trade size | Dead end | Through feed |
|----------------|----------|--------------|
| 1/2"           | E1       | C1           |
| 3/4"           | E2       | C2           |

Ordering information:

| Cat. #      | Description                               | Material     | Weight (lbs.) |
|-------------|-------------------------------------------|--------------|---------------|
| 2613BU-125  | Surface mount, one receptacle             | Marine brass | 4.0           |
| 2614BU-125  | Surface mount, two receptacles            | Marine brass | 5.5           |
| 2620BU-125  | Surface mount, one receptacle with switch | Marine brass | 5.5           |
| 2613BUF-125 | Flush mount, one receptacle               | Marine brass | 4.5           |
| 2614BUF-125 | Flush mount, two receptacles              | Marine brass | 6.5           |
| 2620BUF-125 | Flush mount, one receptacle with switch   | Marine brass | 6.5           |
| 2614AU-125  | Surface mount, two receptacles            | Aluminum     | 2.0           |
| 2603BU-125  | Plug, 15 amperes                          | Marine brass | 0.8           |
| 2606BU-125  | Plug, 20 amperes                          | Marine brass | 0.8           |
| 2603AU-125  | Plug, 15 amperes                          | Aluminum     | 0.8           |
| 2606AU-125  | Plug, 20 amperes                          | Aluminum     | 0.8           |

A Replace '125' in catalog number.

## Dimensions (in inches):

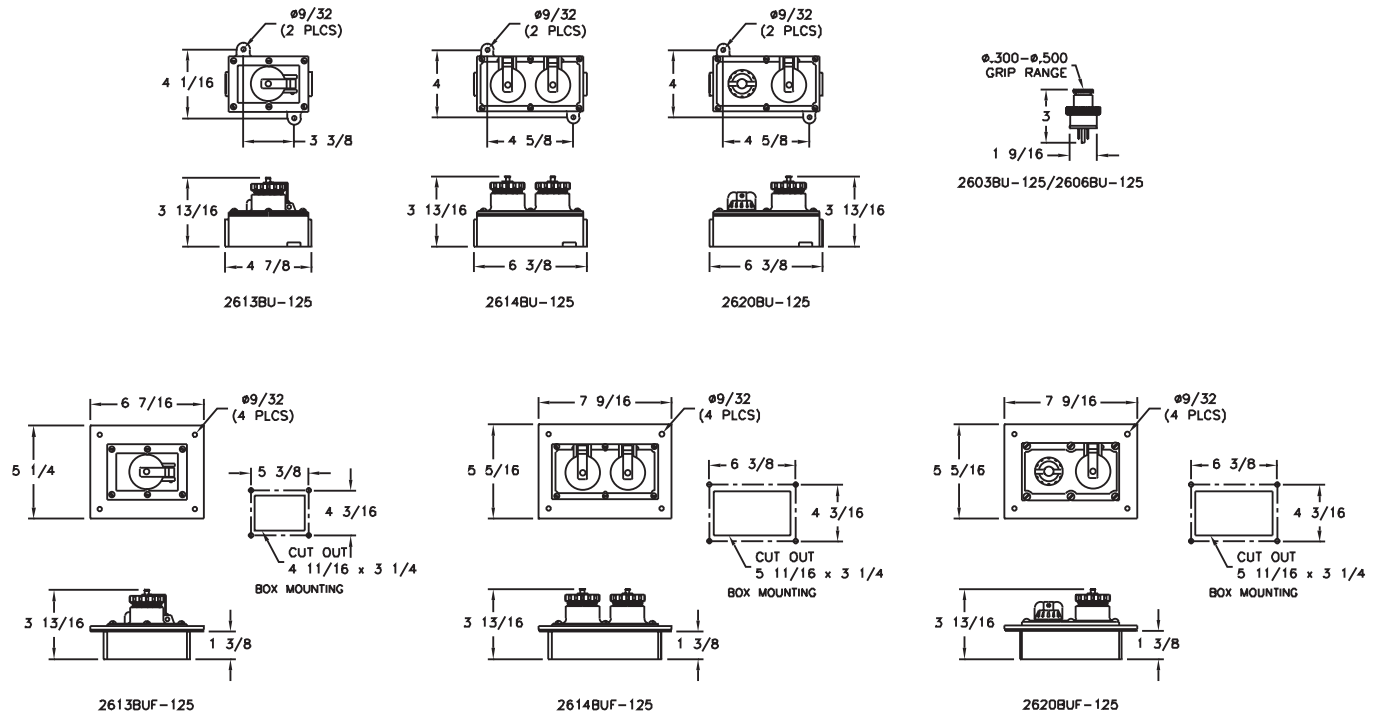

Applications:

- Marine and watertight requirements

Features:

- Wall or surface mount
- Watertight straight blade ANSI NEMA type receptacle
- Accepts standard ANSI NEMA type plugs
- Optional two-pole rotary switch combinations
- Available mating metal or nylon plugs with integral threaded ring maintain a watertight seal
- Neoprene gasket resists petroleum
- Cast marine brass or copper-free aluminum construction available
- Captive threaded receptacle cap
- Heavy duty mounting pads
- Silicone lubricant provided for cover screws and flange
- Available in 125 VAC and 250 VAC
- Receptacles will accept 15 or 20 ampere plugs

Certifications and compliances:

- Conforms to IP66
- ABS

Standard materials:

- Plug body – zinc plated brass with PBT enclosure (A series only); brass with PBT enclosure (B series only)
- Box and cover – cast marine brass or copper-free aluminum
- Caps and ring – marine brass or zinc plated brass
- Hardware – stainless steel
- Gasket – one-piece neoprene

Technical specifications:

- Entries – standard units undrilled; up to 3/4" NPT through feed available

Voltage and current ratings:

Receptacle


- 15/20 amperes, 125 VAC, ANSI NEMA 5-15/20R
- 15/20 amperes, 250 VAC, ANSI NEMA 6-15/20R

Switch

- 20 amperes, 120/240 VAC
- 1 HP at 120 VAC or 2 HP at 240 VAC

Plug

- 15 amperes, 125 VAC, ANSI NEMA 5-15P
- 20 amperes, 125 VAC, ANSI NEMA 5-20P
- 15 amperes, 250 VAC, ANSI NEMA 6-15P
- 20 amperes, 250 VAC, ANSI NEMA 6-20P

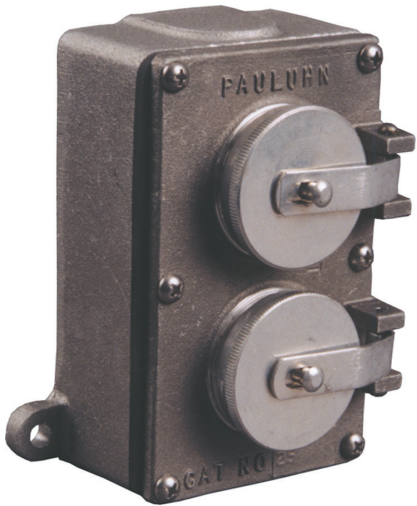

Mounting option:

- Surface mount, via two maximum 1/4" mounting bolts (not included)

Options:

| Description    | Suffix |
|----------------|--------|
| • 250 VAC..... | 250A   |

Entry options:


| NPT trade size | Dead end | Through feed |
|----------------|----------|--------------|
| 1/2"           | E1       | C1           |
| 3/4"           | E2       | C2           |

A Replace '125' in catalog number.

Ordering information:

| Cat. #    | Description                | Material     | Weight (lbs.) |
|-----------|----------------------------|--------------|---------------|
| 2583B-125 | One receptacle             | Marine brass | 3.0           |
| 2584B-125 | Two receptacles            | Marine brass | 4.0           |
| 2587B-125 | One receptacle with switch | Marine brass | 4.0           |
| 2503B-125 | Plug, 15 amperes           | Marine brass | 0.8           |
| 2506B-125 | Plug, 20 amperes           | Marine brass | 0.8           |
| 2583A-125 | One receptacle             | Aluminum     | 1.0           |
| 2584A-125 | Two receptacles            | Aluminum     | 1.5           |
| 2503A-125 | Plug, 15 amperes           | Aluminum     | 0.8           |
| 2506A-125 | Plug, 20 amperes           | Aluminum     | 0.8           |

Dimensions (in inches):

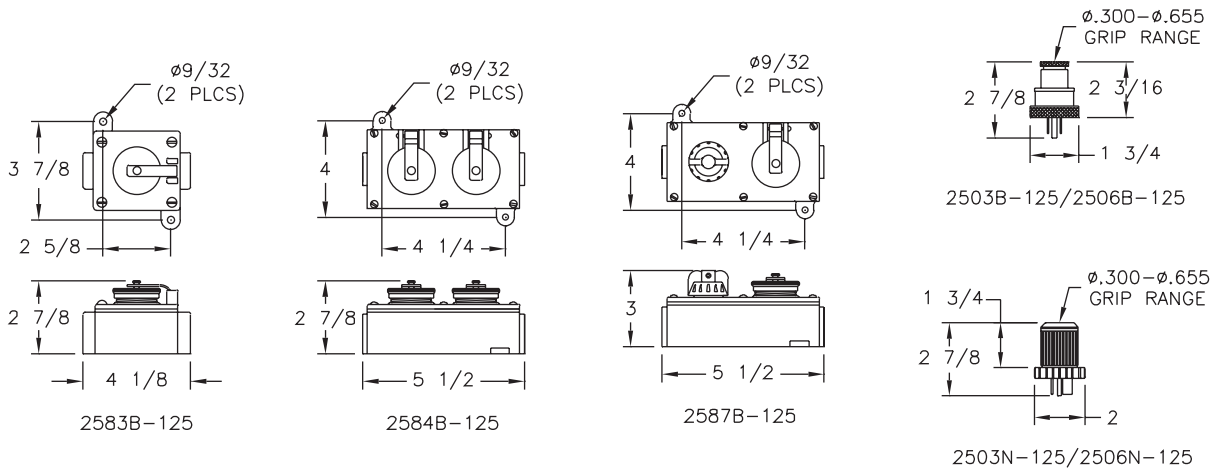

Applications:

- Marine and watertight requirements

Features:

- Water shedding wall mount design
- Watertight straight blade ANSI NEMA type receptacle
- Accepts standard ANSI NEMA type plugs
- Optional two-pole rotary switch combinations
- Available mating metal or nylon plugs with integral threaded ring maintain a watertight seal
- Neoprene gasket resists petroleum
- Cast marine brass or copper-free aluminum construction available
- Captive threaded receptacle cap
- Heavy duty mounting pads
- Silicone lubricant provided for cover screws and flange
- Available in 125 VAC and 250 VAC
- Receptacles will accept 15 or 20 ampere plugs

Certifications and compliances:

- Conforms to IP66
- ABS

Standard materials:

- Plug body – zinc plated brass with PBT enclosure (A series only); brass with PBT enclosure (B series only); nylon (N series only)
- Box and cover – cast marine brass or copper-free aluminum
- Caps and ring – marine brass or zinc plated brass
- Hardware – stainless steel
- Gasket – one-piece neoprene

Technical specifications:

- Entries – standard units undrilled; up to 3/4" NPT through feed available

Voltage and current ratings:

Receptacle


- 15/20 amperes, 125 VAC, ANSI NEMA 5-15/20R
- 15/20 amperes, 250 VAC, ANSI NEMA 6-15/20R

Switch

- 20 amperes, 120/240 VAC
- 1 HP at 120 VAC or 2 HP at 240 VAC

Plug

- 15 amperes, 125 VAC, ANSI NEMA 5-15P
- 20 amperes, 125 VAC, ANSI NEMA 5-20P
- 15 amperes, 250 VAC, ANSI NEMA 6-15P
- 20 amperes, 250 VAC, ANSI NEMA 6-20P

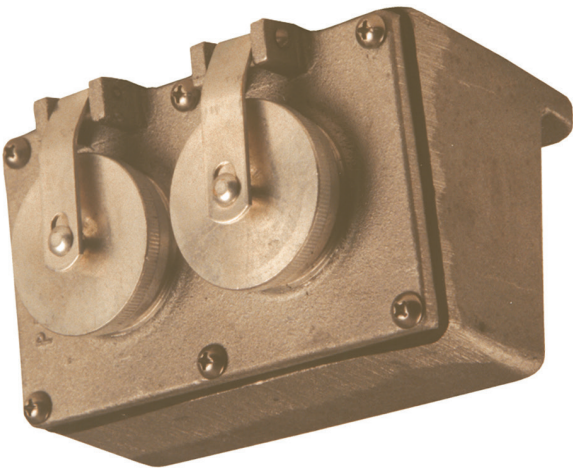

Mounting option:

- Surface mount, via two maximum 1/4" mounting bolts (not included)

Options:

| Description    | Suffix |
|----------------|--------|
| • 250 VAC..... | 250A   |

Entry options:


| NPT trade size | Dead end | Through feed |
|----------------|----------|--------------|
| 1/2"           | E1       | C1           |
| 3/4"           | E2       | C2           |

A Replace '125' in catalog number.


## Ordering information:

| Cat. #    | Description                | Material     | Weight (lbs.) |
|-----------|----------------------------|--------------|---------------|
| 2590B-125 | One receptacle             | Marine brass | 3.0           |
| 2592B-125 | Two receptacles            | Marine brass | 5.0           |
| 2597B-125 | One receptacle with switch | Marine brass | 4.0           |
| 2503B-125 | Plug, 15 amperes           | Marine brass | 0.8           |
| 2506B-125 | Plug, 20 amperes           | Marine brass | 0.8           |
| 2590A-125 | One receptacle             | Aluminum     | 1.0           |
| 2592A-125 | Two receptacles            | Aluminum     | 1.8           |
| 2503A-125 | Plug, 15 amperes           | Aluminum     | 0.8           |
| 2506A-125 | Plug, 20 amperes           | Aluminum     | 0.8           |
| 2503N-125 | Plug, 15 amperes           | Nylon        | 0.5           |
| 2506N-125 | Plug, 20 amperes           | Nylon        | 0.5           |


## Dimensions (in inches):




2590B/A-125

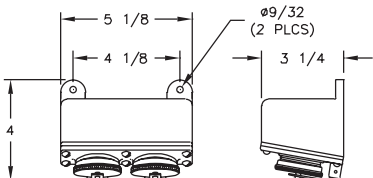


2592B/A-125

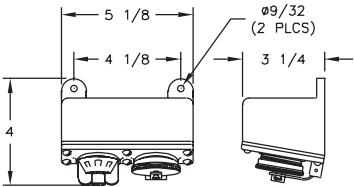

2597B/A-125



2503B/A-125  
2506B/A-125



2503N-125/2506N-125