


**PDG1 Tunnel Terminal (Aluminum) 125 amps,
AWG 14-1/0, 3 poles**
Cat. no. PDG1X3TA125
Style no. 66A3613G21
Quantity - 3

Instructions for assembling collar
to circuit breaker

Assemble collar around
conductor securing with
mounting screw and washer
as shown

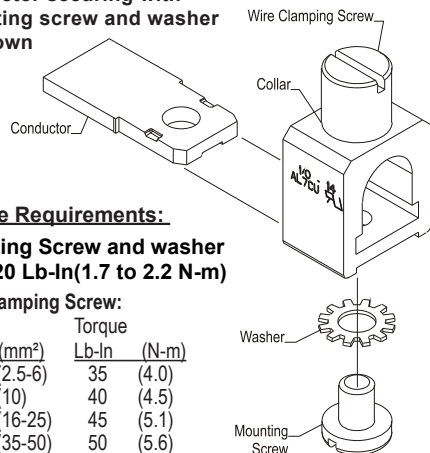


Torque Requirements:

Mounting Screw and washer
15 to 20 Lb-In (1.7 to 2.2 N-m)

Wire Clamping Screw:

Wire		Torque	
AWG	(mm²)	Lb-In	(N-m)
14-10	(2.5-6)	35	(4.0)
8	(10)	40	(4.5)
6-4	(16-25)	45	(5.1)
3-1/0	(35-50)	50	(5.6)




786689164959

**PDG1 Tunnel Terminal (Aluminum) 125 amps,
AWG 14-1/0, 3 poles**
Cat. no. PDG1X3TA125
Style no. 66A3613G21
Quantity - 3

Instructions for assembling collar
to circuit breaker

Assemble collar around
conductor securing with
mounting screw and washer
as shown

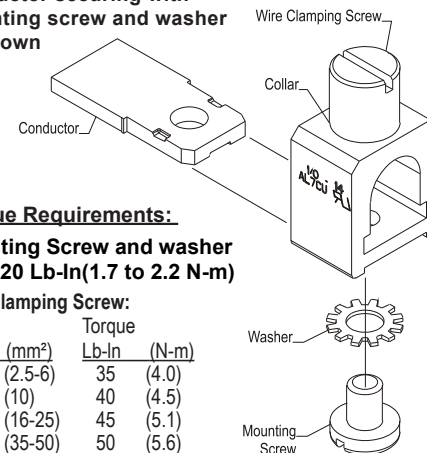

Torque Requirements:

Mounting Screw and washer
15 to 20 Lb-In (1.7 to 2.2 N-m)

Wire Clamping Screw:

Wire		Torque	
AWG	(mm²)	Lb-In	(N-m)
14-10	(2.5-6)	35	(4.0)
8	(10)	40	(4.5)
6-4	(16-25)	45	(5.1)
3-1/0	(35-50)	50	(5.6)




786689164959

**PDG1 Tunnel Terminal (Aluminum) 125 amps,
AWG 14-1/0, 3 poles**
Cat. no. PDG1X3TA125
Style no. 66A3613G21
Quantity - 3

Instructions for assembling collar
to circuit breaker

Assemble collar around
conductor securing with
mounting screw and washer
as shown

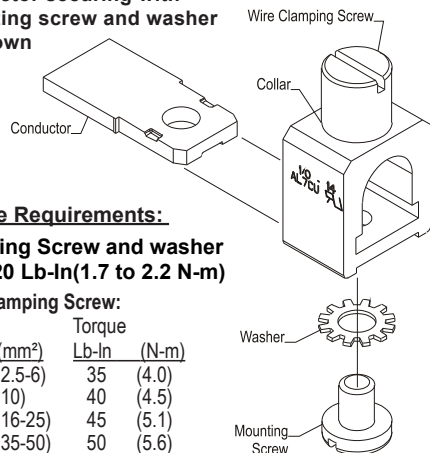


Torque Requirements:

Mounting Screw and washer
15 to 20 Lb-In (1.7 to 2.2 N-m)

Wire Clamping Screw:

Wire		Torque	
AWG	(mm²)	Lb-In	(N-m)
14-10	(2.5-6)	35	(4.0)
8	(10)	40	(4.5)
6-4	(16-25)	45	(5.1)
3-1/0	(35-50)	50	(5.6)




786689164959

**PDG1 Tunnel Terminal (Aluminum) 125 amps,
AWG 14-1/0, 3 poles**
Cat. no. PDG1X3TA125
Style no. 66A3613G21
Quantity - 3

Instructions for assembling collar
to circuit breaker

Assemble collar around
conductor securing with
mounting screw and washer
as shown

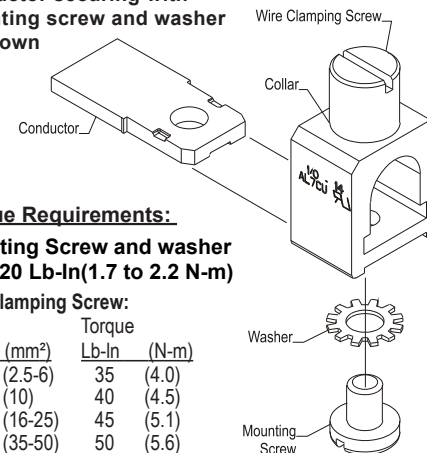

Torque Requirements:

Mounting Screw and washer
15 to 20 Lb-In (1.7 to 2.2 N-m)

Wire Clamping Screw:

Wire		Torque	
AWG	(mm²)	Lb-In	(N-m)
14-10	(2.5-6)	35	(4.0)
8	(10)	40	(4.5)
6-4	(16-25)	45	(5.1)
3-1/0	(35-50)	50	(5.6)



786689164959