




# Hangers

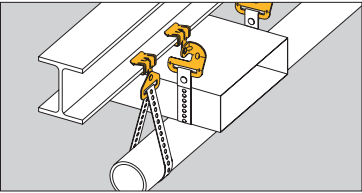

- Suspends straps thru 1½" wide from beam flanges ⅛" to ¾" thick.
- Suspends straps parallel or at right angles to beams.
- Simply installed with a hammer.
- Static Load Capacity: 200 Lbs.


## Strap Hangers



Parallel

Right Angle

| UPC/Part Number | Catalog Number   | Description | Flange Thickness | Box Qty. |
|-----------------|------------------|-------------|------------------|----------|
| 78101104930     | <b>BHE-1-2</b>   | Parallel    | ⅛" to ⅜"         | 100      |
| 78101118870     | <b>BH-2-4</b>    | Parallel    | ⅛" to ¼"         | 100      |
| 78101118880     | <b>BH-5-8</b>    | Parallel    | ⅝" to ½"         | 100      |
| 78101118890     | <b>BH-9-12</b>   | Parallel    | ⅞" to ¾"         | 100      |
| 78101104115     | <b>BH-1-2-R</b>  | Right Angle | ⅛" to ⅜"         | 100      |
| 78101118875     | <b>BH-2-4-R</b>  | Right Angle | ⅛" to ¼"         | 100      |
| 78101118885     | <b>BH-5-8-R</b>  | Right Angle | ⅝" to ½"         | 100      |
| 78101118895     | <b>BH-9-12-R</b> | Right Angle | ⅞" to ¾"         | 100      |

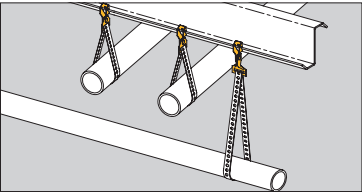


"Z" Purlin Hangers



BH-F12


BH-F12-R



BH-H7

| UPC/Part Number | Catalog Number  | Description | Box Qty. |
|-----------------|-----------------|-------------|----------|
| 78101103385     | <b>BH-F12</b>   | Right Angle | 100      |
| 78101103384     | <b>BH-F12-R</b> | Parallel    | 100      |
| 78101119922     | <b>BH-H7</b>    | Parallel    | 100      |

Read safety/installation instruction sheets in packages before use.

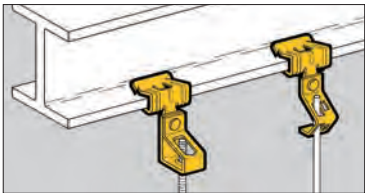

- Suspend wire or plain and threaded rod from beam flanges 1/8" to 3/4" thick.
- Simply installed with a hammer.
- Static Load Capacity: 160 Lbs.

Rod To Beam  
Hangers



| UPC/Part Number | Catalog Number | Flange Thickness | Description               | Box Qty. |
|-----------------|----------------|------------------|---------------------------|----------|
| 78101118900     | BH1-E-2-4      | 1/8" to 1/4"     | #8 Wire or 1/4" Plain Rod | 100      |
| 78101118905     | BH1-E-5-8      | 5/16" - 1/2"     | #8 Wire or 1/4" Plain Rod | 100      |
| 78101118910     | BH1-E-9-12     | 9/16" - 3/4"     | #8 Wire or 1/4" Plain Rod | 100      |

| UPC/Part Number | Catalog Number | Flange Thickness | Plain Rod Size | Box Qty. |
|-----------------|----------------|------------------|----------------|----------|
| 78101118940     | BH2-E-2-4      | 1/8" to 1/4"     | 3/8"           | 100      |
| 78101118945     | BH2-E-5-8      | 5/16" - 1/2"     | 3/8"           | 100      |
| 78101118950     | BH2-E-9-12     | 9/16" - 3/4"     | 3/8"           | 100      |

Read safety/installation instruction sheets in packages before use.

## Rod To Beam Hangers



With thread impression


| UPC/Part Number | Catalog Number    | Flange Thickness | Threaded Rod Size | Box Qty. |
|-----------------|-------------------|------------------|-------------------|----------|
| 78101118980     | <b>BH4-E-2-4</b>  | 1/8" to 1/4"     | 1/4"              | 100      |
| 78101118985     | <b>BH4-E-5-8</b>  | 5/16" - 1/2"     | 1/4"              | 100      |
| 78101118990     | <b>BH4-E-9-12</b> | 9/16" - 3/4"     | 1/4"              | 100      |
| 78101119060     | <b>BH6-E-2-4</b>  | 1/8" to 1/4"     | 3/8"              | 100      |
| 78101119065     | <b>BH6-E-5-8</b>  | 5/16" - 1/2"     | 3/8"              | 100      |
| 78101119070     | <b>BH6-E-9-12</b> | 9/16" - 3/4"     | 3/8"              | 100      |

Note: BH4 and BH6 have thread impressions.

| UPC/Part Number | Catalog Number      | Flange Thickness | Threaded Rod Size | Box Qty. |
|-----------------|---------------------|------------------|-------------------|----------|
| 78101119020     | <b>BH5-E-2-4 *</b>  | 1/8" to 1/4"     | 1/4" to 3/8"      | 100      |
| 78101119025     | <b>BH5-E-5-8 *</b>  | 5/16" - 1/2"     | 1/4" to 3/8"      | 100      |
| 78101119030     | <b>BH5-E-9-12 *</b> | 9/16" - 3/4"     | 1/4" to 3/8"      | 100      |

\*Nuts required.

Read safety/installation instruction sheets in packages before use.

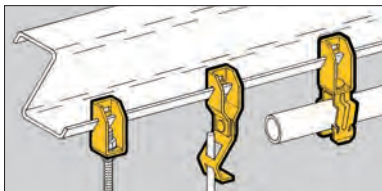

## "Z" Purlin Hangers

- Compensates for angle of purlin lip.
- Allows for parallel conduit runs or vertical support drops.
- Riveted fasteners will rotate 360°.
- Maximum Purlin thickness of 3/32".



BF13



BF12

| UPC/Part Number | Catalog Number | Description    | Static Load Cap. Lbs. | Box Qty. |
|-----------------|----------------|----------------|-----------------------|----------|
| 78101118345     | <b>BF13</b>    | With 1/4" Hole | 100                   | 100      |
| 78101118340     | <b>BF12</b>    | For "S" Hooks  | 100                   | 100      |



## Guide-Rite™ Fastener BG Series



Push-Type  
BP Series

| UPC/Part Number | Catalog Number     | Conduit Size EMT & Rigid    | Static Load Cap. Lbs. | Box Qty. |
|-----------------|--------------------|-----------------------------|-----------------------|----------|
| 78101118445     | <b>BG-6-F13 *</b>  | 3/8"                        | 100                   | 100      |
| 78101118520     | <b>BG-8-12-F13</b> | 1/2", 3/4"                  | 100                   | 100      |
| 78101118590     | <b>BG-16-F13</b>   | 1"                          | 100                   | 100      |
| 78101118675     | <b>BG-20-F13</b>   | 1 1/4"                      | 100                   | 100      |
| 78101119290     | <b>BP-8-F13</b>    | 1/2" EMT                    | 25                    | 100      |
| 78101119390     | <b>BP-12-F13</b>   | 3/4" EMT<br>1/2" IMC, Rigid | 25                    | 100      |
| 78101119480     | <b>BP-16-F13</b>   | 1" EMT<br>3/4" IMC, Rigid   | 25                    | 50       |

\* BG-6 will accept the following range Ø.420 - Ø.675:  
14/2 thru 10/4 MC/AC cable and 5/16" or 3/8" flexible conduit

Read safety/installation instruction sheets in packages before use.

## Universal Beam Fasteners




| UPC/Part Number | Catalog Number | Description               | Static Load Cap. | Box Qty. |
|-----------------|----------------|---------------------------|------------------|----------|
| 78101118920     | <b>BH1-F12</b> | #8 Wire or 1/4" Plain Rod | 100 Lbs.         | 100      |
| 78101118960     | <b>BH2-F12</b> | 3/8" Plain Rod            | 100 Lbs.         | 100      |



| UPC/Part Number | Catalog Number   | Threaded Rod Size | Static Load Cap. | Box Qty. |
|-----------------|------------------|-------------------|------------------|----------|
| 78101119000     | <b>BH4-F12</b>   | 1/4"              | 100 Lbs.         | 100      |
| 78101119080     | <b>BH6-F12</b>   | 3/8"              | 100 Lbs.         | 100      |
| 78101119040     | <b>BH5-F12 *</b> | 1/4" & 3/8"       | 100 Lbs.         | 100      |

\*Nuts required.

Note: BH4 and BH6 have thread impressions.

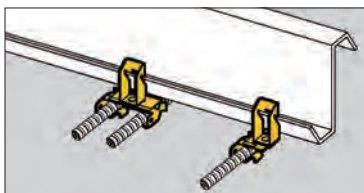

## Cable To "Z" Purlin Flange Hangers



BX4-F13




BX4M-F13

- Compensates for angle of purlin lip.
- Attaches MC, AC, sizes 14/2 through 10/3 or 3/8" FMC to "Z" Purlins up to 3/32" thick.
- Fastener will rotate 360°.
- Simply installed with a hammer.

| UPC/Part Number | Catalog Number  | Description | Flange Thickness | Box Qty. |
|-----------------|-----------------|-------------|------------------|----------|
| 78101101188     | <b>BX4-F13</b>  | Single Runs | Thru 3/32"       | 100      |
| 78101101204     | <b>BX4M-F13</b> | Double Runs | Thru 3/32"       | 100      |

Read safety/installation instruction sheets in packages before use.

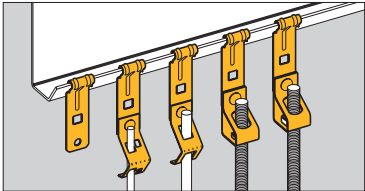

**"Z" Purlin Flange Hangers**

- Suspend wire, or plain and threaded rod from "Z" Purlins.
- Fits "Z" Purlins 1/16" to 1/4" thick.
- Simply installed with a hammer.
- Static Load Capacity: 160 Lbs.



| UPC/Part Number | Catalog Number | Description                                 | Box Qty. |
|-----------------|----------------|---------------------------------------------|----------|
| 78101104271     | BF4            | For "S" Hooks, Bolting Straps and Wrap Wire | 100      |

Read safety/installation instruction sheets in packages before use.

## “Z” Purlin Flange Hangers



| UPC/Part Number | Catalog Number | Description               | Box Qty. |
|-----------------|----------------|---------------------------|----------|
| 78101104274     | <b>BH1-F4</b>  | #8 Wire or 1/4" Plain Rod | 100      |
| 78101104276     | <b>BH2-F4</b>  | 3/8" Plain Rod            | 100      |




| UPC/Part Number | Catalog Number  | Threaded Rod Size | Box Qty. |
|-----------------|-----------------|-------------------|----------|
| 78101104286     | <b>BH4-F4</b>   | 1/4"              | 100      |
| 78101104280     | <b>BH6-F4</b>   | 3/8"              | 100      |
| 78101104278     | <b>BH5-F4 *</b> | 1/4" - 3/8"       | 100      |

\* Nuts required.  
Note: BH4 & BH6 have thread impressions.

Read safety/installation instruction sheets in packages before use.



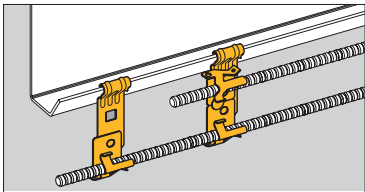

- Attaches MC, AC, sizes 14/2 thru 10/3 or 3/8" FMC to "Z" Purlins.
- Fits "Z" Purlin flanges 1/16" to 1/4" thick.
- Fastener will rotate 360°.

Cable To "Z" Purlin  
Flange Hangers



| UPC/Part Number | Catalog Number | Description | Box Qty. |
|-----------------|----------------|-------------|----------|
| 78101104931     | BX4-F4         | Single Runs | 100      |


These products are designed for positioning only. No load rating.



| UPC/Part Number | Catalog Number | Description | Box Qty. |
|-----------------|----------------|-------------|----------|
| 78101104932     | BX4M-F4        | Double Runs | 100      |

These products are designed for positioning only. No load rating.

Read safety/installation instruction sheets in packages before use.

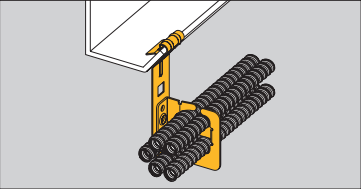


## MC/AC Cable Carrier to 'Z' Purlin Flange Hanger

- Secures and supports multiple runs of MC/AC cable to 'Z' purlins.
- Effectively organizes cables and eliminates derating issues.
- Retention tab is open for easy loading and unloading and contains cables when bent in place.
- Load Capacity: 50 lbs.



| UPC/Part Number | Catalog Number  | Cable Diameter & Number of Runs | Box Qty. |
|-----------------|-----------------|---------------------------------|----------|
| 78205144084     | <b>BRC51-F4</b> | .430" to .560"<br>Up to 4 Runs  | 25       |
| 78205144085     | <b>BRC52-F4</b> | .430" to .560"<br>Up to 9 Runs  | 25       |
| 78205144086     | <b>BRC53-F4</b> | .560" to .690"<br>Up to 7 Runs  | 25       |

Read safety/installation instruction sheets in packages before use.

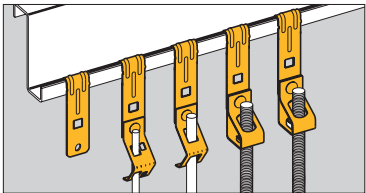

- Suspend wire, or plain and threaded rod from vertical flanges.
- Fits vertical flanges 1/16" to 1/4" thick.
- Static Load Capacity: 160 Lbs.

Vertical Flange Hangers



| UPC/Part Number | Catalog Number | Description                                 | Box Qty. |
|-----------------|----------------|---------------------------------------------|----------|
| 78101104270     | BF3            | For "S" Hooks, Bolting Straps and Wrap Wire | 100      |

Read safety/installation instruction sheets in packages before use.

Vertical Flange  
Hangers



| UPC/Part Number | Catalog Number | Description               | Box Qty. |
|-----------------|----------------|---------------------------|----------|
| 78101104273     | BH1-F3         | #8 Wire or 1/4" Plain Rod | 100      |
| 78101104275     | BH2-F3         | 3/8" Plain Rod            | 100      |




4 1/4"  
Overall Height

| UPC/Part Number | Catalog Number | Threaded Rod Size | Box Qty. |
|-----------------|----------------|-------------------|----------|
| 78101104285     | BH4-F3         | 1/4"              | 100      |
| 78101104279     | BH6-F3         | 3/8"              | 100      |
| 78101104933     | BH5-F3 *       | 1/4", 3/8"        | 100      |

\* Nuts required.

Read safety/installation instruction sheets in packages before use.  
These products are designed for positioning only. No load rating.

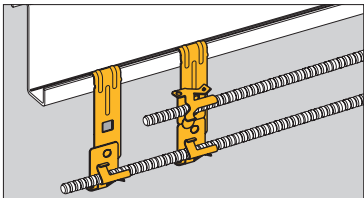

Cable To Vertical  
Flange Hangers

- Attaches MC, AC, sizes 14/2 through 10/3 or 3/8" flexible conduit FMC to vertical flanges 1/16" to 1/4" thick.
- Fastener will rotate 360°.
- Simply installed with a hammer.




| UPC/Part Number | Catalog Number | Description | Box Qty. |
|-----------------|----------------|-------------|----------|
| 78101104281     | BX4-F3         | Single Runs | 100      |



| UPC/Part Number | Catalog Number | Description | Box Qty. |
|-----------------|----------------|-------------|----------|
| 78101104282     | BX4M-F3        | Double Runs | 100      |

Read safety/installation instruction sheets in packages before use.  
These products are designed for positioning only. No load rating.

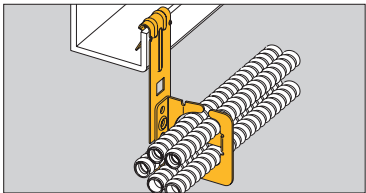


## MC/AC Cable Carrier To Vertical Flange Hanger

- Secures and supports multiple runs of MC/AC cable to vertical flanges.
- Effectively organizes cables and eliminates derating issues.
- Retention tab is open for easy loading and unloading and contains cables when bent in place.
- Load Capacity: 50 lbs.



| UPC/Part Number | Catalog Number  | Cable Diameter & Number of Runs | Box Qty. |
|-----------------|-----------------|---------------------------------|----------|
| 78205144081     | <b>BRC51-F3</b> | .430" to .560"<br>Up to 4 Runs  | 25       |
| 78205144084     | <b>BRC52-F3</b> | .430" to .560"<br>Up to 9 Runs  | 25       |
| 78205144083     | <b>BRC53-F3</b> | .560" to .690"<br>Up to 7 Runs  | 25       |

Read safety/installation instruction sheets in packages before use.

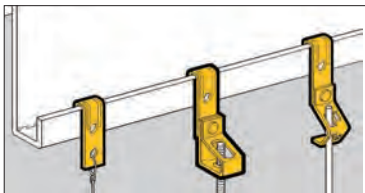

- Suspend wire, or plain or threaded rod from vertical flanges.
- Fits vertical flanges 1/16" to 1/4" thick.
- Static Load Capacity: 160 Lbs.

Vertical Flange Hangers



| UPC/Part Number | Catalog Number | Flange Thickness | Description                                 | Box Qty. |
|-----------------|----------------|------------------|---------------------------------------------|----------|
| 78101118310     | BF1            | 1/16" - 5/32"    | For "S" Hooks, Bolting Straps and Wrap Wire | 100      |
| 78101118315     | BF2            | 5/32" - 1/4"     | For "S" Hooks, Bolting Straps and Wrap Wire | 100      |



| UPC/Part Number | Catalog Number | Flange Thickness | Description               | Box Qty. |
|-----------------|----------------|------------------|---------------------------|----------|
| 78101118915     | BH1-F1         | 1/16" - 5/32"    | #8 Wire or 1/4" Plain Rod | 100      |
| 78101118925     | BH1-F2         | 5/32" - 1/4"     | #8 Wire or 1/4" Plain Rod | 100      |

Read safety/installation instruction sheets in packages before use.

## Vertical Flange Hangers



| UPC/Part Number | Catalog Number | Flange Thickness | Plain Rod Size | Box Qty. |
|-----------------|----------------|------------------|----------------|----------|
| 78101118955     | <b>BH2-F1</b>  | 1/16" - 5/32"    | 3/8"           | 100      |
| 78101118965     | <b>BH2-F2</b>  | 5/32" - 1/4"     | 3/8"           | 100      |



| UPC/Part Number               | Catalog Number | Flange Thickness | Threaded Rod Size | Box Qty. |
|-------------------------------|----------------|------------------|-------------------|----------|
| <b>With Thread Impression</b> |                |                  |                   |          |
| 78101118995                   | <b>BH4-F1</b>  | 1/16" - 5/32"    | 1/4"              | 100      |
| 78101119075                   | <b>BH6-F1</b>  | 1/16" - 5/32"    | 3/8"              | 100      |
| 78101119005                   | <b>BH4-F2</b>  | 5/32" - 1/4"     | 1/4"              | 100      |
| 78101119085                   | <b>BH6-F2</b>  | 5/32" - 1/4"     | 3/8"              | 100      |


### With Clearance Hole

|             |                 |               |            |     |
|-------------|-----------------|---------------|------------|-----|
| 78101118995 | <b>BH5-F1 *</b> | 1/16" - 5/32" | 1/4", 3/8" | 100 |
| 78101119075 | <b>BH5-F2 *</b> | 5/32" - 1/4"  | 1/4", 3/8" | 100 |

\* Nuts required.

Read safety/installation instruction sheets in packages before use.



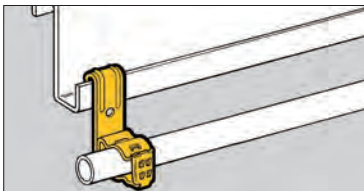

## Conduit To Vertical Flange Hangers

- Supports  $\frac{3}{8}$ " to 1" conduit from vertical flanges  $\frac{1}{16}$ " to  $\frac{1}{4}$ " thick.
- Patented Guide-Rite™ feature ensures fastener will close and lock every time.
- Simply installed with a hammer and pliers.
- Static Load Capacity: 25 Lbs.



**Guide-Rite™**  
Fastener

| UPC/Part Number | Catalog Number    | Conduit Size                      | Flange Thickness                    | Box Qty. |
|-----------------|-------------------|-----------------------------------|-------------------------------------|----------|
| 78101119957     | <b>BG-6-F1 *</b>  | $\frac{3}{8}$ "                   | $\frac{1}{16}$ " - $\frac{5}{32}$ " | 100      |
| 78101119960     | <b>BG-6-F2 *</b>  | $\frac{3}{8}$ "                   | $\frac{5}{32}$ " - $\frac{1}{4}$ "  | 100      |
| 78101119958     | <b>BG-8-12-F1</b> | $\frac{1}{2}$ " & $\frac{3}{8}$ " | $\frac{1}{16}$ " - $\frac{5}{32}$ " | 100      |
| 78101119961     | <b>BG-8-12-F2</b> | $\frac{1}{2}$ " & $\frac{3}{8}$ " | $\frac{5}{32}$ " - $\frac{1}{4}$ "  | 100      |
| 78101119958     | <b>BG-16-F1</b>   | 1"                                | $\frac{1}{16}$ " - $\frac{5}{32}$ " | 100      |
| 78101119961     | <b>BG-16-F2</b>   | 1"                                | $\frac{5}{32}$ " - $\frac{1}{4}$ "  | 100      |

Patent #4958792

\* BG-6 will accept the following range  $\varnothing.420$  -  $\varnothing.675$ :  
14/2 thru 10/4 MC/AC cable and  $\frac{1}{16}$ " or  $\frac{3}{8}$ " flexible conduit




| UPC/Part Number | Catalog Number | Wire Size               | Flange Thickness                    | Box Qty. |
|-----------------|----------------|-------------------------|-------------------------------------|----------|
| 78101103556     | <b>BRC3-F1</b> | 14/2 & 12/2 With Ground | $\frac{1}{16}$ " - $\frac{5}{32}$ " | 100      |
| 78101103557     | <b>BRC3-F2</b> | 14/2 & 12/2 With Ground | $\frac{5}{32}$ " - $\frac{1}{4}$ "  | 100      |

Note: These products are designed for positioning only. No load rating.

Read safety/installation instruction sheets in packages before use.

# Hangers

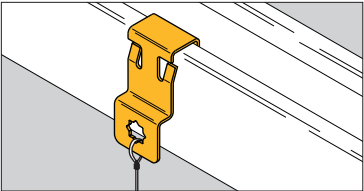

## Strut Fasteners



- The BSC4 Series provides a simple, snap-on attachment to strut, eliminating the need for tools and/or drilling during installation.
- Ideal for retrofit and add-on applications.
- BSC4 provides a 1/4" mounting hole along the side of a standard strut member.
- Riveted assemblies allow for easy attachment of conduit, cable and rod.

| UPC/Part Number | Catalog Number | Description | Load Capacity | Box Qty. |
|-----------------|----------------|-------------|---------------|----------|
| 78205146573     | <b>BSC4</b>    | Strut Clip  | 60 lbs.       | 100      |



| UPC/Part Number | Catalog Number | Rod Size | Load Capacity | Box Qty. |
|-----------------|----------------|----------|---------------|----------|
| 78205146581     | <b>BH4-SC4</b> | 1/4"-20  | 60 lbs.       | 100      |
| 78205146582     | <b>BH6-SC4</b> | 3/8"-16  | 60 lbs.       | 100      |

Read safety/installation instruction sheets in packages before use.



BG\_-SC4



BP\_-SC4



BL14\_-SC4

| UPC/Part Number | Catalog Number    | Conduit Size | Load Capacity | Box Qty. |
|-----------------|-------------------|--------------|---------------|----------|
| 78205146577     | <b>BG6-SC4</b>    | MC/AC & 3/8" | 25 lbs.       | 100      |
| 78205146578     | <b>BG812-SC4</b>  | 1/2" & 3/4"  | 25 lbs.       | 100      |
| 78205146579     | <b>BP8-SC4</b>    | 1/2"         | 15 lbs.       | 100      |
| 78205146580     | <b>BP12-SC4</b>   | 3/4"         | 15 lbs.       | 100      |
| 78205146588     | <b>BL1400-SC4</b> | 1/2"         | 60 lbs.       | 100      |
| 78205146589     | <b>BL1410-SC4</b> | 3/4"         | 60 lbs.       | 100      |
| 78205146590     | <b>BL1420-SC4</b> | 1"           | 60 lbs.       | 100      |



BX4M\_-SC4




BRC5\_-SC4

| UPC/Part Number | Catalog Number   | Cable Size Runs                | Load Capacity | Box Qty. |
|-----------------|------------------|--------------------------------|---------------|----------|
| 78205146584     | <b>BX4M-SC4</b>  | 14/2 - 10/3<br>up to 2 runs    | —             | 100      |
| 78205146585     | <b>BRC51-SC4</b> | .430" to .560"<br>up to 4 runs | 50 lbs.       | 100      |
| 78205146586     | <b>BRC52-SC4</b> | .430" to .560"<br>up to 9 runs | 50 lbs.       | 100      |
| 78205146587     | <b>BRC53-SC4</b> | .560" to .690"<br>up to 7 runs | 50 lbs.       | 100      |

Read safety/installation instruction sheets in packages before use.

# Hangers

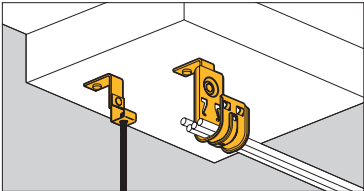

## Drive Pin Fasteners



BPNA

- Special support bracket allows clearance for powder actuated tools.
- Exclusive 1¼" drive pin now pre-installed.
- Pins rated for concrete up to 4000 psi.
- Static Load Capacity: 30 Lbs. unless specified. Limited by fastener assembly. Pin rating must be considered before installation.



BCH21-PNA  
BCH32-PNA



BH-PNA



BH1-PNA  
BH2-PNA

| UPC/Part Number | Catalog Number   | Description             | Box Qty. |
|-----------------|------------------|-------------------------|----------|
| 78205125583     | <b>BPNA</b>      | Angle Bracket           | 100      |
| 78205128090     | <b>BCH12-PNA</b> | ¾" Cable Hook           | 100      |
| 78205125584     | <b>BCH21-PNA</b> | 1½/16" Cable Hook       | 50       |
| 78205125586     | <b>BCH32-PNA</b> | 2" Cable Hook           | 50       |
| 78205125588     | <b>BCH64-PNA</b> | 4" Cable Hook           | 25       |
| 78205125611     | <b>BH-PNA</b>    | Strap Hanger            | 100      |
| 78205125593     | <b>BH1-PNA</b>   | #8 Wire or ¼" Plain Rod | 100      |
| 78205125596     | <b>BH2-PNA</b>   | ¾" Plain Rod            | 100      |

Read safety/installation instruction sheets in packages before use.

## Drive Pin Fasteners



BH\_PNA



BG\_PNA



BP\_PNA



BL14\_PNA



BX4\_PNA



BX4M\_PNA

| UPC/Part Number | Catalog Number     | Description                     | Box Qty. |
|-----------------|--------------------|---------------------------------|----------|
| 78205125604     | <b>BH4-PNA *</b>   | 1/4" Threaded Rod               | 100      |
| 78205125606     | <b>BH6-PNA *</b>   | 3/8" Threaded Rod<br>Cable Hook | 100      |
| 78205125605     | <b>BH5-PNA **</b>  | 1/4" or 3/8"<br>Threaded Rod    | 100      |
| 78205125613     | <b>BG6-PNA ***</b> | 3/8" Conduit                    | 100      |
| 78205125615     | <b>BG8-12-PNA</b>  | 1/2" & 3/4"<br>Conduit          | 100      |
| 78205125616     | <b>BG16-PNA</b>    | 1" Conduit                      | 100      |
| 78205125623     | <b>BP8-PNA</b>     | 1/2" EMT                        | 100      |
| 78205125624     | <b>BP12-PNA</b>    | 3/4" EMT                        | 100      |
| 78205125630     | <b>BP16-PNA</b>    | 1" EMT                          | 100      |
| 78205125620     | <b>BL1400-PNA</b>  | 1/2" Conduit                    | 100      |
| 78205125621     | <b>BL1410-PNA</b>  | 3/4" Conduit                    | 100      |
| 78205125622     | <b>BL1420-PNA</b>  | 1" Conduit                      | 100      |
| 78205125590     | <b>BX4-PNA</b>     | Single Run<br>MC, AC or FMC     | 100      |
| 78205125591     | <b>BX4M-PNA</b>    | Double Run<br>MC, AC or FMC     | 100      |


\* With threaded impressions.    \*\* Nuts required.

\*\*\* BG-6 will accept the following range Ø.420 - Ø.675:

14/2 thru 10/4 MC/AC cable and 5/16" or 3/8" flexible conduit

*Read safety/installation instruction sheets in packages before use.*


## Deck Hanger Bracket

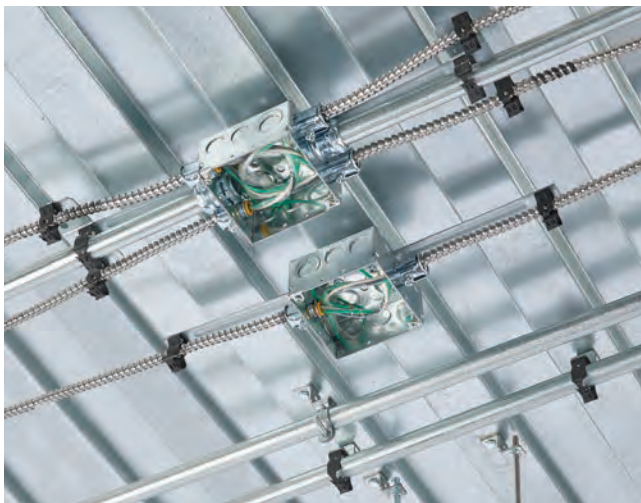


### BDH Series and Riveted Assemblies

- Supports conduit or pipe up to 1½" diameter
- Provides minimum conduit standoff of 1½" to meet the NEC® section 300.4(E)†
- Attach BDH1 thru BDH3 to deck or other structure using ¼" or ⅜" diameter fasteners to hang ¼" or ⅜" ATR (see table for hole sizes of their respective parts)
- For single conduit runs up to 1½" diameter, deck hanger is paired with conduit hanger and Guide-Rite™ fastener
- S18 assembly includes Guide Rite conduit and electrical box support hanger, which helps ensure proper support of boxes and conduit per NEC


**NOTE:** Use appropriate installation hardware (not included) for the specific product application, mounting surface and loads.



**Fig. 1**



**Fig. 2**




**Fig. 3**

#### Material/Finish:

BDH series hangers, BL1400 series conduit hangers & S18 bar are galvanized steel

BG series conduit clips are spring steel/zinc phosphate

All other trademarks are property of their respective owners.

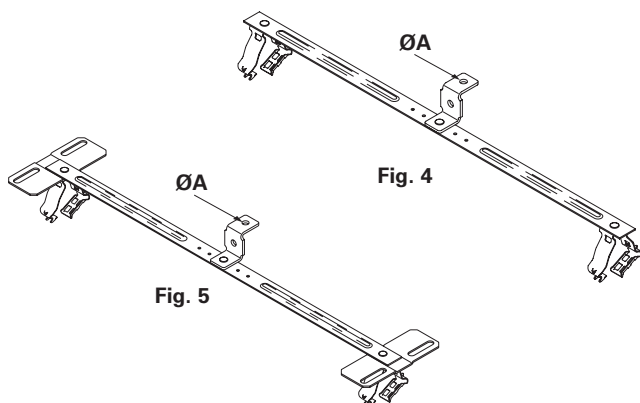
Deck Hanger Bracket *cont'd.*

| Catalog No.             | Fig No. | Hole Ø |      | Conduit Ø              | Static Load* lbs(kg) | Box Qty |
|-------------------------|---------|--------|------|------------------------|----------------------|---------|
|                         |         | A      | B    |                        |                      |         |
| <b>BDH1</b>             | 1       | 1/4"   | 1/4" | —                      | 230 (104)            | 100     |
| <b>BDH2</b>             | 1       | 1/4"   | 3/8" | —                      | 230 (104)            | 100     |
| <b>BDH3</b>             | 1       | 3/8"   | 3/8" | —                      | 250 (113)            | 100     |
| <b>BL1400-DH</b>        | 2       | 1/4"   | —    | 1/2" EMT/RGD           | 100 (45)             | 50      |
| <b>BL1410-DH</b>        | 2       | 1/4"   | —    | 3/4" EMT/RGD           | 100 (45)             | 50      |
| <b>BL1420-DH</b>        | 2       | 1/4"   | —    | 1" EMT/RGD             | 100 (45)             | 50      |
| <b>BL1425-DH</b>        | 2       | 1/4"   | —    | 1 1/4" EMT             | 100 (45)             | 50      |
| <b>BL1430-DH</b>        | 2       | 1/4"   | —    | 1 1/2" EMT, 1 1/4" RGD | 100 (45)             | 50      |
| <b>BG6-DH</b>           | 3       | 1/4"   | —    | 3/8" EMT/RGD**         | 25 (11)              | 50      |
| <b>BG812-DH</b>         | 3       | 1/4"   | —    | 1/2" - 3/4" EMT/RGD    | 50 (23)              | 50      |
| <b>BG16-DH</b>          | 3       | 1/4"   | —    | 1" EMT/RGD             | 60 (27)              | 50      |
| <b>BG20-DH</b>          | 3       | 1/4"   | —    | 1 1/4" EMT/RGD         | 75 (34)              | 50      |
| <b>BG24-DH</b>          | 3       | 1/4"   | —    | 1 1/2" EMT/RGD         | 80 (36)              | 50      |
| <b>BG6-S18-DH</b>       | 4       | 1/4"   | —    | 3/8" EMT/RGD**         | 25 (10)              | 25      |
| <b>BG812-S18-DH</b>     | 4       | 1/4"   | —    | 1/2" - 3/4" EMT/RGD    | 25 (10)              | 25      |
| <b>BG16-S18-DH</b>      | 4       | 1/4"   | —    | 1" EMT/RGD             | 25 (10)              | 25      |
| <b>BG6-S18-DH-MC3</b>   | 5       | 1/4"   | —    | 3/8" EMT/RGD**         | 25 (10)              | 25      |
| <b>BG812-S18-DH-MC3</b> | 5       | 1/4"   | —    | 1/2" - 3/4" EMT/RGD    | 25 (10)              | 25      |
| <b>BG16-S18-DH-MC3</b>  | 5       | 1/4"   | —    | 1" EMT/RGD             | 25 (10)              | 25      |

\*Static load limits are for deck hanger brackets only; use appropriate mounting hardware.

\*\*Accepts .420 - .675 diameter; 14/2 thru 10/4 MC/AC cable and 5/16" or 3/8" flexible conduit.

† NEC® Section 300.4(E) states that cables and raceways must be installed at least 1 1/2" (38 mm) under the roof decking to prevent potential damage from nails or screws.

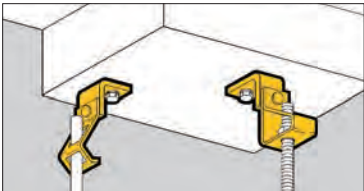

## Angle Bracket Fasteners

- Suspend plain or threaded rod and drop wire from ceilings, walls, concrete beams, joists and laminated wood beams.
- Clearance hole for 1/4" bolt provided.
- Static Load Capacity: 160 Lbs.



| UPC/Part Number | Catalog Number | Description               | Box Qty. |
|-----------------|----------------|---------------------------|----------|
| 78101118930     | <b>BH1-H7</b>  | #8 Wire or 1/4" Plain Rod | 100      |
| 78101118975     | <b>BH2-H7</b>  | For 3/8" Plain Rod        | 100      |




| UPC/Part Number | Catalog Number  | Threaded Rod Size  | Box Qty. |
|-----------------|-----------------|--------------------|----------|
| 78101119010     | <b>BH4-H7</b>   | 1/4"-20            | 100      |
| 78101119090     | <b>BH6-H7</b>   | 3/8"-16            | 100      |
| 78101119050     | <b>BH5-H7 *</b> | 1/4"-20 or 3/8"-16 | 100      |

\* Nuts required.  
Note: BH4 & BH6 have thread impressions.

Read safety/installation instruction sheets in packages before use.



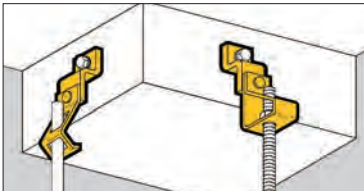

- Suspend plain or threaded rod and drop wire from ceilings, walls, beams, and joists.
- Clearance hole for 1/4" bolt provided.
- Static Load Capacity: 160 Lbs.

Offset Bracket  
Fasteners



| UPC/Part Number | Catalog Number | Description               | Box Qty. |
|-----------------|----------------|---------------------------|----------|
| 78101118935     | BH1-H8         | #8 Wire or 1/4" Plain Rod | 100      |
| 78101118975     | BH2-H8         | 3/8" Plain Rod            | 100      |



| UPC/Part Number | Catalog Number | Threaded Rod Size  | Box Qty. |
|-----------------|----------------|--------------------|----------|
| 78101119015     | BH4-H8         | 1/4"-20            | 100      |
| 78101119095     | BH6-H8         | 3/8"-16            | 100      |
| 78101119055     | BH5-H8 *       | 1/4"-20 or 3/8"-16 | 100      |

\* Nuts required.

Note: BH4 & BH6 have thread impressions.


Read safety/installation instruction sheets in packages before use.

# Hangers




- Suspend 3/8" threaded rod from ceilings, walls, beams, and joists.
- Finish: Zinc Plated.
- Static Load Capacity: 610 Lbs.

## Threaded Rod Hangers



| UPC/Part Number | Catalog Number   | Description       | Box Qty. |
|-----------------|------------------|-------------------|----------|
| 78101101661     | <b>B3223-3/8</b> | Offset Eye Socket | 100      |

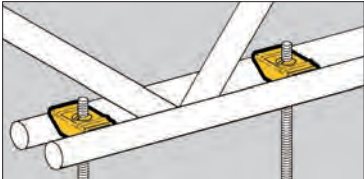

- Allows centering on all open web joists with round bottom chords.
- Static Load Capacity:  
BH11 = 200 Lbs.  
BH12 = 100 Lbs.

## Wedge Hangers





BH11

BH12

| UPC/Part Number | Catalog Number | Description                    | Box Qty. |
|-----------------|----------------|--------------------------------|----------|
| 78101118860     | <b>BH11</b>    | With 3/8" Clearance Hole       | 100      |
| 78101118865     | <b>BH12</b>    | With 1/4"-20 Thread Impression | 100      |

Read safety/installation instruction sheets in packages before use.



- Brackets are easily attached with screws or drive pins to wood, concrete or steel structures.
- Brackets are adaptable for use with a wide variety of fasteners, wires, "S" hooks and hangers.



BD2



BD4



BA28B

| UPC/Part Number | Catalog Number | Description    | Box Qty. |
|-----------------|----------------|----------------|----------|
| 78101101686     | <b>BD2</b>     | Flat Bracket   | 100      |
| 78101118280     | <b>BD4</b>     | Offset Bracket | 100      |
| 78101101449     | <b>BA28B</b>   | Angle Bracket  | 100      |

Read safety/installation instruction sheets in packages before use.

# Hangers




- BH1, BH2: Supports wire or plain rod.
- BH7, BH8: For wire or chain drop from concrete or wood.
- BH4, BH5, BH6 supports 1/4" or 3/8" threaded rod.
- Static Load Capacity: 160 Lbs.

## Components



| UPC/Part Number | Catalog Number | Description               | Box Qty. |
|-----------------|----------------|---------------------------|----------|
| 78101118800     | <b>BH1</b>     | #8 Wire or 1/4" Plain Rod | 100      |
| 78101118805     | <b>BH2</b>     | For 3/8" Plain Rod        | 100      |



| UPC/Part Number | Catalog Number | Description                  | Box Qty. |
|-----------------|----------------|------------------------------|----------|
| 78101118815     | <b>BH4</b>     | For 1/4" Threaded Rod        | 100      |
| 78101118825     | <b>BH6</b>     | For 3/8" Threaded Rod        | 100      |
| 78101118820     | <b>BH5 *</b>   | For 1/4" & 3/8" Threaded Rod | 100      |

\* Nuts required.  
Note: BH4 & BH6 have thread impressions.



| UPC/Part Number | Catalog Number | Description                               | Box Qty. |
|-----------------|----------------|-------------------------------------------|----------|
| 78101118830     | <b>BH7</b>     | Angle Bracket With .281"Ø Holes           | 100      |
| 78101118835     | <b>BH7-6</b>   | Angle Bracket With .281"Ø & .406"Ø Holes  | 100      |
| 78101118840     | <b>BH8</b>     | Offset Bracket With .281"Ø Holes          | 100      |
| 78101118845     | <b>BH8-6</b>   | Offset Bracket With .281"Ø & .406"Ø Holes | 100      |

Read safety/installation instruction sheets in packages before use.