


## XP500 industrial PC

Control solution with capacitive multi-touch technology

Eaton.com/xp500

# For those who stay at the forefront of technology

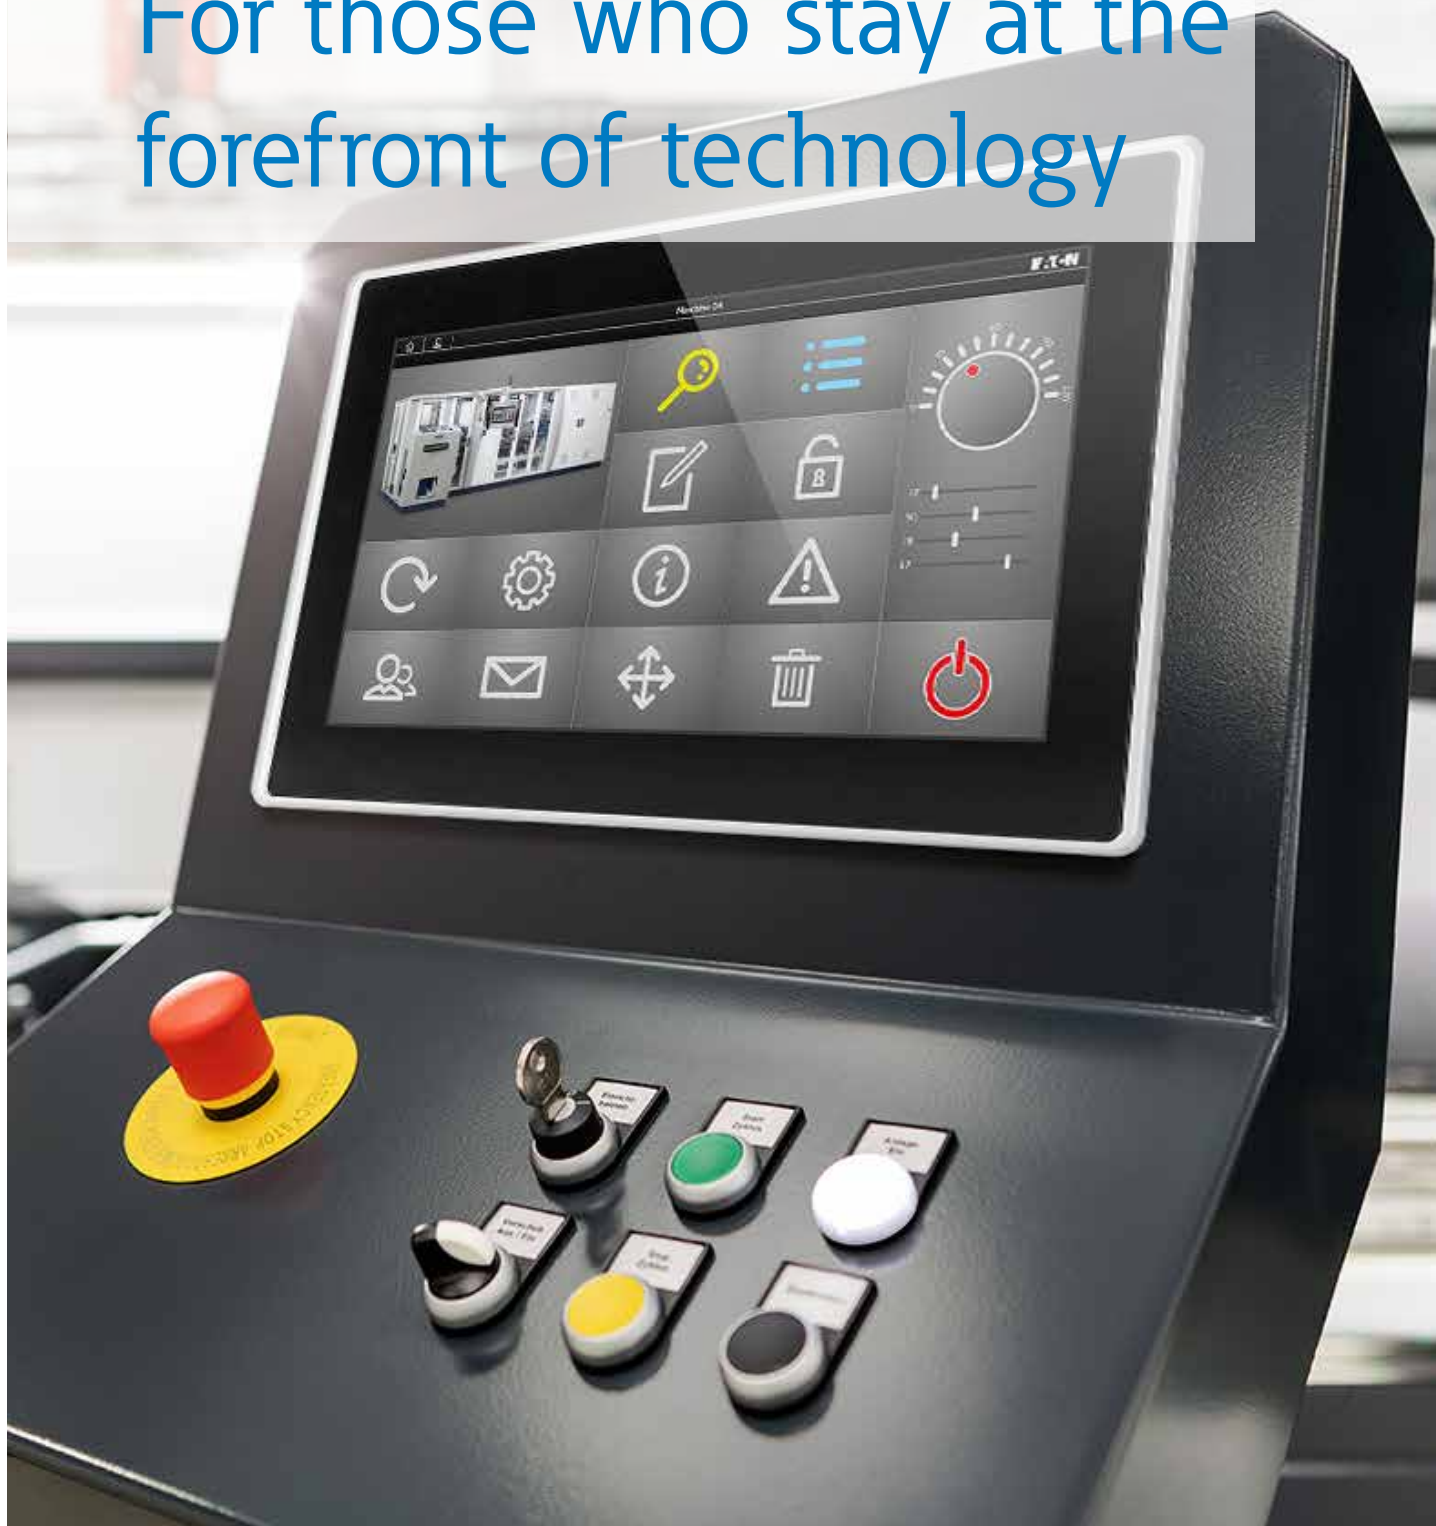

# EATON

*Powering Business Worldwide*

# XP500 - designed for simple and flexible operation

Use multiple fingers to zoom, scroll and swipe: Intuitive multi-touch operating concepts have long been the norm for smartphones and tablets, but are now also available to the industrial world. With the XP500 industrial PC, users can operate the functions keys on the screen either using several fingers or both hands. Operators can also scroll and zoom with

two fingers to navigate around the elements or documents in the help system. High-precision sensors prevent operating errors and accidental machine starts. Critical functions can only be activated by pressing multiple control fields at once, which ensures significantly greater system safety.



## Eaton makes everything easier

### Easy to maintain: hygienic design

The smooth, anti-glare display is made from tempered safety glass and has a special easy-care design without any gaps or edges, which means no residues will be left behind after cleaning, even when using strong cleaning agents.

### Easy to protect: protect mode

The XP500 devices run on the Windows 10 Enterprise LTSC operating system and feature a special protection mode that secures the system against unauthorized access or changes and increases reliability. The boot time is also minimized.

### Easy to choose: bundles with Eaton HMI software


**XP500 – GALILEO Open Bundle:**  
Devices in the GALILEO Open Bundle come with the GALILEO Open Runtime license as standard and free of charge.

**XP500 – with SCADA software packages:**  
The powerful hardware means that SCADA software packages such as Visual Designer Runtime can also be installed on the devices.

# Welcome to a new era of process visualization

The powerful industrial PCs in the XP500 series provide a high-end HMI solution. The XP500 series is characterized by modularity, durability and intuitive operation - all packed into a high-quality, sleek design. The product range centers around the capacitive multi-touch devices, which offer widescreen displays measuring 10.1, 15.6 and 21.5 inches. These devices enable precise, multi-finger operation of the user interface.

XP500 devices run on the Windows 10 operating system in order to make integration into existing production networks and administration as straightforward as possible. The inclusion of Eaton's Cybersecurity Guideline provides an excellent starting level of protection against unauthorized access to the hardware and software. This protection can subsequently be extended and adapted to suit local requirements by the system administrator.

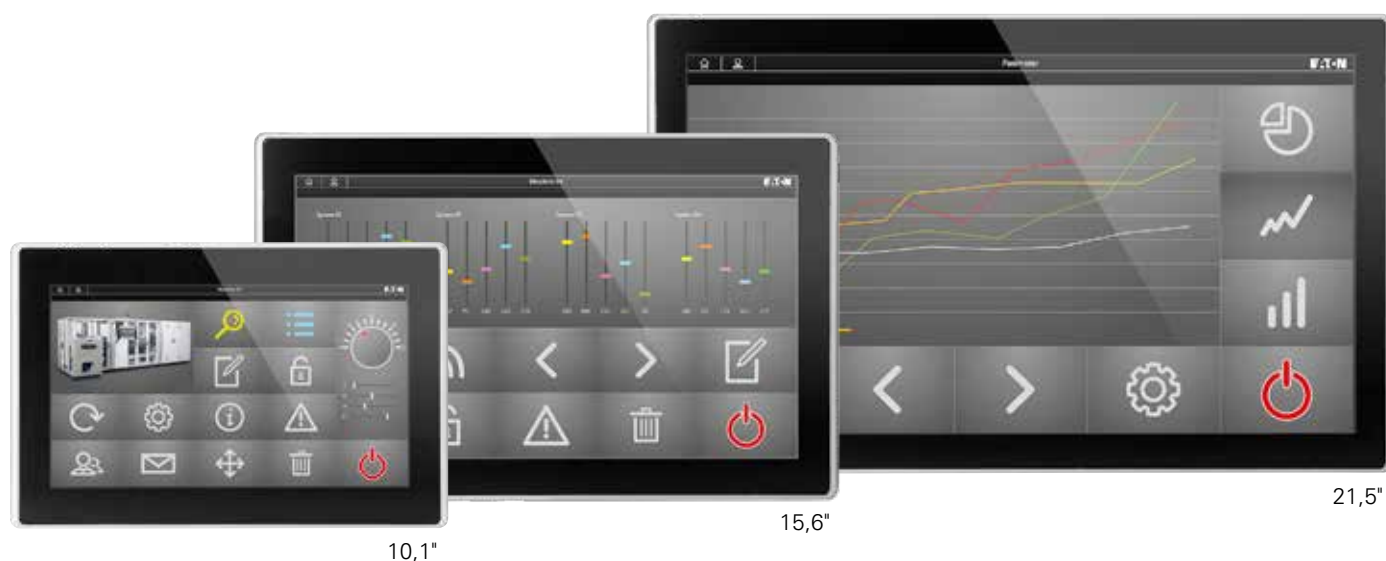

## The perfect all-rounder for all industrial applications

The compact and fanless design of the XP500 devices means that they take up very little space. The modularity of the system, easy operation and rugged construction of the devices open up a wide range of applications in the machine and system building, as well as in building automation.



### Machine and system building

XP500 devices are designed for harsh industrial use. The devices are easy to integrate thanks to complete PC openness, high levels of security and the flexibility with which the Windows 10 Enterprise LTSC operating system can be configured. Two on-board, independent Ethernet interfaces ensure integrated networking.



### Building management

A broad range of applications for XP500 devices can also be found in the building management sector. The devices can be integrated into building management systems and used to manage premises or monitor and remotely control security-relevant systems, such as HVAC control units.



### Hazardous applications

The front of the device has IP65 degree of protection and the panel PCs are certified to UL Class I Division 2. This means that XP500 devices are suitable for use in harsh industrial environments as well as in hazardous applications in the process industry.

# XP500 - flexible use in application

As well as standard applications, the XP-504 devices offer the opportunity to „grow“ with modular systems for the first time. A multi-part modular system forms the basis for implementing various applications and expanding systems.


The visualization is particularly ideal for configuring expandable systems in a future-proof and flexible manner.

“Thanks to the XP-504 system, I can now control my packaging machines over long distances with minimal effort. I use the panel PC in combination with the extender module. On the packaging lines themselves, two terminals help me to keep track of the situation across the entire plant.”



## Dual Display

The application can be extended to the second screen using the terminal. This would make it possible to implement an application that combines multiple operating and monitoring levels, such as a camera feed and the control system. The video feed can then be shown in full screen mode on one display, while the actual system control is running on the panel PC.

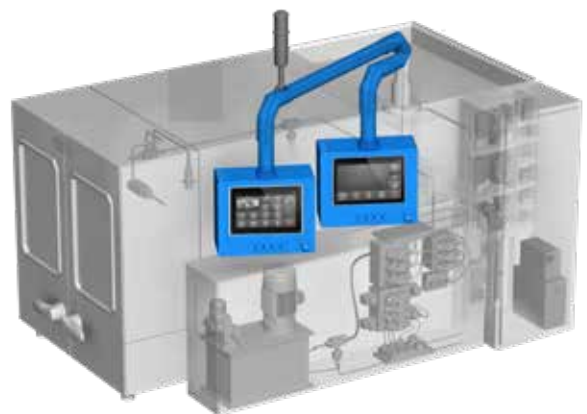

Panel PC

up to 1.8 m



Terminal






## Extended display


The panel PC features a graphics output and several USB interfaces. These interfaces allow the display of the panel PC to be extended or mirrored. This means the application on the panel PC can be displayed on a second screen with touch functionality—the terminal.

A good example would be an application spanning multiple floors, for which the operator needs access to the system control on several levels, allowing them to reduce travel distances.

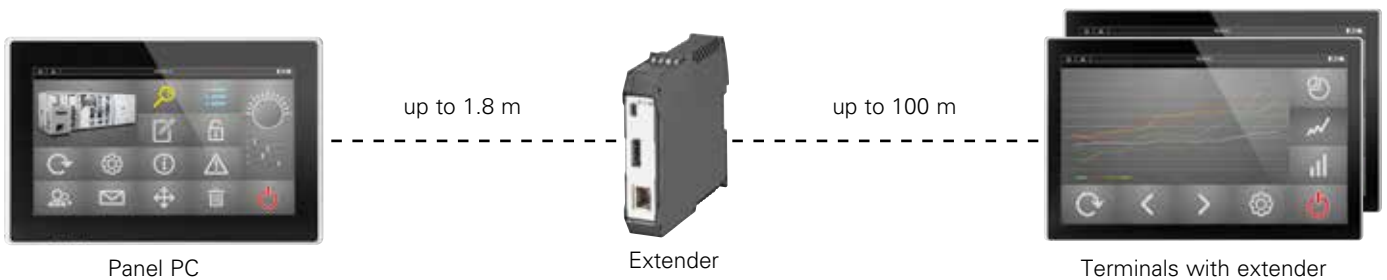

## Box PC with extended display

The processing unit - the box PC - can be used by itself or in tandem with the terminal. If used as an independent box PC, the PC can be installed in a decentralized location subject to environmental conditions, if this is required by the environmental conditions. Using an extender, the box PC can then be connected to a terminal with an integrated extender counterpart. This connection enables control and visualization across the entirety of large systems.

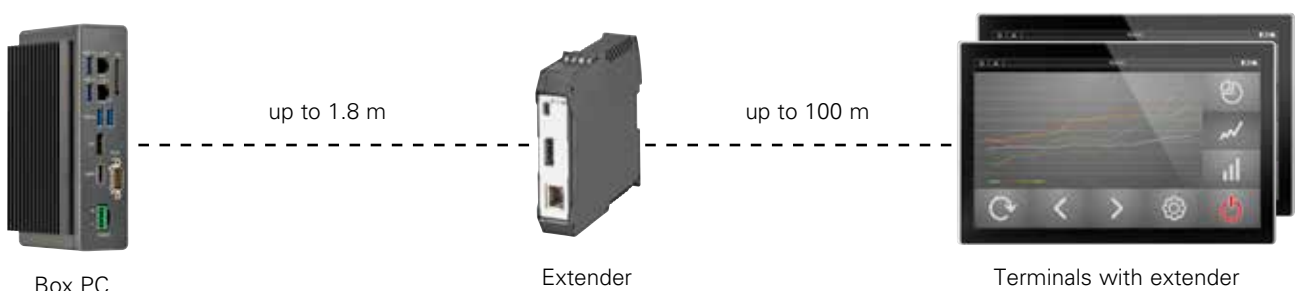

# XP500 - your connection to the future

## Panel PC

The panel PCs in the XP500 series impress with an exceptional degree of openness and outstanding performance parameters. The devices run on the Windows 10 Enterprise LTSC operating system. This means they are compatible with a wide range of application software and can also be perfectly combined with Eaton's visualization software. With IP65 degree of protection on the front, the devices are suitable for use in ambient temperatures from ranging 0 °C to +45 °C.

The efficient panel PCs feature an Intel Atom E3950 Quad Core CPU and ensure a high processing capacity as well as high-performance graphics. In addition to the two Ethernet and four USB interfaces, the devices are equipped with a configurable RS232/RS422/RS485 interface. Furthermore, an SD card can be used for operation or data storage in addition to the internal mass storage of 64 GB.



## Box PC

The PC and terminal can be used as separate units, which is ideal for users looking for a more flexible way to incorporate the XP500 industrial PC into their machine, plant or building. The box PC is placed in the control panel and exchanges data with one or more terminals. The box PC has the same interfaces as the panel PC and offers a slim PC solution for the control panel thanks to its compact design.



## Extender

The extender unit allows full HD video and USB data to be transferred over a distance of up to 100 meters, making it a reliable transmission option for modular machines, plants and building applications in particular. The extender can be easily mounted on the DIN rail. As well as an RJ45 connector, the device is equipped with a USB 2.0 port and a DisplayPort connection. Its suitability for use in ambient temperatures ranging from -20 °C to +50 °C demonstrates that the extender module is particularly resilient.



## Terminals with/without extender on-board

The robust terminals measuring 10.1, 15.6 and 21.5 inches open up a wide range of options for distributing the XP500 system around your plant. The PC-based touch monitors can be used purely as visualization devices for display and direct input or alternatively they can be used with an extender on-board for transmission distances of up to 100 meters. The devices each have a DVI-I, DP (DisplayPort) and USB-B port.

# XP500 - the modular system for maximum flexibility



## Ordering information

Description	Type	Article no.
10.1-inch panel PC, Galileo Runtime	XP-504-10-A10-A01-2B	199996
15.6-inch panel PC, Galileo Runtime	XP-504-15-A10-A01-2B	199998
21.5-inch panel PC, Galileo Runtime	XP-504-21-A10-A01-2B	360002
Box PC, Galileo Runtime	XP-504-BPC-A10-A01-2B	400011
10.1-inch terminal, Galileo Runtime	XP-504-10-TERMINAL	400137
15.6-inch terminal, Galileo Runtime	XP-504-15-TERMINAL	400138
21.5-inch terminal, Galileo Runtime	XP-504-21-TERMINAL	400139
10.1-inch terminal with extender, Galileo Runtime	XP-504-10-TERMINAL-EXT	400140
15.6-inch terminal with extender, Galileo Runtime	XP-504-15-TERMINAL-EXT	400141
21.5-inch terminal with extender, Galileo Runtime	XP-504-21-TERMINAL-EXT	400142
Range extender TX	XP-504-EXT-TX	400013

All versions are also available with Visual Designer.

Eaton is dedicated to ensuring that reliable, efficient and safe power is available when it is needed most. With unparalleled knowledge of electrical power management across different industries, experts at Eaton deliver customized, integrated solutions to solve our customers' most critical challenges.

Our focus is on finding the right solution for every application. But decision makers demand more than just innovative products. They turn to Eaton for an unwavering commitment to personal support that makes customer success a top priority.

For more information, please visit **Eaton.com**

Eaton contacts worldwide: **Eaton.com/contacts**

The products, information and prices contained in this document are subject to change. We also reserve the right to correct any errors or omissions. Only the order confirmation and the technical documentation provided by Eaton are binding. Images and illustrations are indicative only and do not guarantee any particular design or functionality. Their use in any form must be approved in advance by Eaton. The same applies to trademarks (especially to Eaton, Moeller, Cutler-Hammer, Cooper and Bussmann). Eaton's terms of sale, as published on Eaton's websites and included with order confirmations received from Eaton, apply.

**Eaton Industries GmbH**  
Hein-Moeller-Str. 7-11  
53115 Bonn, Germany

© 2013 by Eaton Corporation  
All rights reserved.  
Publication no.: BR050001EN  
December 2021

Eaton is a registered trademark of Eaton Corporation.

All other trademarks are property of their respective owners.