

# Leviton Plug-On Surge Protective Device and Circuit Breaker





Leviton's new plug-on surge protective device is designed for easy in-panel installation and provides effective surge protection for the entire home.

Now required in the 2020 NEC®, panel-level surge protection is key for critical circuits that power equipment in residential applications. Featuring (2) 1-pole circuit breakers with separate operating handles, there's no loss of space inside the panel. Line-side power ensures surge protection continues, even after a breaker is OFF or tripped.

An easy-to read LED indicator light displays power and protection status and also remains lit, even after a breaker is tripped.

- All plug-on Installation: installs just like a circuit breaker
- Protects from surge events
- Line-side powered LED lights


## Specifications for 15 and 20 Amp Surge Breakers


Part Number	LSPD1 (hydraulic magnetic) and LSPD1-T (thermal magnetic)	LSPD2 (hydraulic magnetic) and LSPD2-T (thermal magnetic)			
Certifications	UL 489, UL 1449, and CSA C22.2 No.269.1				
SPD Type	Type 1				
Maximum Surge Current	25kA (Per Mode)				
System Voltage	120/240V				
Amp Rating	15 Amp	20 Amp			
Short Circuit Rating	10kA				
Frequency	50/60HZ				
Maximum Continuous	L-N = 150V				
Operating Voltage (MCOV)	L-L = 300V				
Voltage Protection Rating (VPR)	600V L-N and 1200V L-L				
Connection Method	All Plug-ON				
Surge Protection Diagnostics	= Protected				
Cango i recession Biagnostics	Red LED = NOT Protected, Replace OFF = No Power				

# Handle operation and LED diagnostics - note each pole is independent


Handl	e Window	LEDs		0, 1,0 1, (200.0)	
Left Pole	Right Pole	Left Pole	Right Pole	Circuit Breaker / SPD Status	
Green	Green	ON - Green	ON - Green	ON / Protected	
Red	Red	ON - Green	ON - Green	en Overload or Short Circuit Trip / Protected	
Red	Red	ON - Red	ON - Red	Overload or Short Circuit Trip / NOT Protected	
White	White	OFF	OFF	Manual OFF / No Power	

### **DIMENSIONS FOR A 15A AND 20A SPD BREAKER**







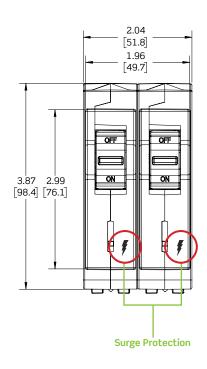

Catalog	No. Pole	Max Amp Rating	Voltage
LSPD1	2	15A	120V/240V
LSPD2	2	20A	120V/240V
LSPD1-T	2	15A	120V/240V
LSPD2-T	2	20A	120V/240V



**Leviton Manufacturing Co., Inc.** 201 North Service Road, Melville, NY 11747-3138 Telephone: 1-800-323-8920 • FAX: 1-800-832-9538 Tech Line: 1-800-824-3005

Mon-Fri 8am-10pm EST, Saturday 9am-7pm EST