



WMC : LED WALLPACK CUBE

DESCRIPTION

- Economical and energy efficient LED solution for general purpose wall mount lighting
- Integrated dusk-to-dawn button type photocontrol

LISTINGS

- UL Listed for wet locations
- IP65 Rated
- DesignLights Consortium® Qualified - meets DLC requirements for efficacy and lumen maintenance

LED CHARACTERISTICS

- Rated lifetime L70: 50,000 hours
- 4000K/5000K CCT
- CRI: 80+

ELECTRICAL

- Input voltage: 120-277V
- Power Factor: >.90
- THD: <20%

CONSTRUCTION

- Durable die cast aluminum housing with polycarbonate impact-resistant lens
- Fully sealed and gasketed, wet location rated
- Enclosure and hardware are corrosion resistant
- -40°F to 104°F (-40°C to 40°C) operating temperature

WARRANTY

- 5 year limited warranty; see eiko.com for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



APPLICATIONS

- Residential Exteriors
- Entrances
- Storage Facilities
- Convenience Stores
- Recreational Areas
- Housing Complexes
- Security



ORDERING INFORMATION


EXAMPLE: WMC-2C-50K-U

Model	Package	CCT	Voltage
WMC : LED Wallpack Cube	2C - 20W; 1,900 lm 3C - 30W; 2,800 lm	40K - 4000K 50K - 5000K	U - 120-277V

PERFORMANCE SUMMARY

Order Code	Item #	Watts	Lumens	CCT	CRI	Volts	HID Equiv.	DLC
09810	WMC-2C-40K-U	20W	1,900	4000K	80+	120-277V	150W	✓
09580	WMC-2C-50K-U	20W	1,900	5000K	80+	120-277V	150W	✓
09811	WMC-3C-40K-U	30W	2,850	4000K	80+	120-277V	150W	✓
09581	WMC-3C-50K-U	30W	2,800	5000K	80+	120-277V	150W	✓

DIMENSIONS

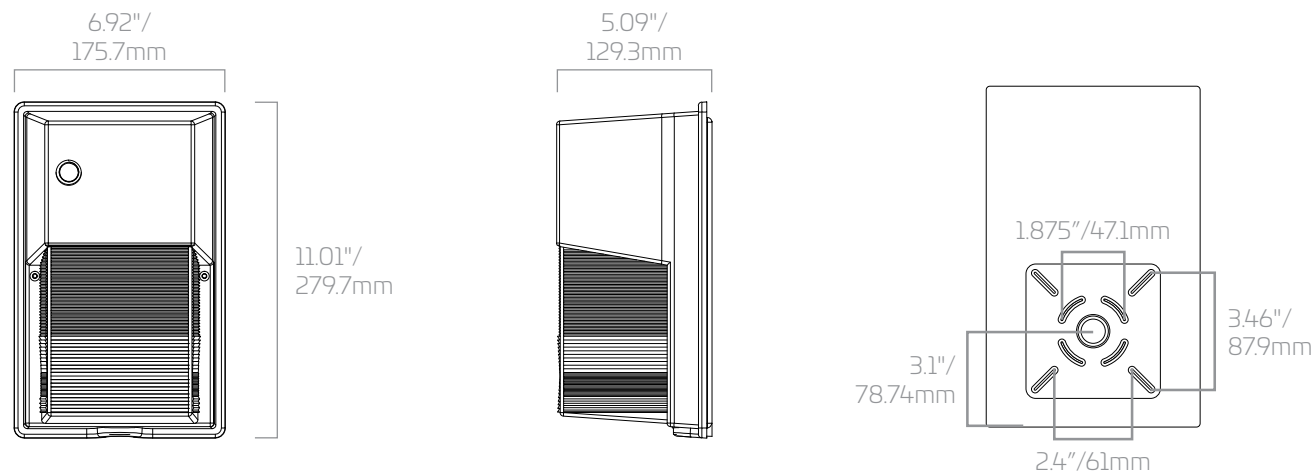

ACCESSORIES

Order Code	Item #	Description
09966	PC1-4036-U	Photocell, Flush Mount, 120-277V (for replacement of integrated photocell)