


# Hose and Cable Protection Systems


## ProTrak™ Systems

For Pedestrian and Light Vehicle Traffic

- High density polyurethane construction supports heavy loads and is weather resistant
- Modular interlocking design for easy installation, breakdown and storage
- Safety surface pattern reduces slipping and skidding
- High visibility safety yellow and black
- Anti-slip pad kits available

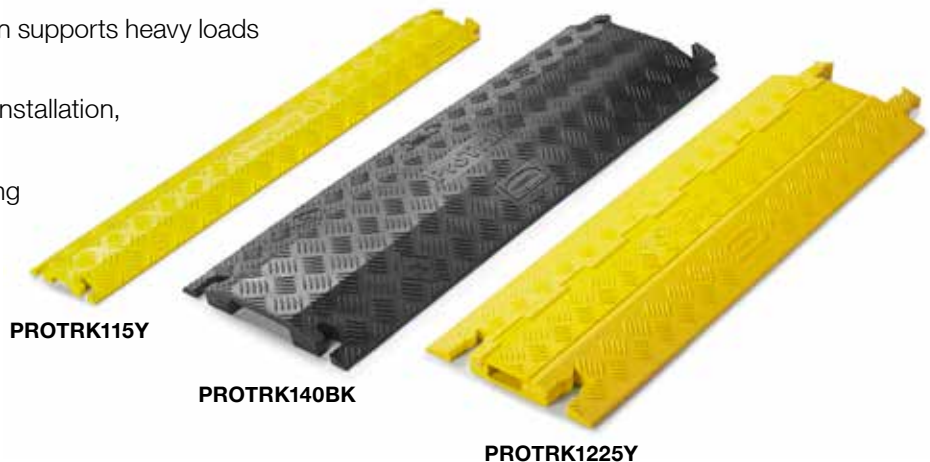

| ProTrak™ Systems                | A                  | B                 | C                  | D                 | E                  |                     |                |
|---------------------------------|--------------------|-------------------|--------------------|-------------------|--------------------|---------------------|----------------|
|                                 | Trak               |                   |                    | Channel           |                    |                     |                |
| Description                     | Length<br>in. (mm) | Width<br>in. (mm) | Height<br>in. (mm) | Width<br>in. (mm) | Height<br>in. (mm) | Weight<br>lbs. (kg) | Catalog Number |
| 1 Channel, drop over, yellow    | 36.0" (914)        | 5.25" (133)       | .75" (19.0)        | 1.50" (38.1)      | .50" (12.7)        | 3.00 (1.40)         | PROTRK115Y     |
| 1 Channel, drop over, black     | 36.0" (914)        | 5.25" (133)       | .75" (19.0)        | 1.50" (38.1)      | .50" (12.7)        | 3.00 (1.40)         | PROTRK115BK    |
| 1 Channel, drop over, yellow    | 36.0" (914)        | 10.75" (273)      | 1.50" (38.1)       | 4.00" (101.6)     | 1.00" (25.4)       | 8.00 (3.60)         | PROTRK140Y     |
| 1 Channel, drop over, black     | 36.0" (914)        | 10.75" (273)      | 1.50" (38.1)       | 4.00" (101.6)     | 1.00" (25.4)       | 8.00 (3.60)         | PROTRK140BK    |
| 1 Channel, hinged cover, yellow | 36.0" (914)        | 10.81" (274)      | 1.25" (31.8)       | 2.25" (57.2)      | .75" (19.0)        | 7.80 (3.54)         | PROTRK1225Y    |
| 1 Channel, hinged cover, black  | 36.0" (914)        | 10.81" (274)      | 1.25" (31.8)       | 2.25" (57.2)      | .75" (19.0)        | 7.80 (3.54)         | PROTRK1225BK   |

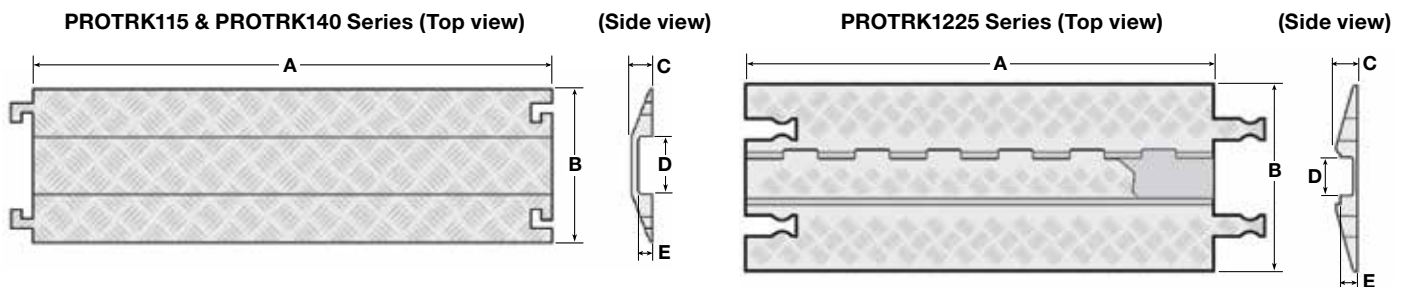

## Accessories

| ProTrak Series | Anti-Slip Pad Kits* |
|----------------|---------------------|
| PROTRK115      | <b>PROTRK1ASPK</b>  |
| PROTRK140      | <b>PROTRK2ASPK</b>  |
| PROTRK1225     | <b>PROTRK3ASPK</b>  |

\*One kit per section



## Load Capacity

| Product    | Test Fixture Footprint<br>Inches (mm) | Tire Load lbs. +/- 20% | Axle Load lbs. +/- 20% |
|------------|---------------------------------------|------------------------|------------------------|
|            |                                       | 70°F (21°C)            | 70°F (21°C)            |
| PROTRK115  | 6.9" x 17.3" (175 X 439)              | 10,500                 | 21,000                 |
| PROTRK140  | 6.9" x 17.3" (175 X 439)              | 10,500                 | 21,000                 |
| PROTRK1225 | 6.9" x 17.3" (175 X 439)              | 13,000                 | 26,000                 |

Dimensions in Inches (mm)