


Ordering Information

| Description | UPC Number | Catalog Number |
|-------------------------------------------------------------|------------|----------------|
| 3P 4W LINKOSITY® double ended (male/female) 5-50 foot cable | | PH3004PAXXX |

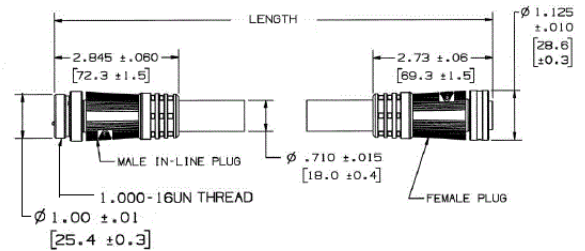

Listings

UL 2238; UL 50E

Specifications

| | |
|-----------------------|--------------------------------------------------|
| Contact Carrier | Nylon 6/6, white |
| Cable (16 AWG and Up) | UL 600V Type TC-ER, MTW 90°C or ST00W 600V 105°C |

Performance

| Electrical | Environmental |
|------------|---------------------|
| Amperage | Flammability |
| Voltage | Ingress Protection |
| | Moisture Resistance |

Up to 30A
Up to 600V AC

UL94HB
IP67 Suitability
UL Type 4, 4X, 12 and 13

Complementary Products

| | |
|--------------------------------------------------------------|-------------------------------------------|
| Type 1 Non-Metallic Enclosure 30A 3 Pole 600V AC | HBL1389MQR, HBL1389MQ5, HBL1389MQR2 |
| Type 4X Non-Metallic Labelless Enclosure 30A 3 Pole 600V AC | HBLDS3MQR, HBLDS3MQ5, HBLDS3MQR2 |
| Type 4X Stainless Steel Enclosure 30A 3 Pole 600V AC, Sloped | HBLDS3SSRMQR, HBLDS3SSRMQ5, HBLDS3SSRMQR2 |
| Type 4X Stainless Steel Enclosure 30A 3 Pole 600V AC, Square | HBLDS3SSMQR, HBLDS3SSMQ5, HBLDS3SSMQR2 |

Online Resources

eCatalog