

Flush Mount

Ceiling mounted • Damp location listed



Description:

One-light LED 11" flush mount features a modern circular/square pattern in an Antique Bronze metal shade that surrounds a summer linen fabric shade with a glass diffuser. 3000K, 90+ CRI 1,211 Lumens 71.2 lumens/watt per module.

Specifications:

- Antique Bronze (-20) (painted)
- Steel Construction
- Fabric Shade glass shade
- LED Module is replaceable (part # 93053641)
- Concentric circular pattern in an Antique Bronze metal shade.
- Etched parchment glass.
- Contemporary styling.
- Dimmable to 10% with many ELV dimmers
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1211/71.2 (LM-82)
Lumens/LPW (Delivered)	814.8/48.5 (LM-79)
CCT	3000 K
CRI	90+
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified

P2327-2030K9

Images:



Dimensions:

Diameter: 11"
Height: 5-7/8"

Flush Mount

Ceiling mounted • Damp location listed



Photometrics:


P2327-2030K9

ELECTRICAL DATA	P2327-2030K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

*See Dimming Notes for more information

P2327-2030K9

LED Light Engine: 3000 K 90+
System Wattage: 17
Fixture delivered lumens: 814.8
Fixture Efficacy: 48.5
Spacing Criteria: 1.2

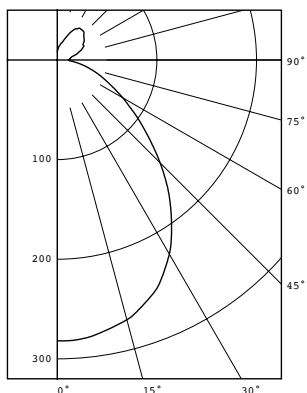

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	282	
5	281	27
15	270	76
25	245	112
35	200	125
45	146	113
55	96	86
65	59	59
75	34	36
85	15	17
90	10	
95	13	14
105	18	19
115	28	27
125	33	29
135	38	29
145	39	24
155	30	14
165	18	5
175	12	1
180	8	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	215	26.4
0-40	340	41.8
0-60	539	66.2
0-90	651	80.0
90-120	60	7.4
90-130	89	11.0
90-150	142	17.5
90-180	163	20.0
0-180	814	100.0

Test 16.00423 Test Date 02/19/16

P2327-2030K9

Dimming Notes:

P2327 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron	Nova T	NTELV-300
Lutron	Vierti	VTELV-600
Lutron	Maestro	MAELV-600
Lutron	spacer/system	SPSELV-600
Leviton	Renoir II	AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.