Fire-Classified Floor Box Solutions





CFB7G6 Floor Box above CFB7G6FRK Installed in decking

Hubbell's fire-classified floor boxes are an excellent solution when there is not enough capacity in a poke through and the decking must be penetrated for electrical installations. Available in seven or eleven gang versions, our fire rated kits are compatible with our standard CFB7G6 and CFB11G6 series floor boxes.

Fire-Classified Floor Box Kits


- Preserves 2 or 3 hour fire classified floor rating
- Approved for installations using either light or normal weight concrete
- UL 514 and UL 263 Compliant
- Variety of ADA compliant cover choices for most floor types
- Four 11/2 inch box bottom entry conduits

Fire-Resistant Floor Box Kit Includes

• Floor pan, conduit assemblies, hardware, leveling feet and manual Floor box ordered separately

Installation


- For Concrete pours from 3¼ in. up to 5½ in. above upper most portion of decking
- Units can be mounted 2 ft. on center
- Fastens to deck with TEK screws or welding

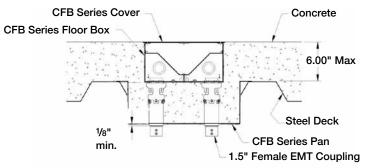

CFB7G6/CFB11G6 Series

Fire-Classified Kit for 7-Gang Floor Box

Floor box, cover and mounting plates NOT included.

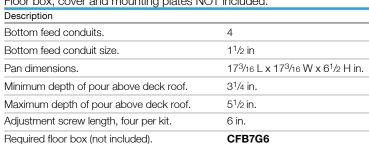



CFB7G6FRK Kit with CFB7G6

CFB11G6FRK Kit with CFB11G6

Dimensions in Inches (mm)

Fire-Classified Kit for 11-Gang Floor Box

Floor box, cover and mounting plates NO1 included.		
Description		
Bottom feed conduits.	4	
Bottom feed conduit size.	1 ¹ / ₂ in.	
Pan dimensions.	$20^{11}/_{16} L x 17^{3}/_{16} W x 6^{1}/_{2} H in.$	

Required floor box (not included)	CER11G6	
Adjustment screw length, four per kit.	6 in.	
Maximum depth of pour above deck roof.	5 ¹ / ₂ in.	
Minimum depth of pour above deck roof.	3 ¹ /4 in.	

Catalog Number CFB11G6FRK

Catalog Number CFB7G6FRK