


30 Amp, 125/250 and 3Ø 250 Volts AC
3 Pole, 3 Wire, Non-Grounding and 3 Pole, 4 Wire, Grounding



HBL2711SW

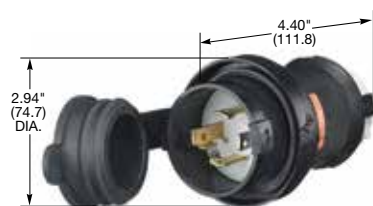


HBL2711S



HBL2711



HBL2715SW



HBL2715

Plugs

Watertight Safety-Shroud®

Description		Cord Dia.	Catalog Number	IP66 SUITABILITY	UL Type 4x, 12
Black Valox® housing, white Valox® clamps.		.350"-1.150" (9-29)	-	HBL2711SW	HBL2721SW

Safety-Shroud®

Description		Cord Dia.	Catalog Number	IP20 SUITABILITY
Black and white nylon body, white Valox® shroud. Can be used with the Insulgrip Connector Bodies.		.350"-1.150" (9-29)	-	HBL2711S HBL2721S

Note: See page B-40 for accessories.

Insulgrip®

Description		Cord Dia.	Catalog Number	IP20 SUITABILITY
Black and white nylon.		.350"-1.150" (9-29)	-	HBL2711 HBL2721
Black and white nylon, (Not shown).		.300"-.950" (7.6-24.1)	HBL2661	-
Corrosion resistant, yellow nylon.		.350"-1.150" (9-29)	-	HBL27CM11 HBL27CM21
All black nylon.		.350"-1.150" (9-29)	-	HBL2711BK -

Note: See page B-52 for accessories.

Flanged Inlets

Watertight Safety-Shroud®

Description		Catalog Number	IP66 SUITABILITY	UL Type 4x, 12
Gray Valox® housing and flange.		-	HBL2715SW	HBL2725SW
Reverse service, gray Valox® housing and flange (use with HBL2713SR), (Not shown).		-	HBL2715SWR	-

Note: See page B-54 for accessories.

Insulgrip®

Description		Catalog Number	IP20 SUITABILITY
Nylon casing, back wired.		-	HBL2715 HBL2725
Nylon casing, back wired, (Not shown).		HBL2665	-
Nylon casing, weather protective, die cast aluminum, back wired, self closing lift cover.		-	HBL2715M3 -

Note: See page B-52 for accessories.

See pages B-69 and B-70 for technical information on Twist-Lock and Watertight Safety-Shroud devices.



HBL2715M3

HBLMITL - For use with Watertight Safety-Shroud receptacles and reverse service inlet, see page B-41.



Dimensions in Inches (mm)

Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.