

# HUBBELL SystemOne

Recessed  
4, 6 and 8 Inch  
Fire-Rated  
Poke-Throughs



Hubbell's SystemOne Recessed Fire-Rated Poke-Throughs (FRPT) enhances functionality providing increased power, data and audio visual capacity. Safety is improved with recessed connectivity, a low profile flange, and egress doors that hinge inwards. Building value is enhanced with plated finishes to match and blend with modern building décor.

## Hubbell SystemOne Recessed FRPTs for 8" Core Hole Applications...




### High Capacity Multimedia

Sub-plate layout for the center three gangs of the eight inch FRPT allows for maximum audio visual capacity. The NEMA spacing allows the product flexibility to easily accept 3rd party products.

### High Capacity Multimedia

Perimeter sub plates for the eight inch FRPT help compliment the audio visual or data in the center three gangs. Additionally these plates can be exchange for other low voltage compatible plates.

### 8 Inch Recessed Access



Center Sub-Plates  
with Outer Sub-plates

Fire-Rated Poke-Throughs .....	4
Sub-Plates, Covers and Accessories .....	5
One-Piece Units .....	10

## Hubbell SystemOne Recessed FRPTs for 6" Core Hole Applications...




### 60/40 6" Sub-Plate Split

An Industry first, the 60/40 sub-plate layout allows for unmatched capacity with up to 12 keystone jacks and one 20A duplex.

Two duplexes with ample audio/video and data are achieved by using the 50/50 sub-plate layout. Additionally this layout will accommodate two Style Line® devices for GFCI, surge, etc. applications.

### 50/50 6" Sub-Plate Split

### 6 Inch Recessed Access

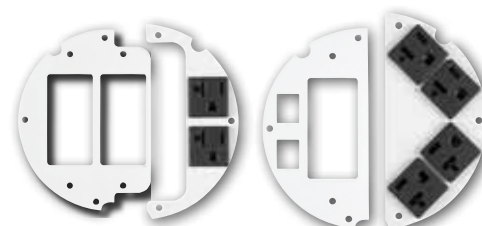

60/40 split  
Sub-Plates

50/50 split  
Sub-Plates

Fire-Rated Poke-Throughs .....	6
Sub-Plates, Covers and Accessories .....	7
One-Piece Units .....	11

## Hubbell SystemOne Recessed FRPTs for 4" Core Hole Applications...




### 4" Quad Sub-Plate

The quad sub-plate can be wired on one circuit or two and includes 18 inch of stranded 12AWG wire.

### 4" 2X2 Sub-Plate

The 2x2 sub plates are available with Style Line® or traditional duplex openings and can accommodate up to two keystone jacks.

### 4 Inch Recessed Access

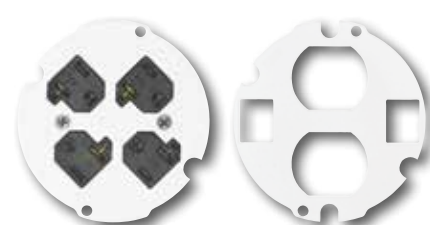

Quad Sub-Plate

Multi & Single Service  
Sub-Plates

Fire-Rated Poke-Throughs .....	8
Sub-Plates, Covers and Accessories .....	9
One-Piece Units .....	12

## Benefits and Enhancements

### Safety

- Low profile flange, 0.150", is better than ADA requirements
- Hide-away egress door fold under cover while in use
- 180° opening of main door

### Functionality

- Cables and connections are protected by recessed functionality
- Open architecture sub-plate design
- Dirt ingress reduced by egress door brushes
- Exceeds UL 514A Scrub Requirements with ScrubShield® technology
- Easy selection with common flange for all floor types



### Value

- Enhance building décor with numerous finishes
- Increase durability and longevity with cast aluminum covers

## 8 Inch Sub-Plate Features



### Center Plate Configurations

- Allows for three duplex receptacles or up to 18 data and or audio visual jacks
- Open architecture sub-plate design accommodates FSR®, Extron®, Crestron®, etc.
- NEMA spacing between devices
- All plates can be independently wired

### Outer Plate Configurations

- Available in pre-wired 20A duplex receptacles or data/AV plates
- Multiple 20A duplex receptacles can be wired to a common circuit or independently

## 6 Inch Sub-Plate Features



### 60/40 Device Plate Combination

- Allows for a wide array of data and audio visual connectivity with a 20A duplex receptacle
- The two plates can be independently wired



### 50/50 Device Plate Combination

- Accommodates up to two 20A duplex receptacles with eight data or audio visual connections
- The two plates can be independently wired

## 4 Inch Sub-Plate Features



### Plate Configurations

- Quad receptacle sub-plate, single or dual circuit wiring
- 2x2 sub plate for decorator or traditional receptacles plus two keystone jacks
- Since service decorator or traditional sub-plates

## On-line Resources

- BIM models, customer drawings and technical specifications are available on [www.hubbell-wiring.com](http://www.hubbell-wiring.com)


Extron® is a registered trademark of Extron Electronics.  
Crestron® is a registered trademark of Crestron Electronics, Inc.  
FSR® is a registered trademark of FSR Inc.



## 8 Inch Fire-Rated Poke-Through Fittings

- Step down installation
- Maintains concrete floor fire rating up to two hours
- Junction box standard
- For use in the City of Chicago, junction box NOT included

**ScrubShield®**  
Complies with UL514A

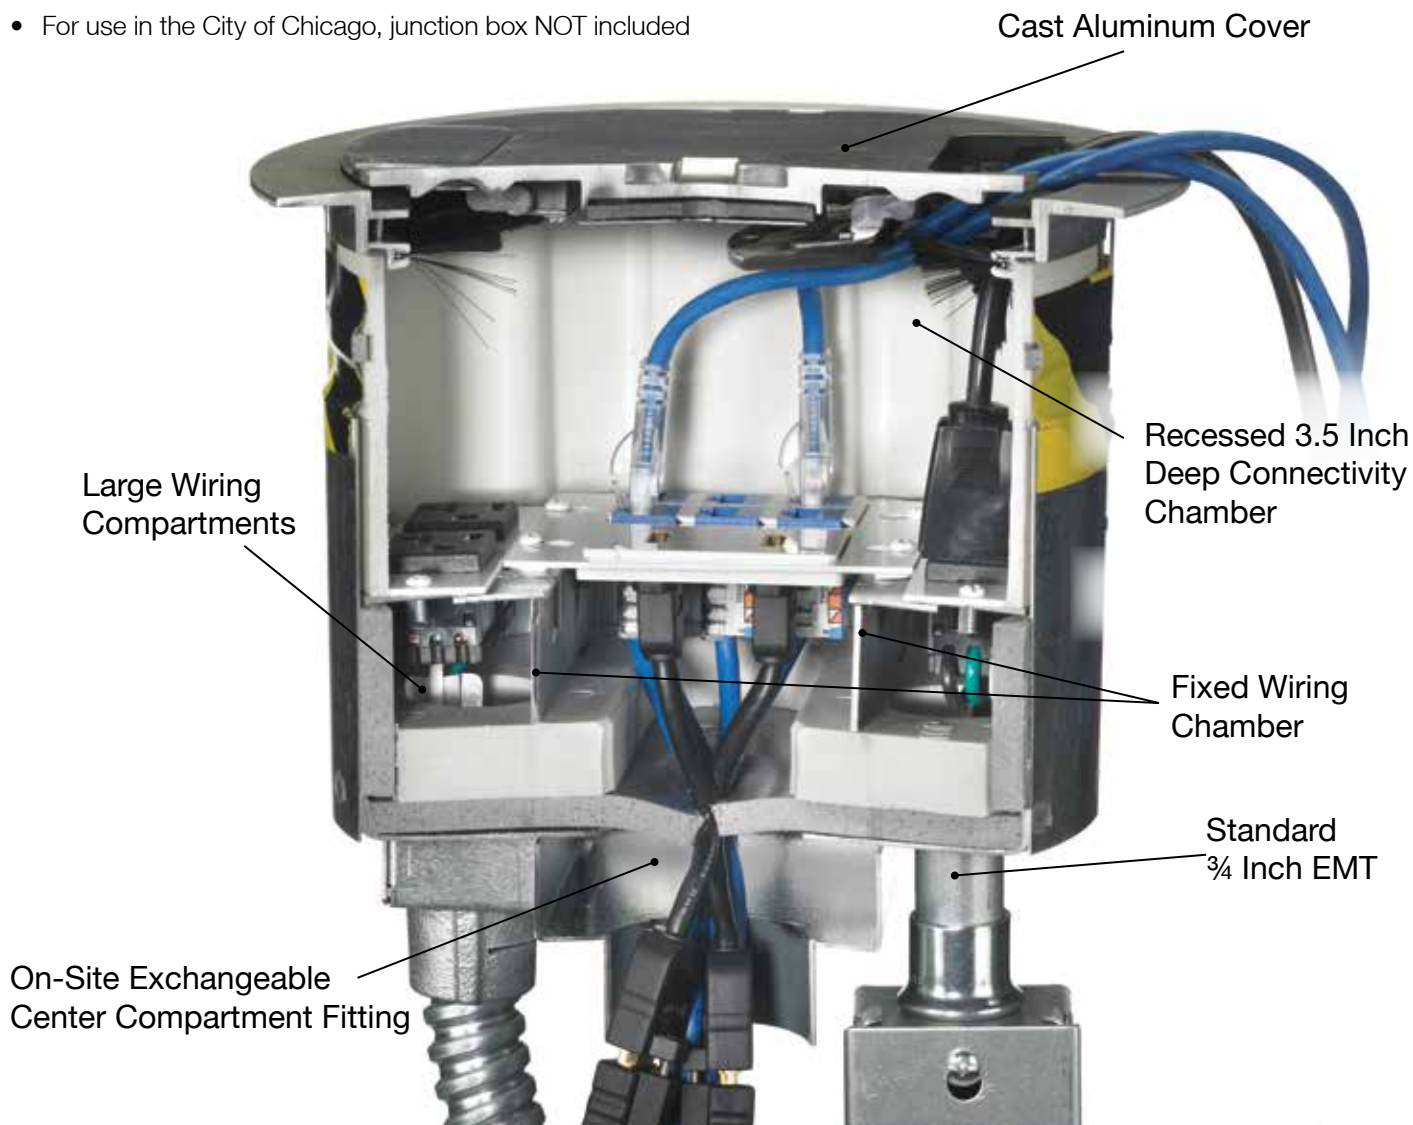

## 8 Inch Fire-Rated Poke-Through



Description	Catalog Number
8 Inch Fire-Rated Poke-Through includes: (1) 3/4 inch power EMT plus (1) S1R8JNC1 with (1) 1 inch EMT and (1) 1 1/2 inch EMT.	<b>S1R8PTFIT1</b>
8 Inch Fire-Rated Poke-Through includes: (1) 3/4 inch power EMT plus (1) S1R8JNC2 with (2) 1 inch EMT.	<b>S1R8PTFIT2</b>
8 Inch Fire-Rated Poke-Through includes: (1) 3/4 inch power EMT plus (1) S1R8JNC3 with (1) 2 inch EMT.	<b>S1R8PTFIT3</b>
8 Inch Fire-Rated Poke-Through includes: (1) 3/4 inch power EMT plus (1) S1R8JNC1 with (2) 1 inch EMT and (1) 1 1/2 inch EMT. No junction box or flexible metal conduit.	<b>S1R8PTFIT1CHI</b>
8 Inch Fire-Rated Poke-Through includes: (1) 3/4 inch power EMT plus (1) S1R8JNC2 with (2) 1 inch EMT. No junction box or flexible metal conduit.	<b>S1R8PTFIT2CHI</b>
8 Inch Fire-Rated Poke-Through includes: (1) 3/4 inch power EMT plus (1) S1R8JNC3 with (1) 2 inch EMT. No junction box or flexible metal conduit.	<b>S1R8PTFIT3CHI</b>



**S1R8PTFIT1**



**S1R8PTFIT2**



**S1R8PTFIT3**









## 8 Inch Sub-Plates

### Center Plate Configurations






- Allows for 3 duplexes or up to 18 data/AV jacks. Other combinations possible
- Accepts third party AV devices (i.e. FSR®, Crestron®, Extron®)
- Standard NEMA spacing between devices



#### Center Sub-Plates - Single Gang

Description	Catalog Number	Description	Catalog Number
Blank cover plate	 <b>S1R8CSPB</b>	(2) Extron® MAAP openings	 <b>S1R8CSPC</b>
(1) 1 unit Hubbell iSTATION opening	 <b>S1R8CSPD</b>	(1) 1.5 unit Hubbell iSTATION opening	 <b>S1R8CSPE</b>
(1) 1.60" Twist-Lock® opening	 <b>S1R8CSPG</b>	(1) duplex opening	 <b>S1R8CSPI</b>
(1) 1.40" Twist-Lock® opening	 <b>S1R8CSPJ</b>	(1) Style Line® Decorator opening	 <b>S1R8CSPK</b>

#### Center Sub-Plates - Two and Three Gang

Two-gang; (4) Extron® AAP openings	 <b>S1R8CSPA</b>	Two gang; 3 unit Hubbell iSTATION opening	 <b>S1R8CSPL</b>
Two gang; (2) Style Line® Decorator openings	 <b>S1R8CSPM</b>	Device depth extension collar (for use with 3rd party device up to 2.5" depth)	 <b>S1R8CSPEXT</b>
Three gang; blank cover plate	 <b>S1R8CSPN</b>		

Note: Rectangle sub-plates are for center compartment, crescent sub-plates are for outer compartments and are not inter-changeable.







Extron® is a registered trademark of Extron Electronics.  
Crestron® is a registered trademark of Crestron Electronics, Inc.  
FSR® is a registered trademark of FSR Inc.

### Outer Plate Configurations

- Available in pre-wired duplexes or openings to accommodate third party AV Devices
- Multiple duplexes can be wired in the supplied junction box or independently



#### Outer Sub-Plates

Description	Catalog Number	Description	Catalog Number
Blank cover plate	 <b>S1R8PSPU</b>	Single Extron® MAAP opening	 <b>S1R8PSPV</b>
Pull through with 1" bushing opening	 <b>S1R8PSPW</b>	Single Extron® MAAP opening	 <b>S1R8PSPX</b>
(1) 1 unit Hubbell iSTATION opening	 <b>S1R8PSPY</b>	Dual 20A pre-wired power cubes; One circuit	 <b>S1R8PSPZ</b>

## Recessed 8 Inch Cover

Single Piece 8 Inch FRPT Cover Assembly unit includes solid cast aluminum construction, carpet gasket and mounting hardware.



Finish	Catalog Number
Brushed Aluminum	<b>S1R8CVRALU</b>
Black Powder Coat	<b>S1R8CVRBLK</b>
Brushed Brass Plated	<b>S1R8CVRBRS</b>
Bronze Plated Finish	<b>S1R8CVRBRZ</b>
Satin Nickel Plated	<b>S1R8CVRNKL</b>

## 8 Inch Accessories



Description	Catalog Number
Pre-pour tube, includes hardware	<b>S1R8PPT*</b>
Abandonment plate, black finish	<b>S1R8ADMTBK</b>
Low voltage replacement divider	<b>S1R8DIV</b>
Power junction box, 27.0 cubic inches; (1) ¾ inch and (1) 1 inch EMT connector	<b>S1FRPTJB</b>
Replacement fitting box	
(1) 1½ inch & (1) 1 inch EMTs	<b>S1R8JNC1</b>
(2) 1 inch EMTs	<b>S1R8JNC2</b>
(1) 2 inch EMT	<b>S1R8JNC3</b>

\* Not UL Listed.



**S1R8PPT**



**S1FRPTJB**



**S1R8JNC1**



**S1R8JNC2**




**S1R8JNC3**

## 6 Inch Fire-Rated Poke-Through Fittings

**ScrubShield®**  
Complies with UL514A

- Step down installation
- Maintains concrete floor fire rating up to two hours
- Junction box standard
- Includes (1) 2 inch data/AV EMT and (1) ¾ inch power EMT
- For use in the City of Chicago, junction box NOT included

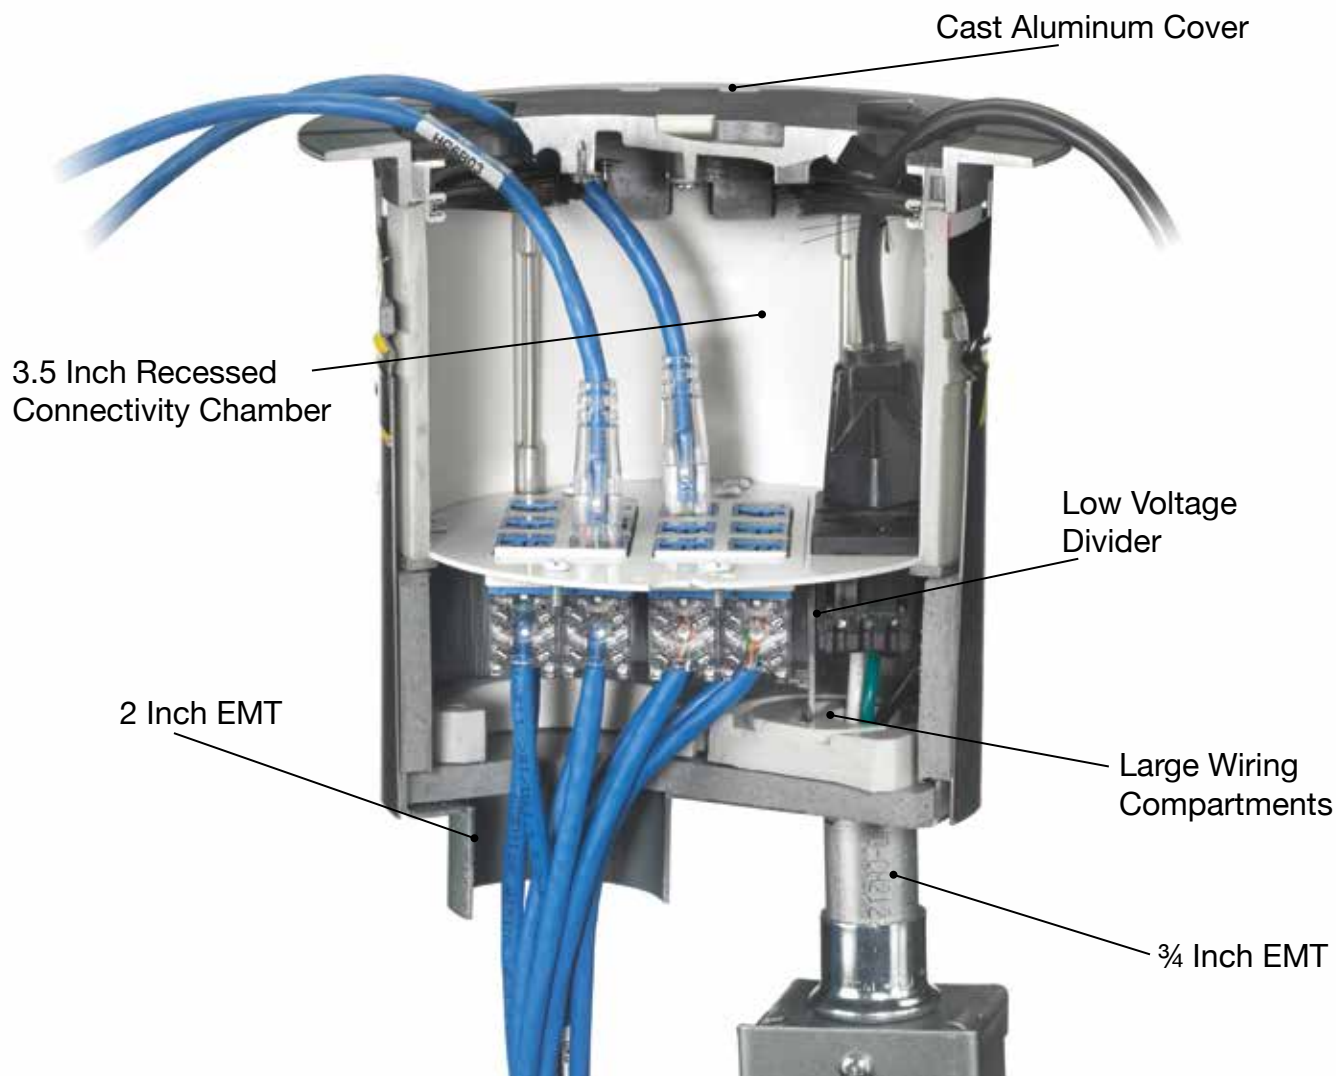

## 6 Inch Fire-Rated Poke-Through



Description	Catalog Number
6 Inch Fire-Rated Poke-Through.	<b>S1R6PTFIT</b>
6 Inch Fire-Rated Poke-Through; junction box NOT included.	<b>S1R6PTFITCHI</b>









## 6 Inch Sub-Plates

### 60/40 Device Plate Combination



- Allows for up to twelve data/AV jacks plus a 20A duplex receptacle
- Two plates which can be wired independently



#### Left 60% Sub-Plates

Description	Catalog Number	Description	Catalog Number
(1) Style Line® Decorator and (2) Extron® AAP openings, left side only	 <b>S1R6SPV</b>	(1) Style Line® Decorator and (2) Extron® AAP openings, left side only	 <b>S1R6SPX</b>
(2) Style Line® Decorator openings, left side only	 <b>S1R6SPW</b>	(1) Style Line® Decorator and (2) 1.5 unit Hubbell iSTATION openings, left side only	 <b>S1R6SPY</b>

#### Right 40% Sub-Plates

(2) 20A pre-wired receptacles; 16 inch lead; one circuit, right side only	 <b>S1R6SPZ</b>	(2) 20A pre-wired receptacles; 25 foot lead; one circuit, right side only	 <b>S1R6SPZ25</b>
---------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------

## Recessed 6 Inch Cover

6 Inch Fire-Rated Poke-Through cover assembled unit includes solid cast aluminum construction, carpet gasket and mounting hardware.



Finish	Catalog Number	Furniture Feed Option
Brushed Aluminum	<b>S1R6CVRALU</b>	<b>S1R6FFCVRALU</b>
Black Powder Coat	<b>S1R6CVRBLK</b>	<b>S1R6FFCVRBLK</b>
Brushed Brass Plated	<b>S1R6CVRBRS</b>	<b>S1R6FFCVRBRS</b>
Bronze Plated Finish	<b>S1R6CVRBRZ</b>	<b>S1R6FFCVRBRZ</b>
Satin Nickel Plated	<b>S1R6CVRNKL</b>	<b>S1R6FFCVRNKL</b>

## 6 Inch Accessories



Description	Catalog Number
Pre-pour tube, includes hardware	<b>S1R6PPT*</b>
Abandonment plate, black finish	<b>S1R6ADMTBK</b>
Low voltage replacement divider	<b>S1R6DIV</b>
Power junction box, 27.0 cubic inches; (1) ¾ inch and (1) 1 inch EMT connector	<b>S1FRPTJB</b>
Replacement furniture feed fitting	2 Inch <b>S1RFFFIT2</b> ¾ Inch <b>S1RFFFIT075</b>
Replacement plugs	2 Inch <b>S1RPLUG2ALU</b> ¾ Inch <b>S1RPLUG075ALU</b> Aluminum <b>S1RPLUG2BLK</b> <b>S1RPLUG075BLK</b> Black <b>S1RPLUG2BRS</b> <b>S1RPLUG075BRS</b> Brass <b>S1RPLUG2BRZ</b> <b>S1RPLUG075BRZ</b> Bronze <b>S1RPLUG2NKL</b> <b>S1RPLUG075NKL</b> Nickel











\* Not UL Listed.

### 50/50 Device Plate Combination






- Allows for up to eight Hubbell data jacks plus two 20A duplex receptacles
- Two plates which can be wired independently



#### Left 50% Sub-Plates

Description	Catalog Number	Description	Catalog Number
(3) Extron® AAP plate openings, left side only	 <b>S1R6SPA</b>	Blank cover plate, left side only	 <b>S1R6SPB</b>
(5) Extron® MAAP plate openings, left side only	 <b>S1R6SPC</b>	(4) 1 unit Hubbell iSTATION openings, left side only	 <b>S1R6SPD</b>
(1) Style Line® Decorator and (2) Hubbell keystone openings, left side only	 <b>S1R6SPE</b>	(2) 1.5 unit Hubbell iSTATION openings, left side only	 <b>S1R6SPF</b>
(3) Extron® MAAP openings and (2) Hubbell keystone jack openings, left side only	 <b>S1R6SPL</b>	(1) Style Line® Decorator opening, left side only	 <b>S1R6SPM</b>

#### Right 50% Sub-Plates

(1) 1.60 inch opening for Twist-Lock®, right side only	 <b>S1R6SPG</b>	(4) 20A pre-wired receptacles; 16 Inch leads; one or two circuits, right side only	 <b>S1R6SPH</b>
(1) duplex device opening, right side only	 <b>S1R6SPI</b>	(1) 1.40 inch opening for simplex or Twist-Lock®, right side only	 <b>S1R6SPJ</b>
(1) Style Line® Decorator device opening, right side only	 <b>S1R6SPK</b>		


Note: Sub-plates can not be rotated to create additional layouts. When assembled, sub-plates can not overlap. Custom Plates available upon request and may be subject to minimum order quantity.

Extron® is a registered trademark of Extron Electronics.

## 4 Inch Fire-Rated Poke-Throughs

- Step down installation
- Maintains concrete floor fire rating up to two hours
- Junction box standard, 27 cubic inches
- (1) ¾ inch conduit for power and (2) ½ inch conduits for low voltage
- For use in the City of Chicago, junction box NOT included

**ScrubShield®**  
Complies with UL514A

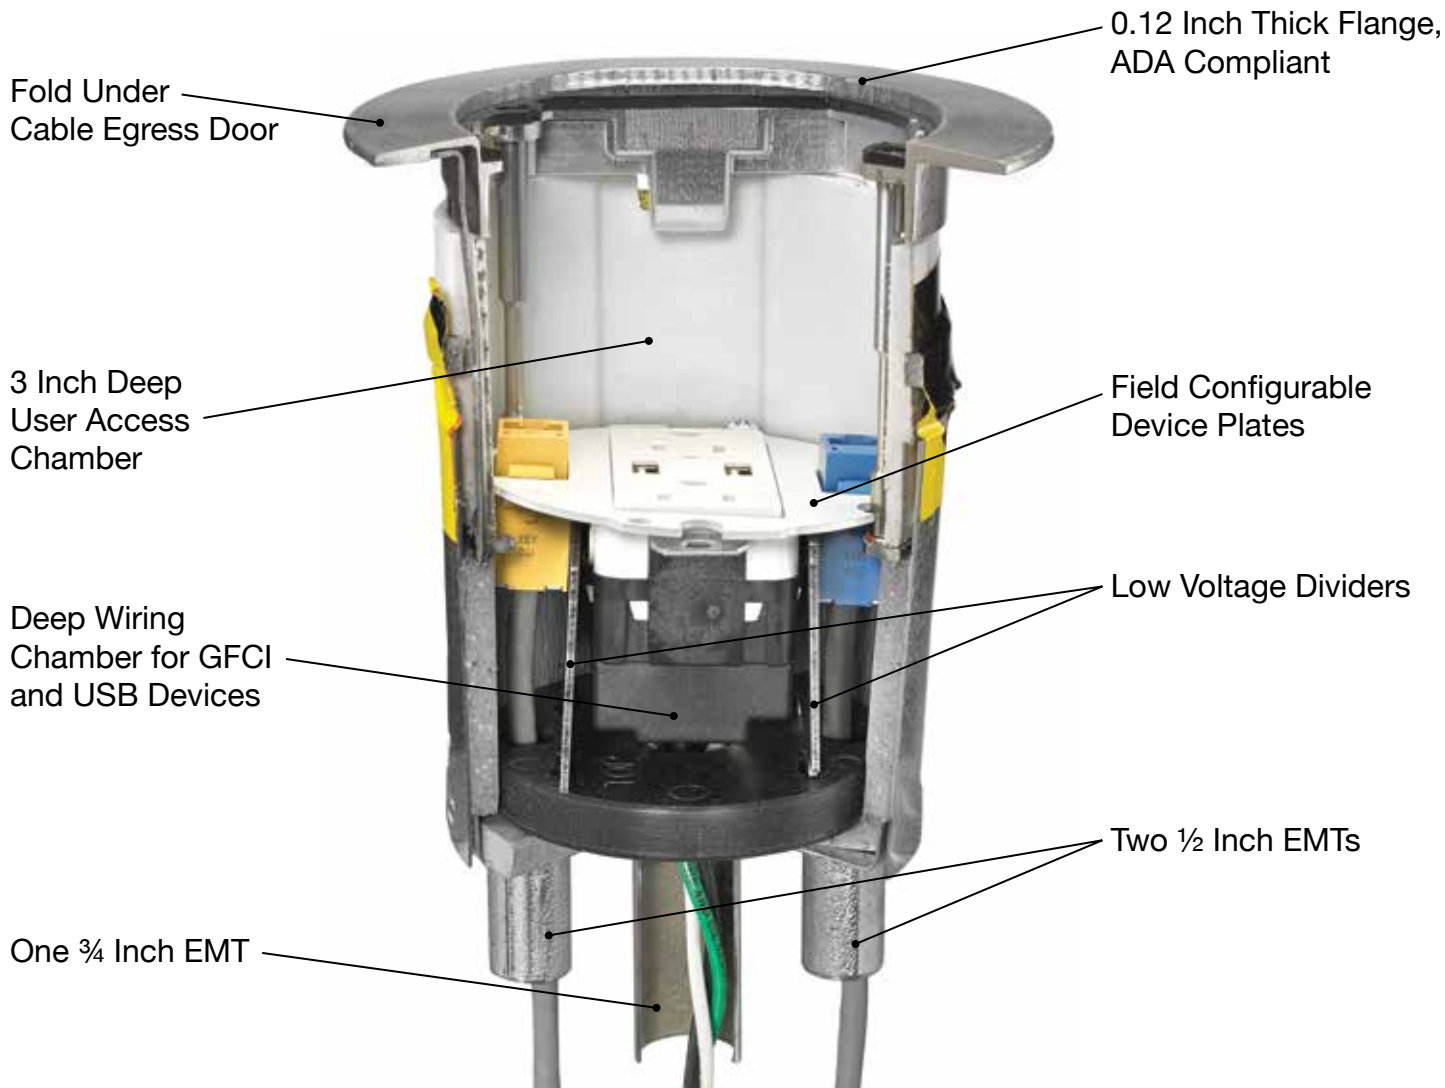

## 4 Inch Fire-Rated Poke-Through



Description	Catalog Number
4 Inch FRPT includes: Junction box and low voltage dividers.	<b>S1R4PTFIT</b>
4 Inch FRPT includes: Low voltage dividers, junction box NOT included.	<b>S1R4PTFITCHI</b>
4 Inch FRPT includes: Quad sub-plate and junction box.	<b>S1R4PTQUAD</b>



**S1R4PTFIT**  
**S1R4PTQUAD**



**S1R4PTFITCHI**



## 4 Inch Covers and Device Plates

The 4 Inch recessed cover is available in a number of durable, yet beautiful finishes to match any décor. The flange height of 0.12 inch is ADA compliant and suitable for use on any floor finish. All covers are UL514A, scrubwater compliant.





### Architectural Cover Finishes

Description	Catalog Number
Brushed Aluminum Finish, Single fold under cable egress door.	<b>S1R4CVRALU</b>
	
Plated Brushed Brass Finish, Single fold under cable egress door.	<b>S1R4CVRBRS</b>
	
Plated Antique Bronze Finish, Single fold under cable egress door.	<b>S1R4CVRBRZ</b>
	
Plated Satin Nickel Finish, Single fold under cable egress door.	<b>S1R4CVRNKL</b>
	

Note: COVER LOAD RATING: 1,000 LBS with 2x safety factor. Load applied through a 3" (76mm) mandrel in center of the cover. Static loads only.



### Multi-Service Device Plates

Description	Catalog Number
2X2 Sub-plate with one duplex device opening and two keystone jack openings*.	<b>S1R4SP2X2DUPLEX</b>
	
2X2 Sub-plate with one Style Line® decorator device opening and two keystone jack openings*.	<b>S1R4SP2X2STYLE</b>
	

Note: \*Go to [www.hubbell-wiring.com](http://www.hubbell-wiring.com) for data jacks and frames.

For low light applications (i.e. under tables or podiums) consider using Hubbell's LED illuminated receptacles: HBL8200ILW 15A, LED or HBL8300ILW 20A, LED.



HBL8300ILW

### 4 Inch Accessories

Description	Catalog Number
Pre-pour tube, includes hardware	<b>S1R4PPT*</b>
Low voltage replacement divider	<b>S1R4DIV</b>



Note: \*Not UL Listed.



S1R4PPT S1R4DIV








### Powder Coated Cover Finishes

Description	Catalog Number
Black Powder Coat Finish, Single fold under cable egress door.	<b>S1R4CVRBLK</b>
	
Gray Powder Coat Finish, Single fold under cable egress door.	<b>S1R4CVRGRY</b>
	

Note: COVER LOAD RATING: 1,000 LBS with 2x safety factor. Load applied through a 3" (76mm) mandrel in center of the cover. Static loads only.



### Single-Service Device Plates

Description	Catalog Number
Four single 20A receptacles. Can be wired as single or two circuit with isolated ground capability, 24 inch wire leads.	<b>S1R4SPQUAD</b>
	
One 1.60 inch opening for 20 or 30A Twist-Lock® receptacle.	<b>S1R4SPTWIST</b>
	
One 1.40 inch opening for simplex receptacle.	<b>S1R4SPSIMPLEX</b>
	
One duplex device opening for power or datacom* applications.	<b>S1R4SPDUPLEX</b>
	
One Style Line® decorator device opening for power or datacom* applications.	<b>S1R4SPSTYLE</b>
	

Note: \*Go to [www.hubbell-wiring.com](http://www.hubbell-wiring.com) for data jacks and frames.

## Recessed 8 Inch Core Hole, One-Piece Units



### One-Piece Pre-Wired 8 Inch Fire-Rated Poke-Through

Assembled unit includes:

- (1) Hubbell SystemOne 8 inch floor fitting (S1R8PTFIT1)
- (4) 20A, pre-wired receptacles, 18 inch wire lead, two pieces (S1R8PSPZ)
- (1) Fitting connection box with 1 inch and 1½ inch EMT stubs (S1R8JNC1)
- (1) 8 inch flange and universal cover assembly (S1R8CVRxx)

Receptacles feature single circuit wiring



#### Finish

Brushed Aluminum  
Black Powder Coat  
Brass Plated  
Bronze Plated (Oil rubbed)  
Nickel Plated


#### Catalog Number

**S1R8PTZZ1ALU**  
**S1R8PTZZ1BLK**  
**S1R8PTZZ1BRS**  
**S1R8PTZZ1BRZ**  
**S1R8PTZZ1NKL**

### One-Piece 8 Inch Fire-Rated Poke-Through

Assembled unit includes:

- (1) Hubbell SystemOne 8 inch floor fitting (S1R8PTFIT1)
- (1) Fitting connection box with 1 inch and 1½ inch EMT stubs (S1R8JNC1)
- (1) 8 inch flange and universal cover assembly (S1R8CVRxx)



#### Finish

Brushed Aluminum  
Black Powder Coat  
Brass Plated  
Bronze Plated (Oil rubbed)  
Nickel Plated

#### Catalog Number

**S1R8PT1ALU**  
**S1R8PT1BLK**  
**S1R8PT1BRS**  
**S1R8PT1BRZ**  
**S1R8PT1NKL**

### One-Piece Pre-Wired 8 Inch Fire-Rated Poke-Through

Assembled unit includes:

- (1) Hubbell SystemOne 8 inch floor fitting (S1R8PTFIT2)
- (4) 20A, pre-wired receptacles, 18 inch wire lead, two pieces (S1R8PSPZ)
- (1) Fitting connection box with (2) 1 inch EMT stubs (S1R8JNC2)
- (1) 8 inch flange and universal cover assembly (S1R8CVRxx)

Receptacles feature single circuit wiring



#### Finish

Brushed Aluminum  
Black Powder Coat  
Brass Plated  
Bronze Plated (Oil rubbed)  
Nickel Plated


#### Catalog Number

**S1R8PTZZ2ALU**  
**S1R8PTZZ2BLK**  
**S1R8PTZZ2BRS**  
**S1R8PTZZ2BRZ**  
**S1R8PTZZ2NKL**

### One-Piece 8 Inch Fire-Rated Poke-Through

Assembled unit includes:

- (1) Hubbell SystemOne 8 inch floor fitting (S1R8PTFIT2)
- (1) Fitting connection box with (2) 1 inch EMT stubs (S1R8JNC2)
- (1) 8 inch flange and universal cover assembly (S1R8CVRxx)



#### Finish

Brushed Aluminum  
Black Powder Coat  
Brass Plated  
Bronze Plated (Oil rubbed)  
Nickel Plated

#### Catalog Number


**S1R8PT2ALU**  
**S1R8PT2BLK**  
**S1R8PT2BRS**  
**S1R8PT2BRZ**  
**S1R8PT2NKL**

### One-Piece Pre-Wired 8 Inch Fire-Rated Poke-Through for Data AV

Assembled unit includes:

- (1) Hubbell SystemOne 8 inch floor fitting (S1R8PTFIT3)
- (4) 20A, pre-wired receptacles, 18 inch wire lead, two pieces (S1R8PSPZ)
- (1) Fitting connection box with one 2 inch EMT stubs (S1R8JNC3)
- (1) 8 inch flange and universal cover assembly (S1R8CVRxx)

Receptacles feature single circuit wiring



#### Finish

Brushed Aluminum  
Black Powder Coat  
Brass Plated  
Bronze Plated (Oil rubbed)  
Nickel Plated


#### Catalog Number

**S1R8PTZZ3ALU**  
**S1R8PTZZ3BLK**  
**S1R8PTZZ3BRS**  
**S1R8PTZZ3BRZ**  
**S1R8PTZZ3NKL**

### One-Piece 8 Inch Fire-Rated Poke-Through

Assembled unit includes:

- (1) Hubbell SystemOne 8 inch floor fitting (S1R8PTFIT3)
- (1) Fitting connection box with one 2 inch EMT stub (S1R8JNC3)
- (1) 8 inch flange and universal cover assembly (S1R8CVRxx)



#### Finish

Brushed Aluminum  
Black Powder Coat  
Brass Plated  
Bronze Plated (Oil rubbed)  
Nickel Plated

#### Catalog Number

**S1R8PT3ALU**  
**S1R8PT3BLK**  
**S1R8PT3BRS**  
**S1R8PT3BRZ**  
**S1R8PT3NKL**

Note: xx indicates finish options.



## Recessed 6 Inch Core Hole, One-Piece Units

### One-Piece Pre-Wired 60/40 Split 6 Inch Fire-Rated Poke-Through for Data AV

Assembled unit includes:

- (1) Hubbell SystemOne 6 inch floor fitting (S1R6PTFIT)
- (2) Decorator opening sub-plate (S1R6SPW)
- (2) 20A, pre-wired receptacle with 18 inch wire leads (S1R6SPZ)
- (1) 6 inch flange and universal cover assembly (S1R6CVRxx)


Receptacles feature single circuit wiring.

Finish

Brushed Aluminum  
Black Powder Coat  
Brass Plated  
Bronze Plated (Oil rubbed)  
Nickel Plated

Catalog Number

**S1R6PTWZALU**  
**S1R6PTWZBLK**  
**S1R6PTWZBRS**  
**S1R6PTWZBRZ**  
**S1R6PTWZTNKL**



### One-Piece Pre-Wired 50/50 Split 6 Inch Fire-Rated Poke-Through for Data AV

Assembled unit includes:

- (1) Hubbell SystemOne 6 inch floor fitting (S1R6PTFIT)
- (4) 1 Unit Hubbell iSTATION openings (S1R6SPD)
- (1) Decorator opening and (2) keystone openings (S1R6SPE)
- (4) 20A, pre-wired receptacles (S1R6SPH)
- (1) 6 inch flange and universal cover assembly (S1R6CVRxx)

Opening architecture Keystone openings accept Hubbell modular jacks and many others.

Receptacles feature single or two circuit wiring and isolated ground capability.

Finish

Brushed Aluminum  
Black Powder Coat  
Brass Plated  
Bronze Plated (Oil rubbed)  
Nickel Plated

Catalog Number

**S1R6PTDEHALU**  
**S1R6PTDEHBLK**  
**S1R6PTDEHBRS**  
**S1R6PTDEHBRZ**  
**S1R6PTDEHNKL**



### One-Piece Pre-Wired 50/50 Split 6 Inch Fire-Rated Poke-Through for Third Party Devices

Assembled unit includes:

- (1) Hubbell SystemOne 6 inch floor fitting (S1R6PTFIT)
- (3) Extron® AAP openings (S1R6SPA)
- (5) Extron® MAPP openings (S1R6SPC)
- (1) Decorator opening and (2) Hubbell keystone openings (S1R6SPE)
- (4) 20A, pre-wired receptacles (S1R6SPH)
- (1) 6 inch flange and universal cover assembly (S1R6CVRxx)

Opening architecture Keystone openings accept Hubbell modular jacks and many others.


Receptacles feature single or two circuit wiring and isolated ground capability.

Finish

Brushed Aluminum  
Black Powder Coat  
Brass Plated  
Bronze Plated (Oil rubbed)  
Nickel Plated

Catalog Number

**S1R6PTACEHALU**  
**S1R6PTACEHBLK**  
**S1R6PTACEHBRS**  
**S1R6PTACEHBRZ**  
**S1R6PTACEHNKL**



### One-Piece 6 Inch Fire-Rated Poke-Through with Finished Cover

Assembled unit includes:

- (1) Hubbell SystemOne 6 inch floor fitting (S1R6PTFIT)
- (1) 6 inch flange and universal cover assembly (S1R6CVRxx)

Finish

Brushed Aluminum  
Black Powder Coat  
Brass Plated  
Bronze Plated (Oil rubbed)  
Nickel Plated

Catalog Number

**S1R6PTALU**  
**S1R6PTBLK**  
**S1R6PTBRS**  
**S1R6PTBRZ**  
**S1R6PTTNKL**



### One-Piece 6 Inch Fire-Rated Poke-Through for Furniture Feed Applications

Assembled unit includes:


- (1) Hubbell SystemOne 6 inch floor fitting (S1R6PTFIT)
- (1) 6 inch furniture feed flange and cover assembly (S1R6FFCVRxx)
- (1) 2 inch conduit fitting (S1RFFFIT2)
- (1) 3/4 inch conduit fitting (S1RFFFIT075)

Finish

Brushed Aluminum  
Black Powder Coat  
Brass Plated  
Bronze Plated (Oil rubbed)  
Nickel Plated

Catalog Number

**S1R6PTFFALU**  
**S1R6PTFFBLK**  
**S1R6PTFFBRS**  
**S1R6PTFFBRZ**  
**S1R6PTFFTNKL**



Note: xx indicates finish options.

Extron® is a registered trademark of Extron Electronics.




## Recessed 4 Inch Core Hole, One-Piece Units



### One-Piece Pre-Wired, Quad Receptacle, Recessed Connectivity, Fire-Rated Poke-Through for Power Only

Assembled unit includes:

- (1) Hubbell SystemOne 4 inch recessed floor fitting (S1R4PTFIT)
- (1) Hubbell SystemOne 4 inch recessed activation cover (S1R4CVRxx)
- (1) Hubbell pre-wired quad receptacle with mounting plate (S1R4SPQUAD)
- (1) Hubbell Junction box (S1FRPTJB)



Finish	Catalog Number
Brushed Aluminum	<b>S1R4PTQUADALU</b>
Brushed Brass Plated	<b>S1R4PTQUADBRS</b>
Antique Bronze Plated	<b>S1R4PTQUADBRSZ</b>
Satin Nickel Plated	<b>S1R4PTQUADNKL</b>
Black Powder Coat	<b>S1R4PTQUADBLK</b>
Gray Powder Coat	<b>S1R4PTQUADGRY</b>



### One-Piece, Fire-Rated Poke-Through, Recessed Connectivity

Assembled unit includes:

- (1) Hubbell SystemOne 4 inch recessed floor fitting (S1R4PTFIT)
- (1) Hubbell SystemOne 4 inch recessed activation cover (S1R4CVRxx)
- (1) Hubbell Junction box (S1FRPTJB)



Finish	Catalog Number
Brushed Aluminum	<b>S1R4PTALU</b>
Brushed Brass Plated	<b>S1R4PTBRS</b>
Antique Bronze Plated	<b>S1R4PTBRZ</b>
Satin Nickel Plated	<b>S1R4PTNKL</b>
Black Powder Coat	<b>S1R4PTBLK</b>
Gray Powder Coat	<b>S1R4PTGRY</b>



Note: xx indicates finish options.

## Recommended Fire-Rated Poke-Through Size Chart

To avoid over or under utilizing the capacity of the fire-rated poke-through, first determine how many gangs of power, data and AV are required for the application. The matrix below will guide you to the correct poke-through size.

Example: 2 gangs of power, 1 gang of AV and 1-gang of data is required.  
Find the intersection for 2 power gangs with 2 data/AV gangs.  
The highlighted intersection defines the recommended FRPT.

Recommended Fire-Rated Poke-Through Size						
POWER GANGS	5	8"	Exceeds capacity			
	4	8"	8"	of Hubbell recessed		
	3	6"	8"	8"	poke-throughs	
	2	6"	6"	8"	8"	
	1	4"	6"	6"	8"	8"
	0	—	4"	6"	8"	8"
		0	1	2	3	4
		DATA AND AV GANGS				
		5				

### Design Solutions for:

Commercial Office Space

Retail

Education

Mass Transit Hubs



Tile



Terrazzo



Carpet

For Technical files, including BIM models, CAD files and Customer drawings, please visit [www.hubbell-wiring.com](http://www.hubbell-wiring.com) under the Technical tab.