

# Hubbell Power Strips

*Only UL listed power strip  
approved by CMS for  
patient and critical care  
areas of a healthcare facility*

**Healthcare | UL2930 HCOAs**

**Industrial | UL1449 SPDs**

**Commercial/Retail | UL1363 RPTs**

# Healthcare Facility Outlet Assemblies (HCOA) UL2930 Listed

## UL2930 Listed



### Hubbell HCOA:

- UL2930 listed for patient care areas
- 15A and 20A 125V versions
- 6 ft. or 15 ft. cord length
- #12/3 AWG cord
- Surge protected models in all configurations
- Non-surge protected RPT models in all configurations



45° Angle Plug (15A only)

Green LED indicates  
surge protection working

Tamper-Resistant  
Flip covers

12/3 SJT  
15A and 20A Models

**HBL6MG620**  
Surge Protected  
HCOA

Ground Terminal

**HBL6MGRPT620**  
RPT HCOA

## UL2930 Healthcare Outlet Assembly (HCOA)

Description	# of Outlets	Cord Length	Color	15 Amp	20 Amp
UL 2930 HCOA	6	6 Ft.	White	<b>HBL6MG6</b>	<b>HBL6MG620</b>
with L-N Surge Protection	6	15 Ft.	White	<b>HBL6MG15</b>	<b>HBL6MG1520</b>
UL 2930 HCOA	6	6 Ft.	White	<b>HBL6MGRPT6</b>	<b>HBL6MGRPT620</b>
Relocatable Power Tap (RPT)	6	15 Ft.	White	<b>HBL6MGRPT15</b>	<b>HBL6MGRPT1520</b>



## UL2930 HCOA Specifications

	HBL6MG6/15	HBL6MG20/1520	HBL6MGRPT6/15	HBL6MGRPT20/1520	Physical Specifications	
<b>Electrical Specifications</b>					Cord	12/3 SJT
Current	15A	20A	15A	20A	Housing	18G Galvanized Steel
Voltage	125V	125V	125V	125V	Color	White Powder Coat
Frequency	60Hz	60Hz	60Hz	60Hz	Receptacles	HG Tamper Resistant
Surge Component	MOV	MOV	n/a	n/a	Plug:	HG 45° Angle HG 90° Angle Green Power Indicator
<b>Performance</b>					<b>Dimensions</b>	
UL VPR L-N	600V				HBL6MG Series:	
L-G, N-G	n/a				Length	16.02" (406.9mm)
EMI Noise Filtration:	-11 dB to -68 dB (10kHz to 100MHz)				Width	2.22" (56.4mm)
In (Nominal Discharge Current)	3kA		n/a	n/a	Depth	1.92" (48.8mm)
MCOV	150V				HBL6MGRPT Series:	
Peak Current Rating L-N	30KA				Length	12.72" (323.1mm)
Leakage Current:	<.1mA				Width	2.22" (56.4mm)
Total Joules (L-N)	550j				Depth	1.92" (48.8mm)
<b>Environmental Specifications</b>						
Operating Temperature	-40°F to 160°F (-40°C to 70°C)					

### Certifications


UL 2930; UL File # E488399; RoHs Compliant; NFPA 99 2012 ed; ANSI / IEEE Category A (HBL6MG Series Only)

# Heavy Duty SpikeShield® Surge Protection for Industrial and Healthcare Applications

**HUBBELL®**  
Wiring Device-Kellems

## Healthcare Industry:

- Hospital Grade • Tamper-Resistant Receptacles with a Hospital Grade • Plug
- cULus 1449 4th Edition
- Heavy Duty Metal Housing
- Available with a 2-Port USB Charging Outlet

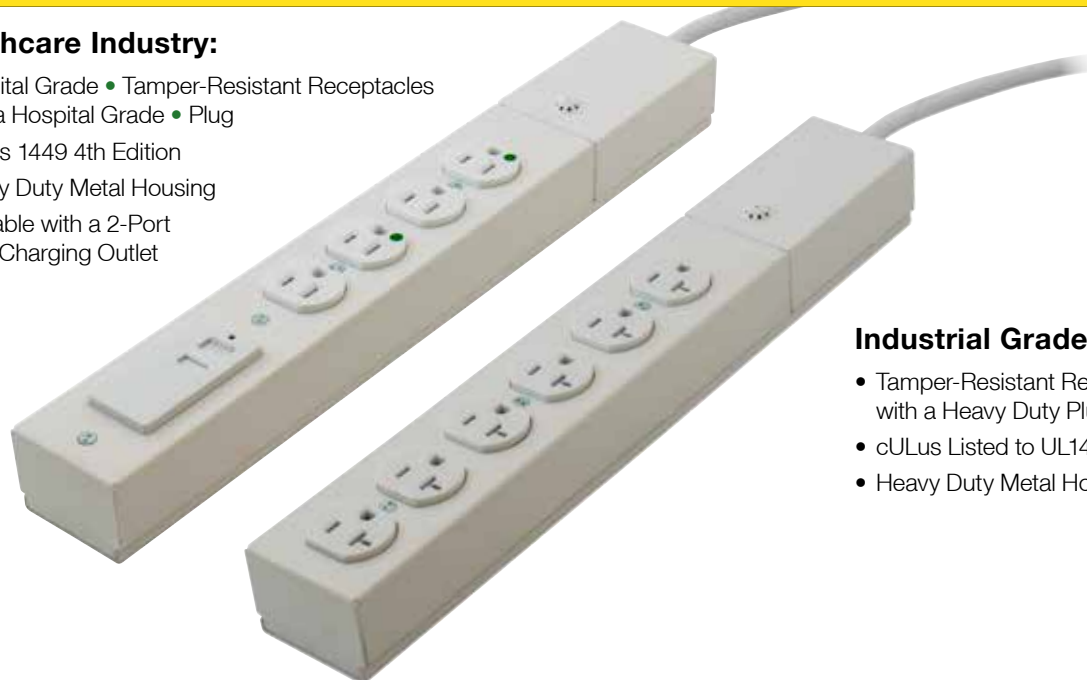

Listed to UL1449



## Industrial Grade:

- Tamper-Resistant Receptacles with a Heavy Duty Plug
- cULus Listed to UL1449 4th Edition
- Heavy Duty Metal Housing

## SpikeShield® Surge Protective Devices (SPD) with Hospital Grade • Tamper-Resistant Receptacles and Hospital Grade • Plug

Description	# of Outlets	Cord Length	Color	15 Amp	20 Amp
Type 3 SPD, Heavy Duty Metal Housing	6	6 Ft.	White	<b>HBL6HG6</b>	<b>HBL6HG620</b>
	6	15 Ft.	White	<b>HBL6HG15</b>	<b>HBL6HG1520</b>
UL Type 3 SPD, Heavy Duty Metal Housing with 2-port USB	4	6 Ft.	White	<b>HBL6HGUSB6</b>	—



## SpikeShield® Surge Protective Devices (SPD) with Industrial Grade Tamper-Resistant Receptacles and Heavy Duty Plug

Description	# of Outlets	Cord Length	Color	15 Amp	20 Amp
Type 3 SPD, Heavy Duty Metal Housing	6	6 Ft.	White	<b>HBL6SS6</b>	<b>HBL6SS620</b>
	6	15 Ft.	White	<b>HBL6SS15</b>	<b>HBL6SS1520</b>



## SpikeShield® SPD Specifications

	15 Amp HBL6SS/HBL6HG Series	20Amp HBL6SS/HBL6HG Series
<b>Electrical Specifications</b>		
Current	15A	20A
Voltage	125V	125V
Frequency	60Hz	60Hz
Surge Component	MOV	MOV
Over Current Protection	15A CB	20A CB
2-Port USB (HBL6HGUSB6)	5V DC Type A	n/a
UL VPR	L-N 500V	L-G 600V
MCOV	150V	
Peak Current Rating L-N	30KA	
Leakage Current:	<.5mA	
EMI / RFI Noise Rejection	-11 dB to -68 dB (10kHz to 100MHZ)	
Total Joules (all modes)	1100j	

## Environmental Specifications

Operating Temperature	-40°F to 160°F (-40°C to 70°C)
-----------------------	--------------------------------

## Certifications

cULus Listed to UL1449 4th Edition  
UL File # E143272  
RoHs Compliant  
NFPA 99 2012 ed  
ANSI / IEEE Category A  
cULus Listed to UL1310 (2-Port USB)

## Physical Specifications

<b>HBLH6USB6:</b>	
Length	15.67" (398.0mm)
Width	2.22" (56.4mm)
Depth	1.78" (45.2mm)
<b>HBL6HG Series:</b>	
<b>HBL6SS Series:</b>	
Length	14.42" (366.3mm)
Width	2.22" (56.4mm)
Depth	1.70" (43.3mm)





# Heavy Duty Relocatable Power Taps for Industrial, Commercial and Retail Applications

Listed to UL1363



- Heavy-duty 18 gauge galvanized steel housing with durable powder coat finish
- Available in 15A and 20A configurations
- 6' and 15' cord length options for all models
- 15A models feature a 45° angle plug
- 20A models feature a 90° angle plug
- All models come with built in circuit breaker for over current protection
- Church-key openings on the back of the RPT for temporary mounting ease
- White powder coat RPTs feature UL Listed Hospital Grade, Tamper-Resistant Receptacles
- Black powder coat RPTs feature Specification Grade, Tamper-Resistant Receptacles



## Relocatable Power Tap with Hospital Grade Tamper-Resistant Receptacles

Description	# of Outlets	Cord Length	Color	15A 125V	20A 125V
RPT,	6	6 Ft.	White	<b>HBL6RPT6</b>	<b>HBL6RPT620</b>
Heavy Duty Metal Housing	6	15 Ft.	White	<b>HBL6RPT15</b>	<b>HBL6RPT1520</b>

## Relocatable Power Tap with Specification Grade Tamper-Resistant Receptacles

Description	# of Outlets	Cord Length	Color	Catalog Number	20A 125V
RPT,	6	6 Ft.	Black	<b>HBL6RPT6BK</b>	<b>HBL6RPT620BK</b>
Heavy Duty Metal Housing	6	15 Ft.	Black	<b>HBL6RPT15BK</b>	<b>HBL6RPT1520BK</b>



## Relocatable Power Tap Specifications

	15A	20A
<b>Electrical Specifications</b>		
Current	15A	20A
Voltage	125V	125V
Frequency	60Hz	60Hz
Over Current Protection	15A CB	20A CB

### Physical Specifications

Length	11.12" (282.4)
Width	2.22" (56.4)
Height	1.6" (40.5)

### Environmental Specifications

Operating Temperature	-40°F to 160°F (-40°C to 70°C)
-----------------------	-----------------------------------

### Certifications

cULus Listed UL1363 RPT