



DATE: _____ TYPE: _____

NAME: _____

PROJECT: _____

Compact fluorescent

P7124-68

Hard-Nox


Energy efficient, long-lasting lamps. Clear prismatic DR acrylic diffuser. Can be wall mounted. 120V NPF ballast. UL listed for damp locations.

Category: Outdoor

Finish: White

Construction: Steel construction

Glass: Clear prismatic polycarbonate

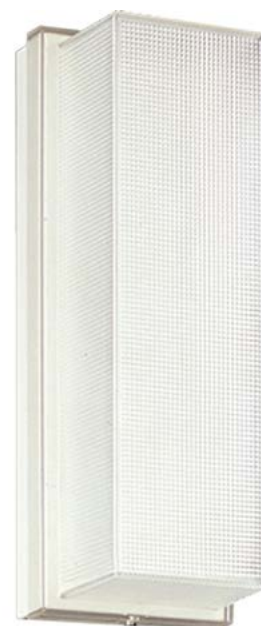

Width: 4-1/4"

Height: 12-1/4"

Depth: 4-1/4"

H/CTR: 6-1/8"

MOUNTING	ELECTRICAL	LAMPING	ADDITIONAL INFORMATION
Wall mounted Mounting slots in back plate for outlet box included Chassis covers a standard 4" hexagonal recessed outlet box	6" of wire supplied 120V HPF 120V	Quantity: 1 13W 2-pin, twin compact fluorescent GX24Q-2 socket	cCSAus Damp location listed 1 year warranty Companion fixtures are available