

One-Light Close-To-Ceiling

Wall or ceiling mounted • wall or ceiling mounted • wall or ceiling mounted •



Description:

One-light LED ceiling fixture with white acrylic diffuser and replaceable LED module in a White painted finish. Twist on installation. Wall or ceiling mount.

Specifications:

- White (-30) (painted)
- Steel construction
- White acrylic diffuser
- LED Module is replaceable (part # 93053641)
- Twist on installation.
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1211/71.2 (LM-82)
Lumens/LPW (Delivered)	710/41.5 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus ENERGY STAR® qualified

P7385-3030K9

Images:



Dimensions:

Diameter: 11"

Height: 3-1/4"

Photometrics:

P7385-3030K9

ELECTRICAL DATA		P7385-3030K9
Input Voltage		120 V
Input Frequency		60 Hz
Input Current		0.142 A
Input Power		17
Power Factor		Greater than 0.90
THD		<20%
FCC		Meets FCC Title 47, Part 15 Class B
Operating Temperature		-30 °C to 30 °C
Dimming		Yes*

*See Dimming Notes for more information

P7385-3030K9


LED Light Engine: 3000 K 90 CRI

System Wattage: 17

Fixture delivered lumens: 710

Fixture Efficacy: 41.5

Spacing Criteria: 1.3

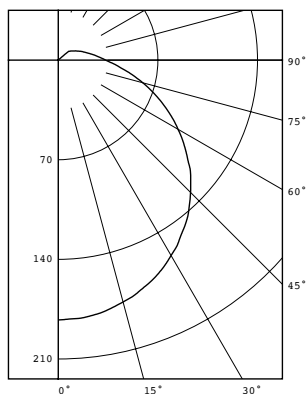

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	183	
5	182	17
15	176	50
25	166	76
35	150	94
45	132	102
55	109	98
65	85	84
75	62	65
85	41	45
90	34	
95	28	31
105	20	22
115	15	15
125	11	10
135	0	1
145	0	0
155	0	0
165	0	0
175	0	0
180	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	143	20.2
0-40	238	33.5
0-60	437	61.5
0-90	632	88.9
90-120	68	9.5
90-130	78	11.0
90-150	79	11.1
90-180	79	11.1
0-180	710	100.0

Test 15.00948 Test Date 06/02/15

P7385-3030K9

Dimming Notes:

P7385 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Nova T NTELV-300

Lutron Vienti VTELV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.