
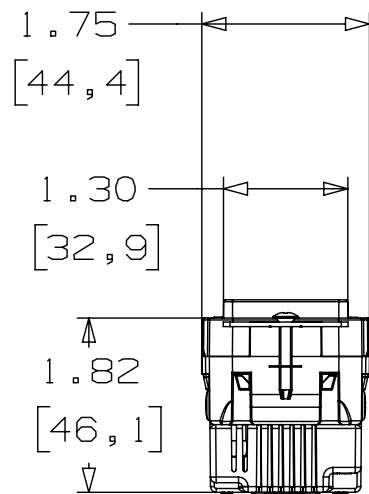
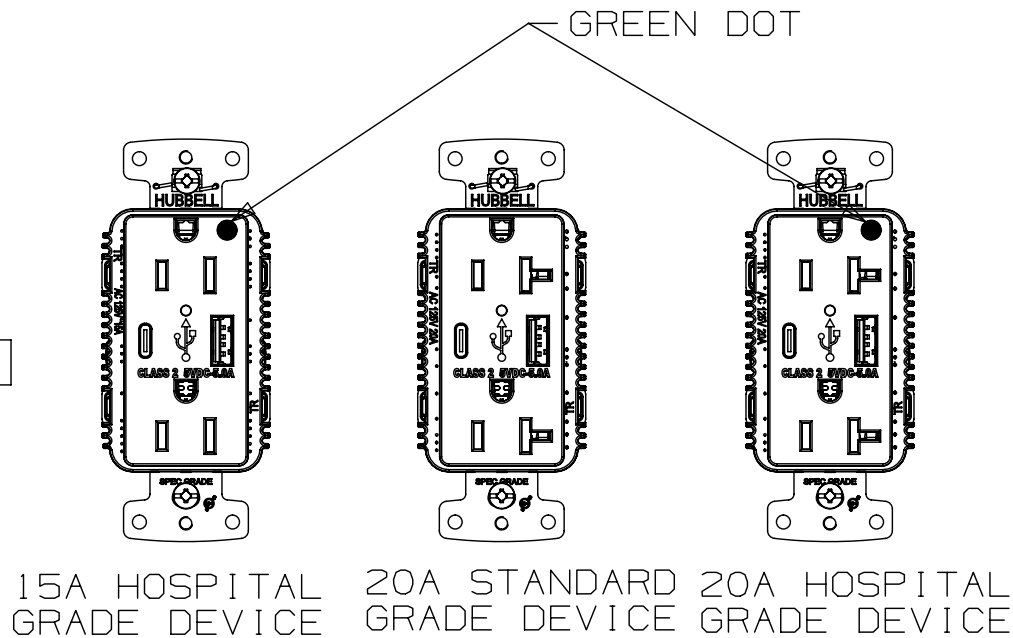
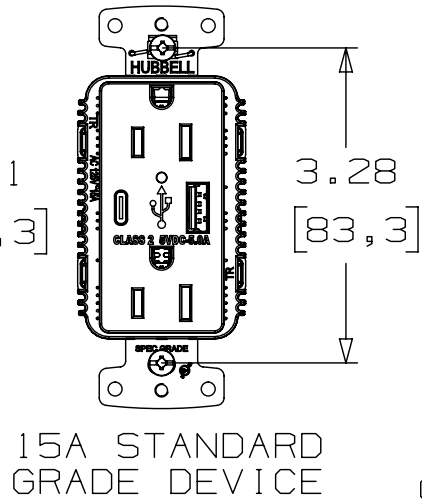
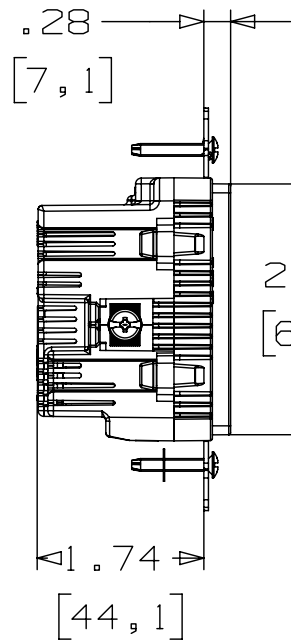


M13051 3

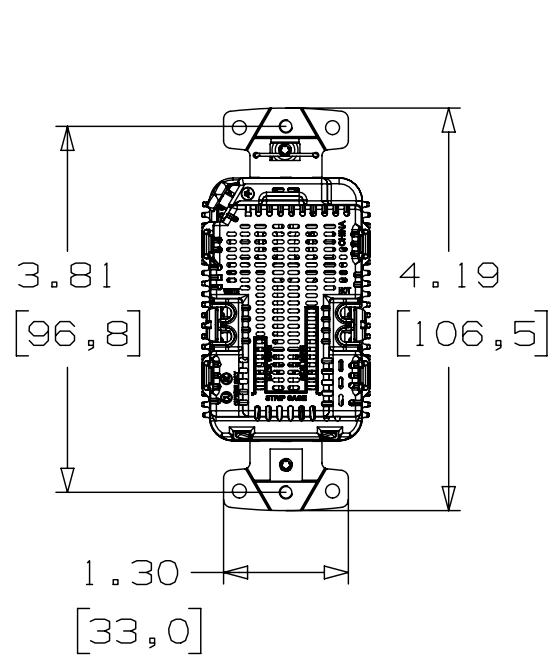

NOTES:
1. ALL DIMENSIONS ARE IN INCHES [mm].
2. RATING/TYPE:
RECEPTACLE: SEE TABLE.
USB PORT: (1) TYPE A & (1) TYPE C
USB PORT CHARGER OUTPUT: 5VDC 5.0A MAX.

CATALOG	COLOR	DESCRIPTION	RATING
USB15AC5	BROWN	15Amp 125VAC DUPLEX TR RECEPTACLE W/ USB 5A 5VDC TYPE A & C CHARGING PORTS	15A 125VAC
USB15AC5I	IVORY		
USB15AC5W	WHITE		
USB15AC5LA	LIGHT ALMOND		
USB15AC5GY	GRAY		
USB15AC5BK	BLACK		
USB15AC5R	RED		
USB8200AC5	BROWN	15Amp 125VAC HOSPITAL GRADE DUPLEX TR RECEPTACLE W/ USB 5A 5VDC TYPE A & C CHARGING PORTS	15A 125VAC
USB8200AC5I	IVORY		
USB8200AC5W	WHITE		
USB8200AC5LA	LIGHT ALMOND		
USB8200AC5GY	GRAY		
USB8200AC5BK	BLACK		
USB8200AC5R	RED		
USB20AC5	BROWN	20Amp 125VAC DUPLEX TR RECEPTACLE W/ USB 5A 5VDC TYPE A & C CHARGING PORTS	20A 125VAC
USB20AC5I	IVORY		
USB20AC5W	WHITE		
USB20AC5LA	LIGHT ALMOND		
USB20AC5GY	GRAY		
USB20AC5BK	BLACK		
USB20AC5R	RED		
USB8300AC5	BROWN	20Amp 125VAC HOSPITAL GRADE DUPLEX TR RECEPTACLE W/ USB 5A 5VDC TYPE A & C CHARGING PORTS	20A 125VAC
USB8300AC5I	IVORY		
USB8300AC5W	WHITE		
USB8300AC5LA	LIGHT ALMOND		
USB8300AC5GY	GRAY		
USB8300AC5BK	BLACK		
USB8300AC5R	RED		


LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
COVER	THERMOPLASTIC	COLOR PER CAT.#
BASE	THERMOPLASTIC	BLACK
TR SHUTTER	THERMOPLASTIC	
STRAP	GALV. STEEL	
MOUNTING SCREW	STEEL	ZN PLATE
TERMINALS	COPPER ALLOY	
GROUND SCREW	STEEL	ZN PLATE + GREEN DYE
TERMINAL SCREW (HOT)	STEEL	BRASS PLATE
TERMINAL SCREW (NEUTRAL)	STEEL	NICKEL PLATE

3	IN SHEET 2 UPDATED STRAP MATERIAL. PER DCN #23481	EMD	12/7/17
2	ADDED SHEET 2.WR RECEPTACLES. PER DCN #23398	EMD	11/7/17
1	NEW RELEASE PER DCN #21591.	D.LI	5/13/16
SYM	REVISIONS	APP	DATE


THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE			
TITLE HUBBELL TR DUPLEX RECEPTACLE W/ 5AMP TYPE A & C USB CHARGER			
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.01 .XXX = ±.005 ANGLES = ±2°	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT		
	DR. BY	NH	APP. BY SM
	TR. BY	DL	SCALE 1:2
	CHK. BY		DATE 6/30/15

M13051	3
--------	---

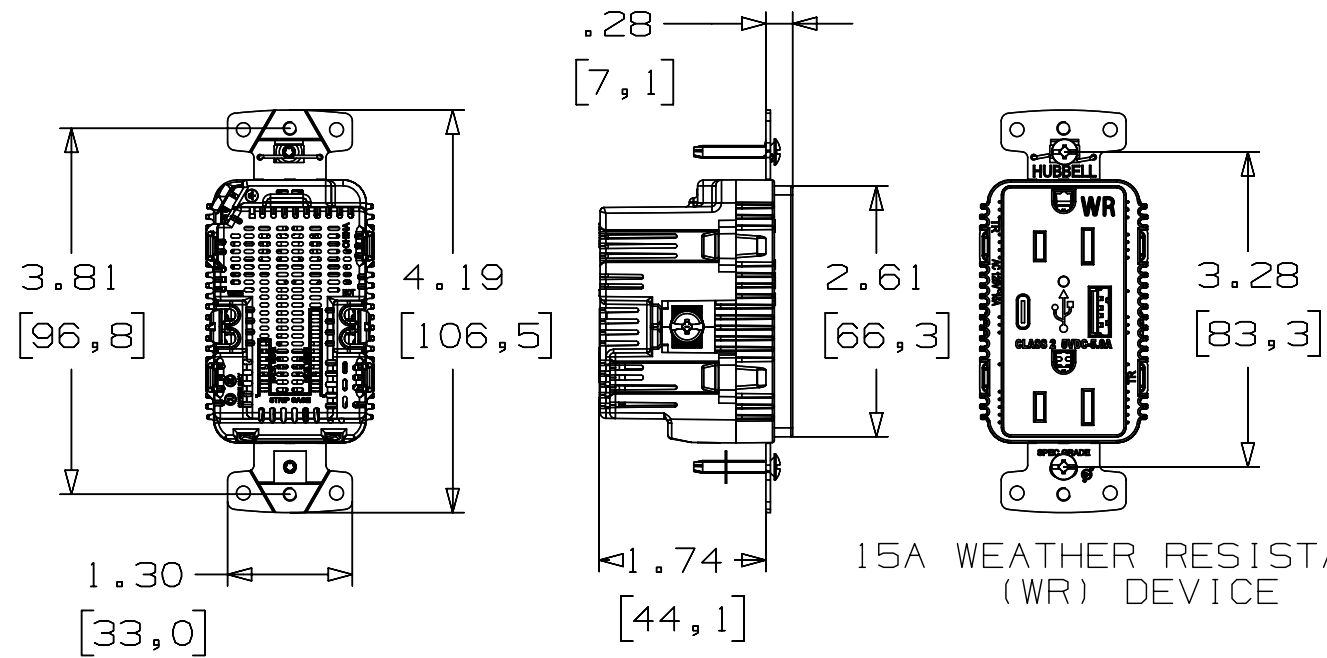

15A WEATHER RESISTANT
(WR) DEVICE

20A WEATHER RESISTANT
(WR) DEVICE

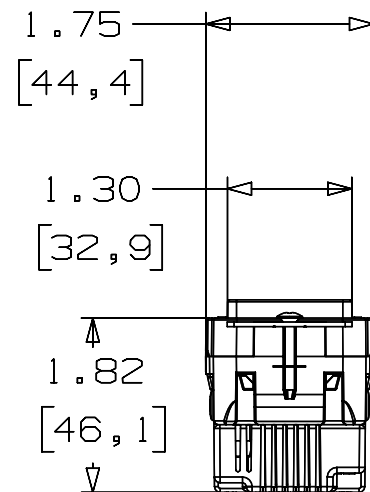

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [mm].
2. RATING/TYPE:
RECEPTACLE: SEE TABLE.
USB PORT: (1) TYPE A & (1) TYPE C
USB PORT CHARGER OUTPUT: 5VDC 5.0A MAX.

CATALOG	COLOR	DESCRIPTION	RATING
USB15AC5WR	BROWN	15Amp 125VAC DUPLEX WRTR RECEPTACLE W/ USB 5A 5VDC TYPE A & C CHARGING PORTS	15A 125VAC
USB15AC5IWR	IVORY		
USB15AC5WWR	WHITE		
USB15AC5LAWR	LIGHT ALMOND		
USB15AC5GYWR	GRAY		
USB15AC5BKWR	BLACK		
USB15AC5RWR	RED		
USB20AC5WR	BROWN	20Amp 125VAC DUPLEX WRTR RECEPTACLE W/ USB 5A 5VDC TYPE A & C CHARGING PORTS	20A 125VAC
USB20AC5IWR	IVORY		
USB20AC5WWR	WHITE		
USB20AC5LAWR	LIGHT ALMOND		
USB20AC5GYWR	GRAY		
USB20AC5BKWR	BLACK		
USB20AC5RWR	RED		

[illegible]

3	IN SHEET 2 UPDATED STRAP MATERIAL. PER DCN #23481	EMD	12/7/17
2	ADDED SHEET 2.WR RECEPTACLES. PER DCN #23398	EMD	11/7/17
1	NEW RELEASE PER DCN #21591.	D.LI	5/13/16
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE		
TITLE HUBBELL TR DUPLEX RECEPTACLE W/ 5AMP TYPE A & C USB CHARGER		
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX $\pm .01$.XXX $\pm .005$ ANGLES $\pm 2^{\circ}$	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
	DR. BY NH	APP. BY SM
	TR. BY DL	SCALE 1:2
	CHK. BY	DATE 6/30/15

DIMENSION SHEET FOR CAT. NO.

SEE TABLE

REPAIRABLE ☐NON-REPAIRABLE ☒

W

CODE 74545