

# Switched Disconnects and Enclosures

## NEMA 1 Disconnect Switches

### Housing Design

- Thermoplastic cover on a plated steel base
- Durable, non-conductive cover
- Wiring conduit knockouts
- 1/2" and 3/4" NPT
- Top, bottom or back wire entry points
- Surface mount control
- Switch can be locked in the OFF position as a method of compliance with OSHA lockout/tagout



### Housing Design

- All aluminum cover and base
- Base is pre-drilled for rear surface mounting
- Wiring conduit knockouts
- 1/2" and 3/4" NPT
- Top, bottom or back wire entry points
- Surface mount control
- Switch can be locked in the OFF position as a method of compliance with OSHA lockout/tagout



HBL1389D



HBL1379D



HBL1390



HBL1370

### Circuit-Lock® NEMA 1 Enclosures with Switch

Ideal for use in industrial environments, i.e. conveyer systems, industrial fans, etc.

Amp	Poles	Enclosure Material	HP Rating				Catalog Number
			120V AC 1Ø	240V AC 3Ø	480V AC 3Ø	600V AC 3Ø	
30	2	Thermoplastic	2	5	10	15	<b>HBL1392D</b>
30	3	Thermoplastic	3	7.5	15	20	<b>HBL1389D</b>
30	2	Aluminum	2	5	10	15	<b>HBL1372D</b>
30	3	Aluminum	3	7.5	15	20	<b>HBL1379D</b>

Note: See page F-21 for technical information.


### Circuit-Lock® NEMA 1 Enclosures without Switch

For use with switches shown on page F-21.


Description	Cover Material	Base Material	No. Equipment Grounds	Catalog Number
For use with 30A switch.	Thermoplastic	Steel	1	<b>HBL1390</b>
For use with 30A switch.	Aluminum	Aluminum	2	<b>HBL1370</b>

## Dimensions

### HBL1370, HBL1372D and HBL1379D

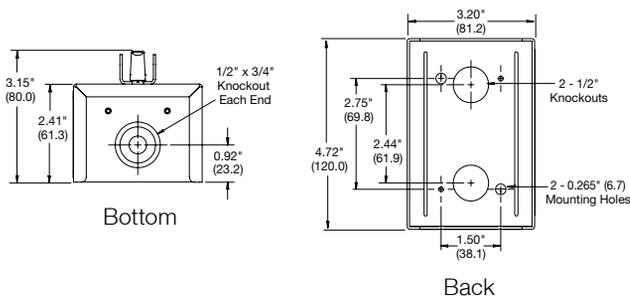

### HBL1390, HBL1389D and HBL1392D

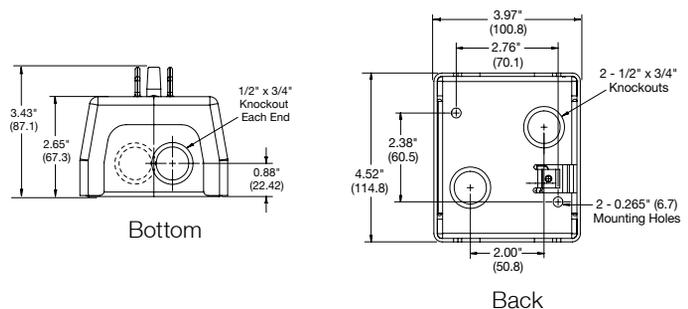

Dimensions in Inches (mm)