tradeSELECT® Products



Special Use Products





Description

Special Use Products



Tamper-Resistant



Tamper-Resistant

RR151CHWTR



| Clock Hanger/Recessed Single Receptacle, Tamper-Resistant, 2 pole, 3 wire, grounding, side wire terminations | Brass Stainless Steel Ivory (Nylon) White (Nylon) | RR151CHBSTR RR151CHSSTR RR151CHITR RR151CHWTR | RR201CHBSTR RR201CHSSTR RR201CHITR RR201CHWTR |
|--|--|---|---|
| Recessed Duplex Receptacle, Tamper-Resistant, 2 pole, 3 wire, grounding, side wire terminations | lvory Light Almond White | RR1510I RR1510LA RR1510W | _ _ _ |
| JLOAD® Multimedia Outlet, Provides power, Cat. 5e and coaxial in a single gang box. Requires RJ600 Box. Includes decorator frame, one Cat. 5e, one F-connector and one power receptacle 125V with voltage dividers*. | Black Gray Ivory Light Almond White | RJ650BKTR RJ650GYTR RJ650ITR RJ650LATR RJ650WTR | RJ620BKTR RJ620GYTR RJ620ITR RJ620LATR RJ620WTR |
| JLOAD® Multimedia Outlet, Includes decorator frame with two open ports for custom configuration and one power receptacle 125V with voltage dividers*. | Black Gray Ivory Light Almond White | RJ65BKTR RJ65GYTR RJ65ITR RJ65LATR RJ65WTR | RJ62BKTR RJ62GYTR RJ62ITR RJ62LATR RJ62WTR |
| JLOAD® Multimedia Box, 3 inches deep with seven ½-inch knockouts, non-metallic sheathed cable clamps on each side. Screw in mounting to stud. | Steel | RJ600 | RJ600 |

Color



RJ650BKTR


Note: *Dividers provided for use with the RJ600, RF515 series and RU200 series boxes. RF408 required for use with the RF400 series floor boxes. See page Z-10 for snap fit inserts.

See pages Z-21 to Z-26 for floor boxes and under cabinet power distribution options.

See page Tech-10 for Tamper-Resistant description.



Dividers



RJ600




RDS50

Door Switch with Cover Plate and Box

| Description | "ON" when Door is Open | "OFF" when Door is Open |
|-------------------|------------------------|-------------------------|
| Rating | 3A 125V AC | 3A 125V AC |
| Zinc Plated Steel | RDS50* | RDS30* |

Note: *Not UL Listed.

Dimensions

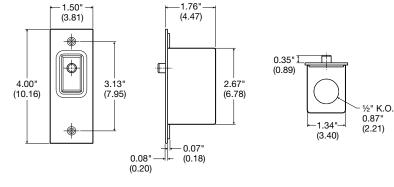



RS100W



In-Line Cord Switches

| IJ. | Description | Mini For Use with Flat Lamp Cord | Heavy Duty |
|-----|----------------|----------------------------------|-----------------------------------|
| | Rating | 6A 125V AC | 6A 125V AC, 1/6 HP |
| | Wire | #18 AWG SPT 1 and SPT 2 | #18 to #16 AWG SPT 1 and SPT 2 |
| | lvory White | _ RS100W | RS101I RS101W |

Dimensions in Inches (mm)