

Straight Blade Devices  
20A 125V, 5-20R, Red, USA.  
Hospital Grade SNAPConnect® Receptacle

Features

- Requires minimal box space
- Self-grounding clip makes installation ease
- One-piece nickel-plated brass integral ground strap

Ordering Information

Description	Device Color	UPC Number	Catalog Number
Standard Duplex	Red	783585540733	SNAP8300RNA

Listings

UL Listed to UL498 File No. E2551  
Certified to CSA, C22.2, No. 42 File 650  
Fed. Spec. W-C-961  
NEMA® WD-6 Compliant


Specifications

Face	Nylon
Base	PBT
Power Contacts	Brass
Ground Contacts	Brass
Mounting Strap	Brass
Automatic Self-Grounding Clip	Stainless Steel
Mounting Screws	Zinc plated steel

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL 94V-2
Operating Temperature	Maximum continuous 75°C; minimum -40°C (without impact)

HUBBELL

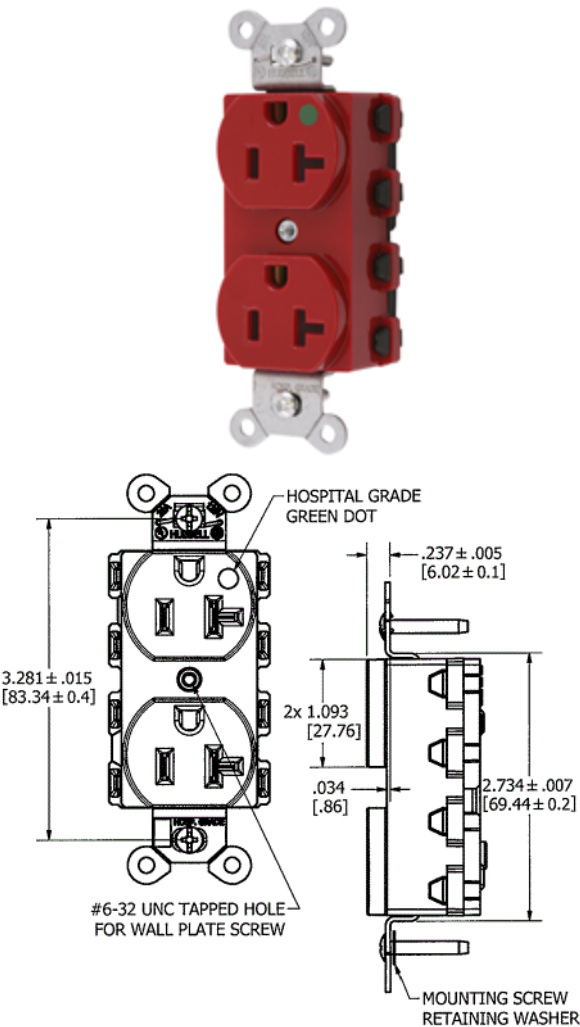

Complementary Products

Wallplate or Weatherproof Cover  
Opening

Online Resources

Customer Sales Drawing  
eCatalog  
Installation Instructions

