

MIDGET TWIST-LOCK® VALISE® DEAD FRONT PLUG OR CONNECTOR BODY

Installation Instructions

GENERAL INFORMATION

CAUTION: RISK OF ELECTRIC SHOCK.

- DISCONNECT ELECTRICAL POWER BEFORE INSTALLATION OR MAINTENANCE.
- NEVER WIRE ENERGIZED ELECTRICAL COMPONENTS.

CAUTION: USE COPPER CONDUCTORS ONLY.

NOTICE:

- FOR INSTALLATION BY A QUALIFIED PERSON IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES.
- CHECK THAT THE DEVICE TYPE AND RATING IS SUITABLE FOR THE APPLICATION PRIOR TO INSTALLATION.

15A 125/ 250 V.A.C.

3 POLE 3 WIRE NEMA ML-3P OR ML-3R



WIRING INFORMATION

VALISE CORD GRIPPING RANGE: 18/3 SV – 14/3 SJ (.230 - .421)


SELECT PROPER WIRE SIZE & TYPE FOR LOAD & APPLICATION. REFER TO N.E.C

CUT CORD ONLY, AS SHOWN.

(ACTUAL SIZE) MAY BE USED AS CUTTING GAGE
DO NOT STRIP CONDUCTORS

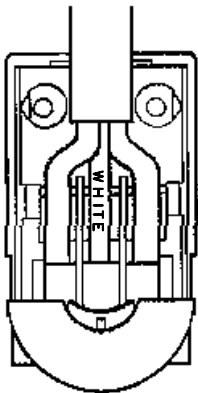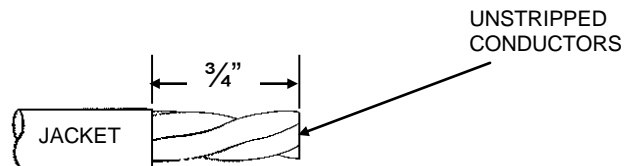

FORM UNSTRIPPED CONDUCTORS AS SHOWN AND LOCATE THE PROPER CONDUCTOR BETWEEN SLOT IN THE TERMINAL.
PLACE WHITE CONDUCTOR AT WHITE (NEUTRAL) CENTER TERMINAL AND THE OTHER CONDUCTORS AT EITHER (HOT) TERMINALS MARKED "X" & "Y".

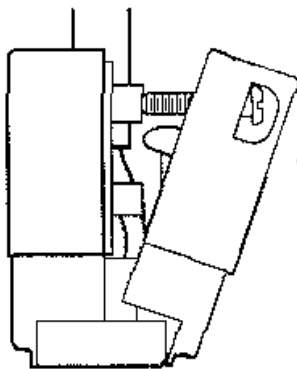

CLOSE OPEN SIDE. INSURE THAT CONDUCTORS REMAIN LOCATED IN PLACE BETWEEN SLOTS OF TERMINALS AND TIGHTEN SCREWS EVENLY UNTIL THE SIDE IS FULLY CLOSED.