

20 Amp, 125 Volts



HBL23035B

IP30
SUITABILITY



20A 125V

Plug

| Description | Cord Dia. | Catalog Number |
|------------------------------------|----------------------------|------------------|
| Nylon housing, thermoset interior. | .320"-.660" (8.12-16.5) | HBL23035B |




HBL23032B



20A 125V

Connector Body

| Description | Cord Dia. | Catalog Number |
|------------------------------------|----------------------------|------------------|
| Nylon housing, thermoset interior. | .320"-.660" (8.12-16.5) | HBL23032B |

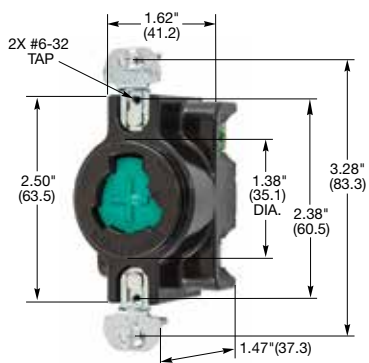

HBL23030



20A 125V

Receptacle

| Description | Catalog Number |
|-----------------------------|-----------------|
| Black phenolic, back wired. | HBL23030 |

Note: Devices listed above are not interchangeable with any other Hubbell device listed in this catalog.



HBL7423WO



HBL23007

Accessories

Weatherproof Covers

| Description | Catalog Number |
|--|--------------------|
| Gray polycarbonate for FS/FD box mounting, corrosion resistant. IP44 SUITABILITY. | HBL7423WO |
| Same as above except yellow. | HBL74CM23WO |
| Cast aluminum, lift cover for indoor use only. | HBL23007 |
| Stainless steel 302/304, single receptacle wallplate. | SS7 |
| Stainless steel 430, single receptacle wallplate. | SS7L |

Dimensions in Inches (mm)