

Straight Blade Devices  
20A, 125V, 2 Pole, 3 Wire Grounding  
Hubbell-Pro™ Heavy Duty Duplex  
Receptacles

Features

- Slender/compact design
- Finder Groove Face
- Triple wipe contacts

Ordering Information

| Description         | Device Color | UPC          | Catalog Number |
|---------------------|--------------|--------------|----------------|
| Back and side wired | Red          | 783585127774 | 5362R          |

Listings

UL Listed to UL498 File No. E2186  
Certified to CSA 22.2, No. 42  
Fed. Spec. W-C-596  
NEMA® WD-6 Compliant


Specifications

|                                 |                   |
|---------------------------------|-------------------|
| Face                            | Nylon             |
| Base                            | PBT               |
| Contacts                        | Brass             |
| Mounting Strap                  | Galvanized steel  |
| Automatic Self-grounding Staple | Stainless steel   |
| Mounting Screws                 | Zinc plated steel |

Performance

|                         |                                                          |
|-------------------------|----------------------------------------------------------|
| <b>Electrical</b>       |                                                          |
| Current Interrupting    | Certified for current interrupting at full rated current |
| Dielectric Voltage      | Withstands 2,000V minimum                                |
| <b>Mechanical</b>       |                                                          |
| Product Identification  | Ratings are a permanent part of the device               |
| Terminal Accommodation  | #12-#10 AWG copper stranded or solid conductor only      |
| Terminal Identification | Terminal wire leads identified in accordance with UL 498 |
| <b>Environmental</b>    |                                                          |
| Flammability            | UL 94 V-2                                                |
| Operating Temperatures  | Maximum continuous 75°C; minimum -40°C (w/o impact)      |

HUBBELL

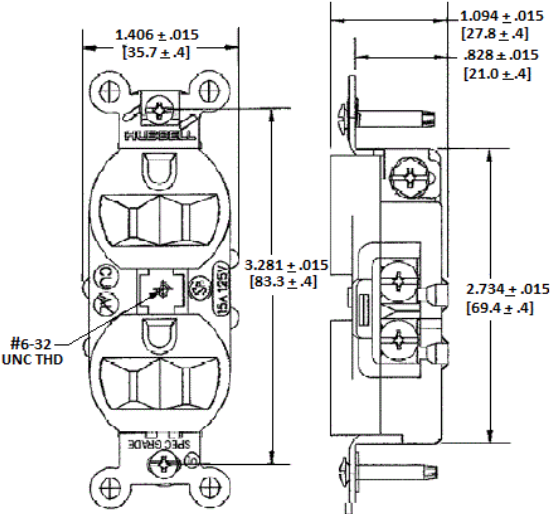

Accessories

Wallplate or Weatherproof Cover Duplex Opening

Resources

Customer Use Drawing  
eCatalog

