



15 Amp Countertop Receptacles

Description	Finish	Color/Material	Surface Mount	Flush Mount
15A 125V Tamper-Resistant Pop-Up Kitchen Counter Receptacle, Rated for 20A circuits	Brushed	Aluminum Brass Nickel	RCT200ALU RCT200BR RCT200NI	RCT201ALU RCT201BR RCT201NI
	Polished	Chrome	RCT200CH	RCT201CH
	Powder Coated	Bronze Matte	RCT200BZE	RCT201BZE
		Black Matte	RCT200BK	RCT201BK
		White Matte	RCT200W	RCT201W

20 Amp Countertop Receptacles

Description	Finish	Color/Material	Surface Mount	Flush Mount
20A 125V Tamper-Resistant Pop-Up Kitchen Counter Receptacle.	Brushed	Aluminum Brass Nickel	RCT220ALU RCT220BR RCT220NI	RCT221ALU RCT221BR RCT221NI
	Polished	Chrome	RCT220CH	RCT221CH
	Powder Coated	Bronze Matte	RCT220BZE	RCT221BZE
		Black Matte	RCT220BK	RCT221BK
		White Matte	RCT220W	RCT221W



RCT200BK




RCT221ALU





Specifications

Performance	Materials
Configuration	15/20 amp 125 volt, tamper-resistant receptacle
Circuit Rating	20 amp non-feed through
Listings	cULus Listed to UL498, Section 145 Mechanical Load Test, 146 Spill Test
Dielectric Voltage	Withstands 2,000V minimum
Terminal Accommodation	#14-#12 AWG copper stranded or solid conductor only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
Flammability	UL 94V-2
Operating Temperature	Maximum continuous 75°C, minimum -40°C (w/o impact)
	Cover and Flange Die cast aluminum
	Main Body Engineered thermoplastic PBT
	Wiring Chamber Die cast aluminum
	Water Seals Elastomers and silicon

Product Dimensions Inches (mm)

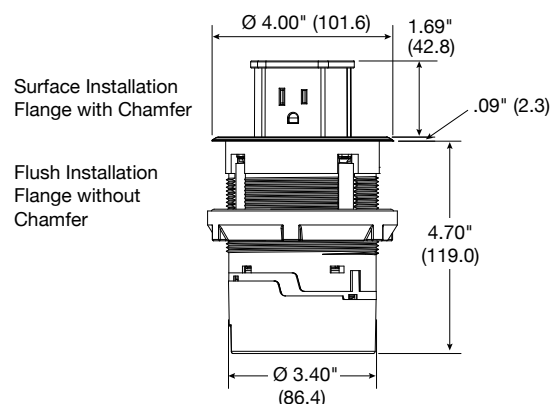

Accepts non-metallic sheathed cable and/or metal conduit (by using wire clamp or 1/2" KO)

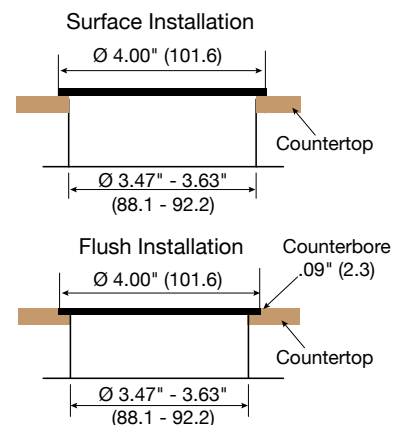

Note: Recommended to be fed by a GFCI circuit, up to 20 Amp Service.