

## Features and Benefits

### Industrial Power Cord Reels

- Durable, corrosion resistant steel construction design with yellow or white powder coat finish
- Multi-position guide arm
- Positive-latch mechanism automatically maintains desired cord length
- 12 AWG cord for greater current carrying capacity
- Plug-in 5 ft. long power cord requires no electrical wiring



HBL45123TL20

### Industrial Power Cord Reels

Cord End	Cable Feet (m)	Cable Type	NEMA Style	Amps	Volts AC	Weight Lbs. (kg)	Catalog Number
Without cord ends.	50 (15.2)	#16/3 SJ	—	10	125	20 (9.1)	<b>HBL50163</b>
Without cord ends.	45 (13.7)	#12/3 SJ	—	20	125	21 (9.5)	<b>HBL45123</b>
HBL5269C connector.	45 (13.7)	#12/3 SJ	5-15R	15	125	28 (12.7)	<b>HBL45123C</b>
HBL5369C connector.	45 (13.7)	#12/3 SJ	5-20R	20	125	28 (12.7)	<b>HBL45123C20</b>
Same as above with white reel housing.							<b>HBL45123C20W</b>
HBL2313 connector.	45 (13.7)	#12/3 SJ	L5-20R	20	125	28 (12.7)	<b>HBL45123TL20</b>
Same as above with white reel housing.							<b>HBL45123TL20W</b>
Portable outlet box with (1) gray duplex receptacle.	45 (13.7)	#12/3 SJ	5-15R	15	125	29 (13.2)	<b>HBL45123R</b>
Same as above except white.	45 (13.7)	#12/3 SJ	5-20R	20	125	29 (13.2)	<b>HBL45123R20</b>
							<b>HBL45123R20W</b>
Black portable outlet box with (1) gray duplex receptacle.	45 (13.7)	#12/3 SJ	5-20R	20	125	29 (13.2)	<b>HBL45123R20WM1</b>
Portable outlet box with (2) gray duplex receptacles.	45 (13.7)	#12/3 SJ	5-20R	20	125	29 (13.2)	<b>HBL45123R220</b>
Same as above except white.							<b>HBL45123R220W</b>
Black portable outlet box with (2) gray duplex receptacles, white reel housing.	45 (13.7)	#12/3 SJ	5-20R	20	125	29 (13.2)	<b>HBL45123R220WM1</b>
Portable outlet box with (1) ground fault protected gray duplex receptacle.	45 (13.7)	#12/3 SJ	5-15R	15	125	29 (13.2)	<b>HBL45123GF15</b>
Same as above, with white reel housing.	45 (13.7)	#12/3 SJ	5-20R	20	125	29 (13.2)	<b>HBL45123GF20</b>
							<b>HBL45123GF20W</b>
Black portable outlet box with (2) ground fault protected gray duplex receptacles, white reel housing.	45 (13.7)	#12/3 SJ	5-20R	20	125	25 (11.3)	<b>HBL45123GF220WM1</b>


Note: 15 Amp: Supplied with 5 ft. power supply cord with HBL5266C, 15A straight blade plug. 20 Amp: Supplied with 5 ft. power supply cord with HBL5366C, 20A straight blade plug. Ground fault protected reels supplied with (1) GFM20 and (1) HBLP26FS.

### Accessories

Description	Weight Lbs. (kg)	Catalog Number
Pivot base 340° rotation fits all industrial models.	5 (2.3)	<b>HBL340PB</b>
Replacement stop.	.2 (.09)	<b>HBL12BS</b>

### Dimensions

Inch (mm)	A	B	C	D	E	F
	13.00" (330)	12.38" (314)	8.00" (203)	2.50" (64)	9.75" (248)	1.25" (32)

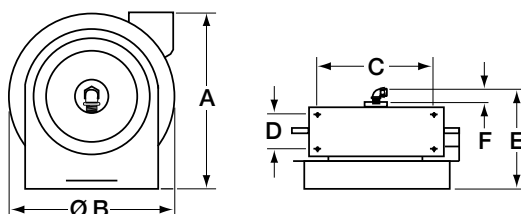

Note: All models have four .625" (15.9) diameter mounting holes.

### Listing/Certification

UL 355  
CSA C22.2 No. 21.

### Environment

Dry, indoor, non-hazardous locations.

### Mounting Positions

Wall mount.  
Ceiling mount.  
Bench mount.



HBL45123C



HBL45123TL20



HBL45123R



HBL45123R20WM1



HBL45123GF15



HBL45123GF20WM1



HBL340PB

Dimensions in Inches (mm)