Kellems® Wire Management Products

Wire Rope Splicing Grips

Splicing Grips

HUBBELL

Features

- Galvanized steel meshs contructed in triple, double and single weave
- Non-rotating barrel

Ordering Information

Description	Cable Diameter Range Inches(cm)	UPC	Catalog Number
Non -rotating Wire Rope Grips, Triple, Double and Single Weave	9/16"- 5/8" (1.43-1.59)	783585317168	03316001

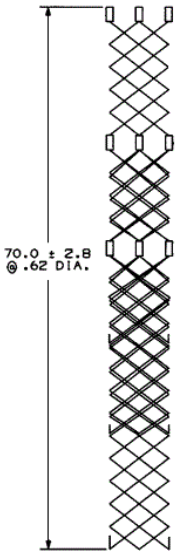

Listings

CSA Certified

Specifications

Strand	Galvanized Steel
Strand Tabs	Copper
Fastener	Plastic
Tag	Mylar

Performance

Mechanical

Approximate Breaking Strength	7,500 (33,360)
Approximate Strength of Grip per Foot	5.75 (1.75)
Working Load	(program formula 5% of Approximate Breaking Strength)

Online Resources

Customer Use Drawing
eCatalog
Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484
Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

HUBBELL®
Wiring Device-Kellems