

Straight Blade Devices  
20A, 125V, 2 Pole, 3 Wire Grounding  
Commercial Specification Grade Style  
Line® Decorator Duplex Receptacles

Features

- Aesthetic Style Line® decorator design
- Smooth face
- Triple wipe contacts

Ordering Information

| Description                                             | Device Color | UPC          | Catalog Number |
|---------------------------------------------------------|--------------|--------------|----------------|
| Smooth face, Style Line® decorator, back and side wired | Black        | 783585127910 | DR20BLK        |

Listings

UL Listed to UL498 File No. E2186  
Certified to CSA, C22.2, No. 42  
Fed. Spec. W-C-596  
NEMA® WD-6 Compliant


Specifications

|                                 |                                    |
|---------------------------------|------------------------------------|
| Face                            | Nylon                              |
| Base                            | Nylon                              |
| Power Contacts                  | .030 in. (.8) Brass                |
| Ground Contacts                 | Brass                              |
| Wire Clamp                      | .062 in. (1.6) Nickel plated steel |
| Terminal Screws                 | Plated steel                       |
| Mounting Strap                  | .040 in. (1) Galvanized steel      |
| Automatic Self-grounding Staple | Stainless steel                    |
| Mounting Screws                 | Galvanized Steel                   |

Performance

|                         |                                                          |
|-------------------------|----------------------------------------------------------|
| <b>Electrical</b>       |                                                          |
| Current Interrupting    | Certified for current interrupting at full rated current |
| Dielectric Voltage      | Withstands 2,000V minimum                                |
| <b>Mechanical</b>       |                                                          |
| Product Identification  | Ratings are a permanent part of the device               |
| Terminal Accommodation  | #12-#10 AWG copper stranded or solid conductor only      |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA   |
| <b>Environmental</b>    |                                                          |
| Flammability            | UL 94 V-2                                                |
| Operating Temperatures  | Maximum continuous 75°C; minimum -40°C (w/o impact)      |

HUBBELL

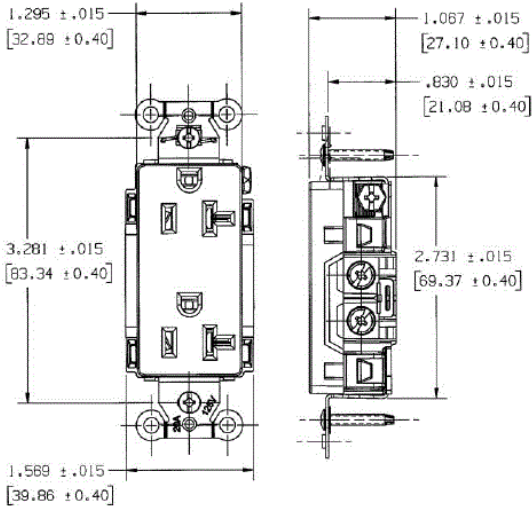

Accessories

Wallplate or Weatherproof Cover StyleLine® Decorator Opening

Resources

Customer Use Drawing  
eCatalog

