
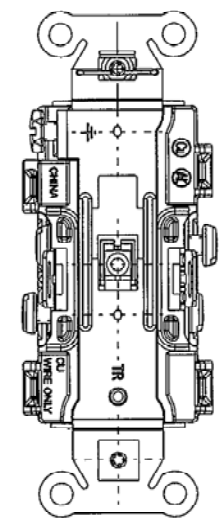
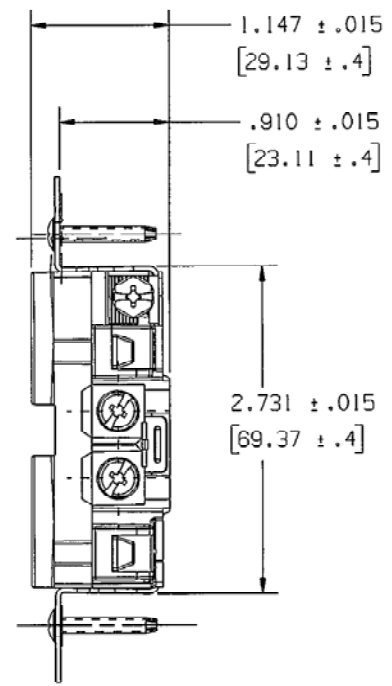


M-10512 2

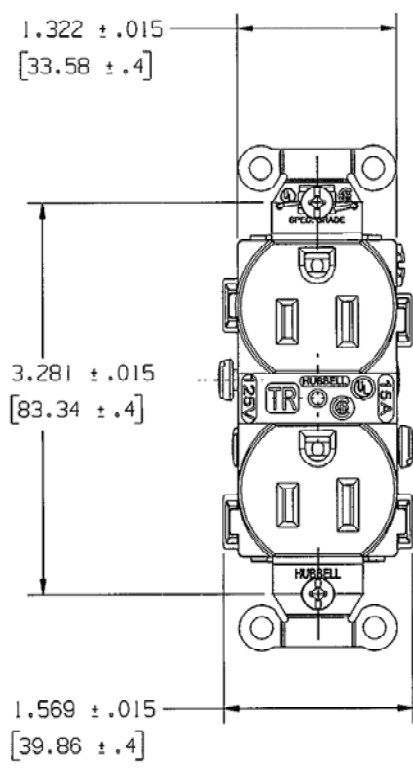

NOTES:
 1) DIMENSIONS ARE IN INCHES (MM).
 2) ALL DEVICES UL LISTED AND CSA CERTIFIED.
 3) TERMINALS ACCOMMODATE #14-#10 AWG COPPER WIRE ONLY.

CATALOG NUMBERS											
	BROWN	IVORY	GRAY	WHITE	BLACK	ALMOND	BLUE	LIGHT ALMOND	RED	ORANGE	OFFICE WHITE
HUBBELL	CR15TR	CR151TR	CR15GRYTR	CR15WH1TR	CR15BLKTR	CR15ALTR	CR15BLTR	CR15LATR	CR15RTR	-----	-----

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
TOP	NYLON 6/6	SPI A-3
BASE	NYLON 6/6	SPI A-3
LINE CONTACTS	BRASS	
GROUND CONTACTS	BRASS	
CONTACT SCREW (NEU)	STEEL	NI PLT
CONTACT SCREW (HOT)	STEEL	
BRIDGE	.04 GALV STL	
GROUND SCREW	STEEL	GREEN
STAPLE	S.S.	
WASHER	PVC FILM	BLACK
MOUNTING SCREW	STEEL	ZINC PLT

2	ADDED CAT NOS. CR15BLTR & CR15RTR TO TABLE. PER DCN 19208 DDL	DJP	11/16/12
1	RELEASED PER DCN# 14341 WRV		12/21/07
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE		HUBBELL 15A 125V, 2P 3W, TAMPER RESISTANT SMOOTH FACE DUPLEX RECEPT. SIDE WIRE ONLY	
TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRING DEVICE-KELLEMS HUDELL INCORPORATED SHELTON, CT	
.XX : ± .01	OR. BY WRV	APP. BY	
.XXX : ± .005	TR. BY	SCALE	1:1
ANGLES : ± 2°	CHK. BY	DATE	3/07

DIMENSION SHEET FOR CAT. NO. M-10512 2

REPAIRABLE ☐ NON-REPAIRABLE ☐ B