

Straight Blade Devices
15A, 125V, 2 Pole, 3 Wire Grounding
Commercial Specification Grade Duplex
Receptacles

Features

- Tamper-resistant shutter complies with national electrical code requirements
- Smooth face
- Triple wipe contacts

Ordering Information

| Description | Device Color | UPC | Catalog Number |
|--|--------------|--------------|----------------|
| Tamper-Resistant, smooth face, side wired only | White | 783585144238 | CR15WHITR |

Listings

UL Listed to UL498 File No. E2186
Certified to CSA, C22.2, No. 42
NEMA® WD-6 Compliant


Specifications

| | |
|---------------------------------|-------------------------------|
| Face | Nylon |
| Base | Nylon |
| Power Contacts | .030 in. (.8) Brass |
| Mounting Strap | .040 in. (1) Galvanized steel |
| Terminal Screws | Plated steel |
| Automatic Self-grounding Staple | Stainless steel |
| Mounting Screws | Galvanized steel |

Performance

| | |
|-------------------------|--|
| Electrical | |
| Current Interrupting | Certified for current interrupting at full rated current |
| Dielectric Voltage | Withstands 2,000V minimum |
| Mechanical | |
| Product Identification | Ratings are a permanent part of the device |
| Terminal Accommodation | #14-#10 AWG copper stranded or solid conductor only |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA |
| Environmental | |
| Flammability | UL 94 V-2 |
| Operating Temperatures | Maximum continuous 75°C; minimum -40°C (w/o impact) |

HUBBELL

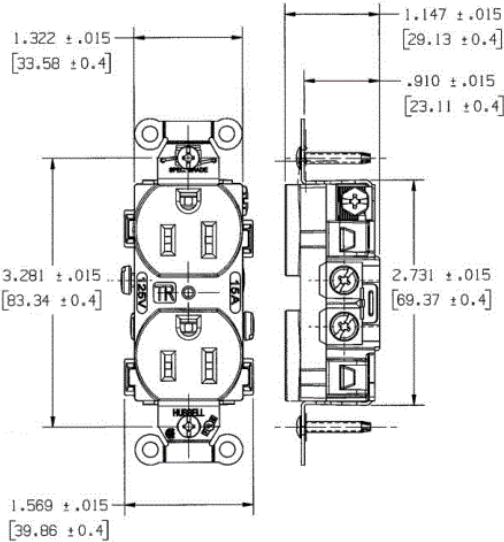

Accessories

Wallplate or Weatherproof Cover Duplex Opening

Resources

Customer Use Drawing
eCatalog

