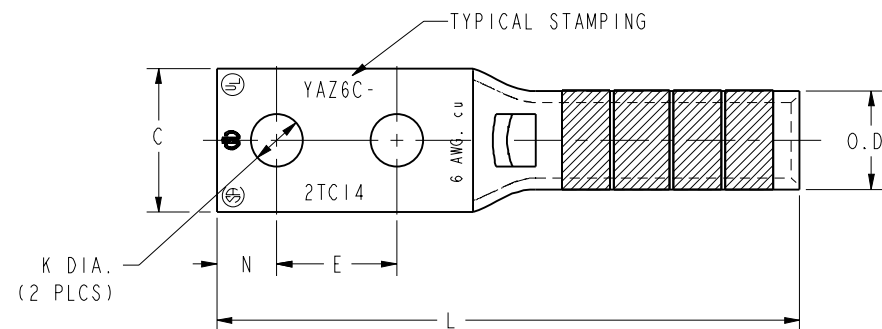
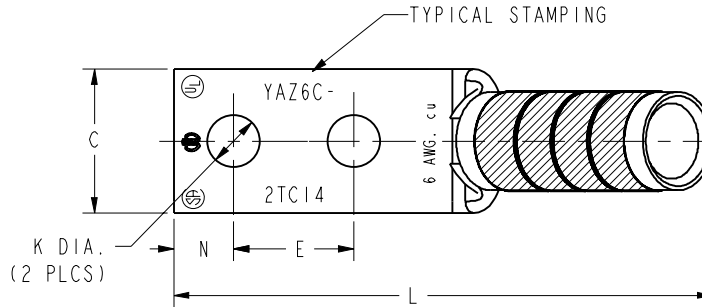
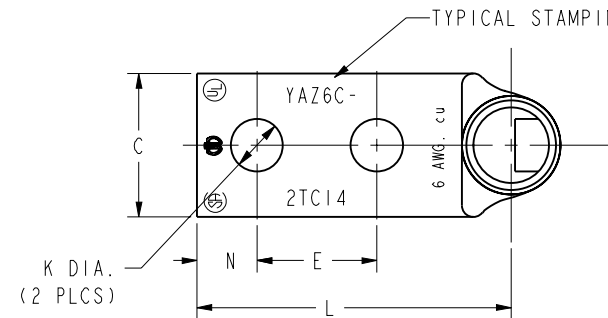
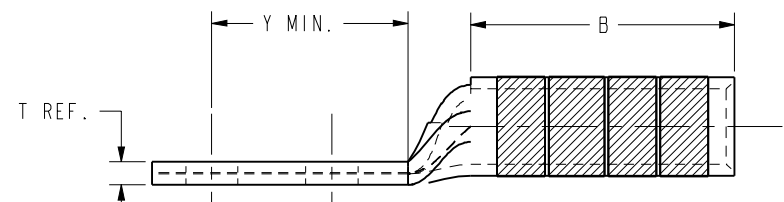
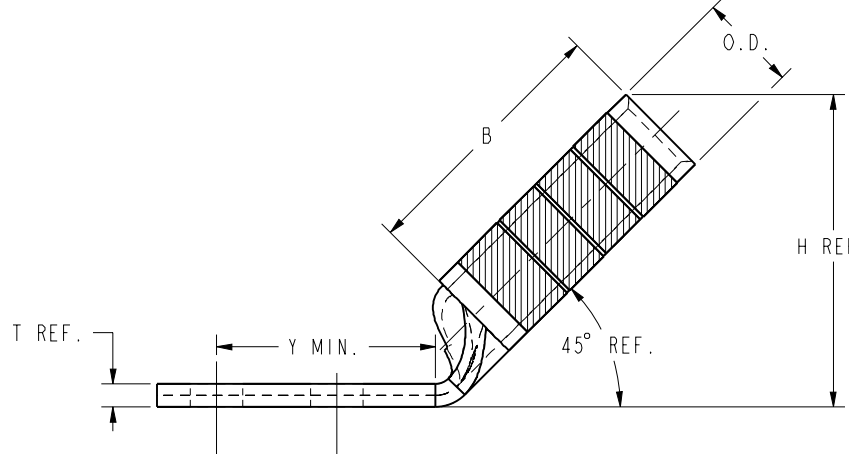
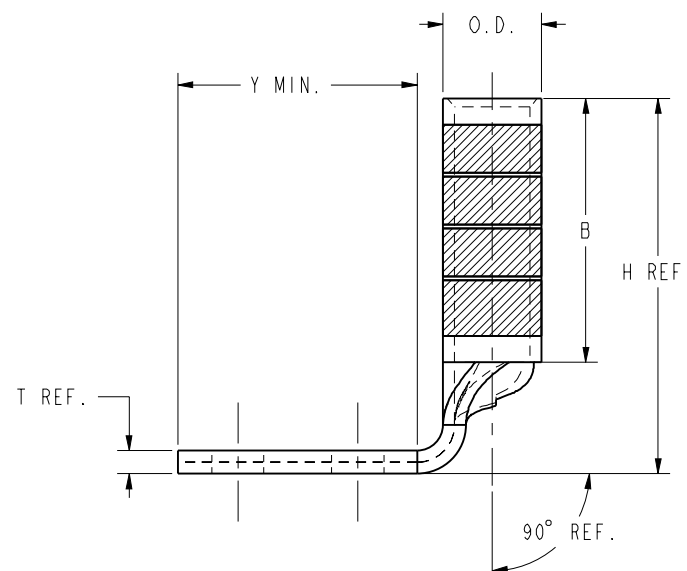


DRAWING NO. SE211915		7		6		5		4		3		2		1																		
												REV E	DATE 02/01/2016 09:30:00 AM	DESCRIPTION NOTE #10 UPDATED	ECO 41185	BY BSB	C'H'K. RG															
CATALOG NO.	CONDUCTOR		BOLT SIZE	FIG. NO.	DIMENSIONS									INSTALLATION TOOLING (# CRIMPS)																		
	CODE (AWG)	NAVY 			B ±.03	C +.04 -.02	E ±.02	H REF.	K DIA. ±.02	L ±.06	N ±.04	O.D. ±.01	T REF.	Y MIN.	DIE INDEX	COLOR CODE	MECHANICAL RATCHET			HYDRAULIC			DIELESS (# CRIMPS)	WIRE STRIP LENGTH								
																	MD7-34R MD6	OUR840	Y1MRTG Y122CMR	Y34A 	Y750 Y35, Y39	Y46 			Y45 							
D YAZ6C2TC14	#6 STR #6 SOL	30	1/4 [M6]	1	1.12 [28]	.45 [11]	.63 [16]	----	.27 [7]	2.65 [67]	.31 [8]	.29 [7]	.08 [2]	.96 [24]	7 OR 374	BLUE	W5CVT W5CRT (2)	W5CVT W5CRT (2)	BLUE (2)	A5CR (2)	U5CRT U8CABT (2)	U5CRT U8CABT (2)	U5CRT U8CABT (2)	MECHANICAL: MY29-11 (1) HYDRAULIC: Y644 (1)  PAT644 (1) Y81KFT (1) PAT81KFT (1)	1-3/16							
YAZ6C2TC1445				2			1.19 [30]																									
YAZ6C2TC1490 				3			1.50 [38]																									
YAZ6C2TC10				1			----																									
YAZ6C2TC1045	#6 STR #6 SOL	30	#10 [M5]	2	1.12 [28]	.42 [11]	.63 [16]	1.19 [30]	.21 [5]	2.33 [59]	.25 [6]	.09 [2]	.90 [23]	7 OR 374	BLUE	W5CVT W5CRT (2)	W5CVT W5CRT (2)	BLUE (2)	A5CR (2)	U5CRT U8CABT (2)	U5CRT U8CABT (2)	U5CRT U8CABT (2)			1-3/16							
YAZ6C2TC1090 				3																			1.50 [38]									
YAZ6C2TC10E2				1																			----									
YAZ6C2TC10E245	#6 STR #6 SOL	30	#10 [M5]	2	1.12 [28]	.42 [11]	.75 [19]	1.19 [30]	.21 [5]	2.48 [63]	.25 [6]	.09 [2]	1.03 [26]	7 OR 374	BLUE	W5CVT W5CRT (2)	W5CVT W5CRT (2)	BLUE (2)	A5CR (2)	U5CRT U8CABT (2)	U5CRT U8CABT (2)	U5CRT U8CABT (2)			1-3/16							
YAZ6C2TC10E290 				3																			1.52 [39]									
C   																																
B   																																
A NOTES: 1. MATERIAL: COPPER TUBING. 2. FINISH: TIN PLATED 3  CATALOG # PT6515 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y45 SERIES TOOLS. 4  CATALOG # PUADP-1 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y46 SERIES TOOLS. 5  NAVY CABLE SIZE MAY BE OMITTED ON SOME SIZES BECAUSE OF SPACE LIMITATIONS. 6  PERMANENT DIE IN TOOLING. 7. DIMENSIONS, METRIC WIRE, & METRIC BOLT SIZES IN BRACKETS [] ARE IN MILLIMETERS. DIMENSIONS ARE ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY. 8  FOR USE BY CUSTOMERS THAT HAVE THIS HYPRESS™ NO NEW Y34A HYPRESS™ ARE BEING PROCESSED. 9  DO NOT USE PAT644 OR Y644 TOOLING WITH 6 AWG SOL. 10  THESE CATALOG NUMBERS CANNOT BE INSTALLED WITH Y45 TOOLING.																																
TO ORDER BURNDY® PRODUCTS CALL UNITED STATES 1-800-346-4175 (LONDONDERRY, NH) CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES) FOR PRODUCT INFO: http://www.burndy.com												HYLUG™ ITEM NO: N/A CAT. NO: YAZ6C-2TC- (SEE TABLE) DRAWN BY: D. BOISVERT 11/11/98 CHECKER: K. HENRY 12/03/98 DSN APPVL: B. MACDONALD 12/02/98 MFG APPVL: N/A QA APPVL: S. GARY 11/30/98 MKT APPVL: B. HARDGROVE 11/25/98 PROD FAM: -- PROJECT #: -- DOCUMENT TYPE: Sales REL LEVEL: Released															SCALE: 4:1 DRAWING NO REV		SIZE D SE211915 SHEET 5 OF 36		E	
8		7		6		5		4		3		2		1																		