
Wire Basket Tray System


Under Floor Round Cross-Wire Basket Tray





- T-weld construction prevents snags
- 5mm round wire on smaller sizes
- 100% recycled steel


- Use factory support hardware or fabricate supports on the job site
- 2" x 4" mesh opening

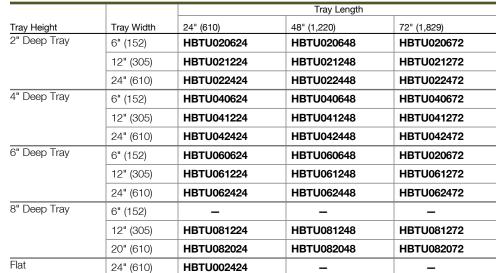

Note: Tray UL Classified as equipment ground conductor.



.1969" Dia. "Round" Wire Design



HBTU002424

Splice Hardware

Splice nardware				
Description	Finish	Catalog Number		
Kit, Pedestal (2) HBTUPC and (1) Cross bar	Pre-Galvanized	НВТИРК		
C-Bracket 6" Tier 12" Tier	Pre-Galvanized Pre-Galvanized	HBTUCB6 HBTUCB12		
U-Clamp, Pedestal (1) Clamp	Pre-Galvanized	HBTUPC		
Tray Grounding Fasteners Washer supports HBTWS and ½" - 20 self threading screws; 50 per box. Required when installing under floor wire basket tray.	Zinc Plated	HBTUGS		
Intersection Supports For use with HBTUSUPP series support	Pre-Galvanized	HBTUFIT		
Vertical Up	Pre-Galvanized	нвтичи		

Note: See page 10 for L-brackets and C-brackets.
See page 14 for wire fill and maximum load chart.

Saw Horse Supports

<u> </u>	oo oappo		
Support Height	Support Width	Finish	Catalog Number
4" (102)	22" (559)	Pre-Galvanized	HBTUSUPP4
6" (152)	22" (559)	Pre-Galvanized	HBTUSUPP6
8" (203)	22" (559)	Pre-Galvanized	HBTUSUPP8
10" (254)	22" (559)	Pre-Galvanized	HBTUSUPP10
12" (305)	22" (559)	Pre-Galvanized	HBTUSUPP12
14" (356)	22" (559)	Pre-Galvanized	HBTUSUPP14
16" (406)	22" (559)	Pre-Galvanized	HBTUSUPP16
18" (457)	22" (559)	Pre-Galvanized	HBTUSUPP18
20" (508)	22" (559)	Pre-Galvanized	HBTUSUPP20
22" (559)	22" (559)	Pre-Galvanized	HBTUSUPP22
24" (610)	22" (559)	Pre-Galvanized	HBTUSUPP24
26" (660)	22" (559)	Pre-Galvanized	HBTUSUPP26
28" (711)	22" (559)	Pre-Galvanized	HBTUSUPP28
30" (762)	22" (559)	Pre-Galvanized	HBTUSUPP30

Dimensions in Inches (mm)