



Switches

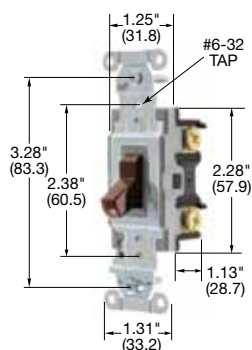

CSB120BRLV

Maintained Contact Toggle, Specification Grade, 5A, 24V DC


Description	Toggle Color	Single Pole	Double Pole	Three Way	Four Way
Nylon toggle, back and side wired.	Black	CSB120BKL V	—	CSB320BKL V	—
	Brown	CSB120BRL V	—	CSB320BRL V	—
	Gray	CSB120GYL V	—	CSB320GYL V	—
	Ivory	CSB120IL V	—	CSB320IL V	—
	Light Almond	CSB120LAL V	—	CSB320LAL V	—
	Red	CSB120RL V	—	CSB320RL V	—
	White	CSB120WHL V	—	CSB320WHL V	—



DS120WL

Maintained Contact Decorator, Specification Grade, 5A, 24V DC

Description	Toggle Color	Single Pole	Double Pole	Three Way	Four Way
Nylon decorator, back and side wired.	Black	DS120BKL V	—	DS320BKL V	—
	Brown	DS120L V	—	DS320L V	—
	Gray	DS120GYL V	—	DS320GYL V	—
	Ivory	DS120IL V	—	DS320IL V	—
	Light Almond	DS120LAL V	—	DS320LAL V	—
	Red	DS120RL V	—	DS320RL V	—
	White	DS120WL V	—	DS320WL V	—



HBL1557ILV

Momentary Contact, Specification Grade, Single Pole, Double Throw, Center OFF 5A, 24V DC

Description	Toggle Color	Single Pole	Double Pole	Three Way	Four Way
Nylon toggle, back and side wired.	Brown	HBL1557L V	—	—	—
	Gray	HBL1557GYL V	—	—	—
	Ivory	HBL1557IL V	—	—	—
	Red	HBL1557RL V	—	—	—
	White	HBL1557WL V	—	—	—

Note: See page D-13 for pre-wired/leaded devices.
See page D-15 for accessories and page D-16 for wallplates.
See page D-22 for technical information.

Dimensions in Inches (mm)

HP Conversion Chart

	120V	208V	240V	277V AC
15A	.5HP	1.5HP	2HP	2HP
20A	1HP	2HP	2HP	2HP