


M12773 1

15AMP DEVICE

20AMP DEVICE

20AMP HOSPITAL GRADE
15AMP NOT SHOWN

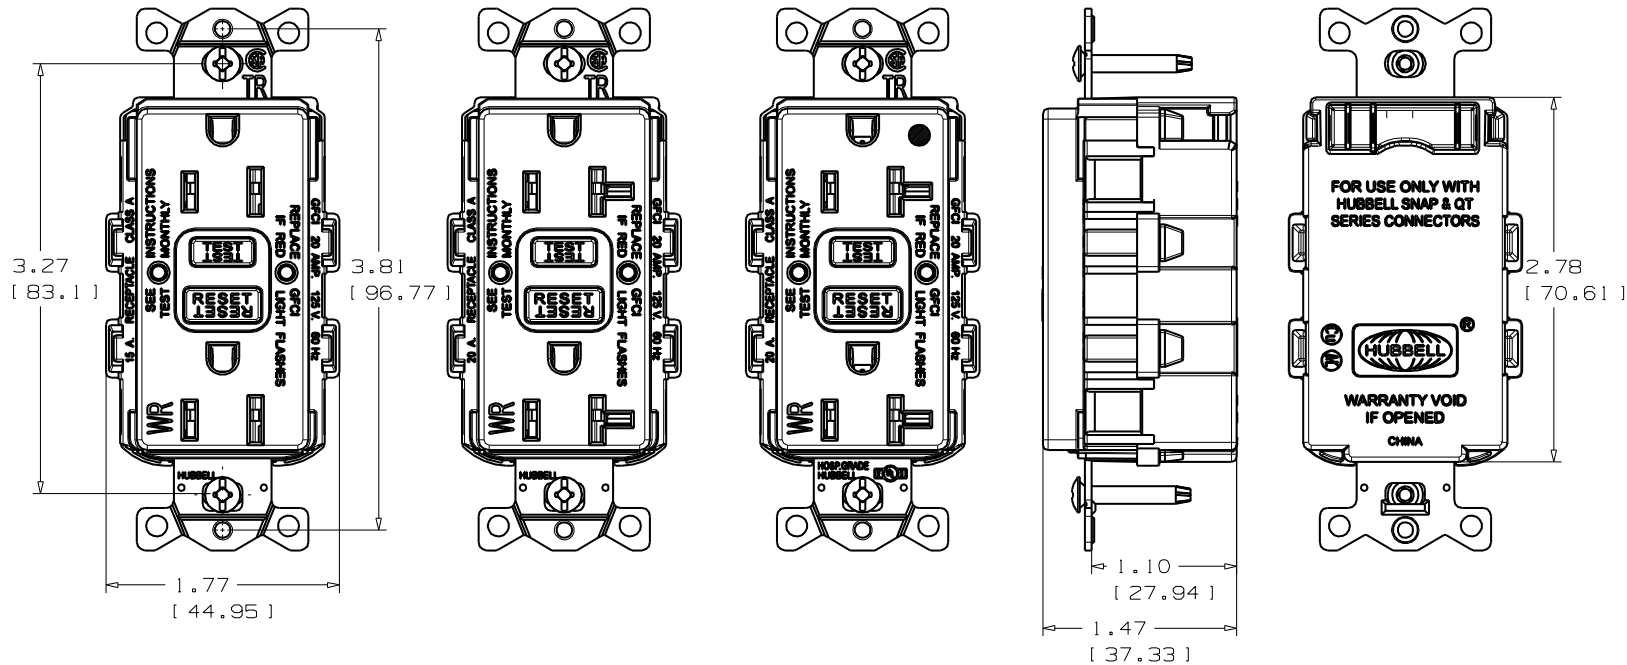

SNAPConnect TRWR GFCI								
BROWN	IVORY	WHITE	GRAY	BLACK	RED	ALMOND	LT ALMOND	RATING
GFTWRST15SNAP	GFTWRST15SNAP I	GFTWRST15SNAPW	GFTWRST15SNAPGY	GFTWRST15SNAPBK	GFTWRST15SNAPR	GFTWRST15SNAPAL	GFTWRST15SNAPLA	15A, 125V
GFTWRST20SNAP	GFTWRST20SNAP I	GFTWRST20SNAPW	GFTWRST20SNAPGY	GFTWRST20SNAPBK	GFTWRST20SNAPR	GFTWRST20SNAPAL	GFTWRST20SNAPLA	20A, 125V
SNAPConnect HOSPITAL GRADE TRWR GFCI								
GFTWRST82SNAP	GFTWRST82SNAP I	GFTWRST82SNAPW	GFTWRST82SNAPGY	GFTWRST82SNAPBK	GFTWRST82SNAPR	GFTWRST82SNAPAL	GFTWRST82SNAPLA	15A, 125V
GFTWRST83SNAP	GFTWRST83SNAP I	GFTWRST83SNAPW	GFTWRST83SNAPGY	GFTWRST83SNAPBK	GFTWRST83SNAPR	GFTWRST83SNAPAL	GFTWRST83SNAPLA	20A, 125V

- NOTES:
- DIMENSIONS IN INCHES [MM].
 - MEETS UL943 CLASS A GFCI'S AND UL498 FOR RECEPTACLES.
 - TERMINAL ACCOMADATIONS #14-10 AWG, STRANDED OR SOLID COPPER CONDUCTORS ONLY.

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
FACE	ZYTEL	
BRIDGE	STEEL	GALVANIZED
BRIDGE-HOSPITAL GRADE ONLY	BRASS	
CONTACTS	BRASS	
CONTACTS	BRASS	SILVER PLATED
CLAMP PLATES	BRASS	
BASE	ZYTEL	
MOUNTING SCREWS	SS	
BINDING SCREWS	STEEL	
SHUTTER MECHANISM	DELFIN	

REPAIRABLE ☐ NON-REPAIRABLE ☒

1	INITIAL RELEASE PER DCN20694 AH 03/10/2015	KP	3/10/15	B
SYM	REVISIONS	APP	DATE	
THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE				
TITLE CUST DWG SNAPConnect GFR TWR 15 / 20 AMP				
TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT		
FRACTIONS	± 1/64	DR. BY	A.H	APP. BY
DECIMALS	± .005	TR. BY		SCALE 1:1
ANGLES	± 2°	CHK'D BY	KP	DATE 11/21/14

M-12773

1