


ACCESSORY DOWNRODS

3/4" diameter; approximately 1" outside diameter.

	CEILING HT. DOWNROD L.	9'-10'	10'-11'	11'-12'	12'-14'	13'-15'	14'-16'	15'-17'
		12"	18"	24"	36"	48"	60"	72"
● Brushed Nickel		P2603-09	P2604-09	P2605-09	P2606-09	P2607-09	P2608-09	P2609-09
● Polished Chrome		P2603-15	P2604-15	P2605-15	P2606-15	P2607-15	P2608-15	P2609-15
● Antique Bronze		P2603-20	P2604-20	P2605-20	P2606-20	P2607-20	P2608-20	P2609-20
● Satin White		P2603-28	P2604-28	P2605-28	P2606-28	P2607-28	-	-
● White		P2603-30	P2604-30	P2605-30	P2606-30	P2607-30	P2608-30	P2609-30
● Black		P2603-31	P2604-31	P2605-31	P2606-31	P2607-31	-	-
● Forged Bronze		P2603-77	P2604-77	P2605-77	P2606-77	P2607-77	P2608-77	P2609-77
● Forged Black		P2603-80	P2604-80	P2605-80	P2606-80	P2607-80	P2608-80	P2609-80
● Antique Nickel		P2603-81	P2604-81	P2605-81	P2606-81	P2607-81	P2608-81	P2609-81
● Galvanized		P2603-141	P2604-141	P2605-141	P2606-141	P2607-141	-	-
● Graphite		P2603-143	P2604-143	P2605-143	P2606-143	P2607-143	P2608-143	P2609-143

DOWNROD SELECTION GUIDE

Allow at least 7 feet (84 in.) from the floor to the bottom of the fan, with 8 or 9 feet being the ideal above-floor placement.

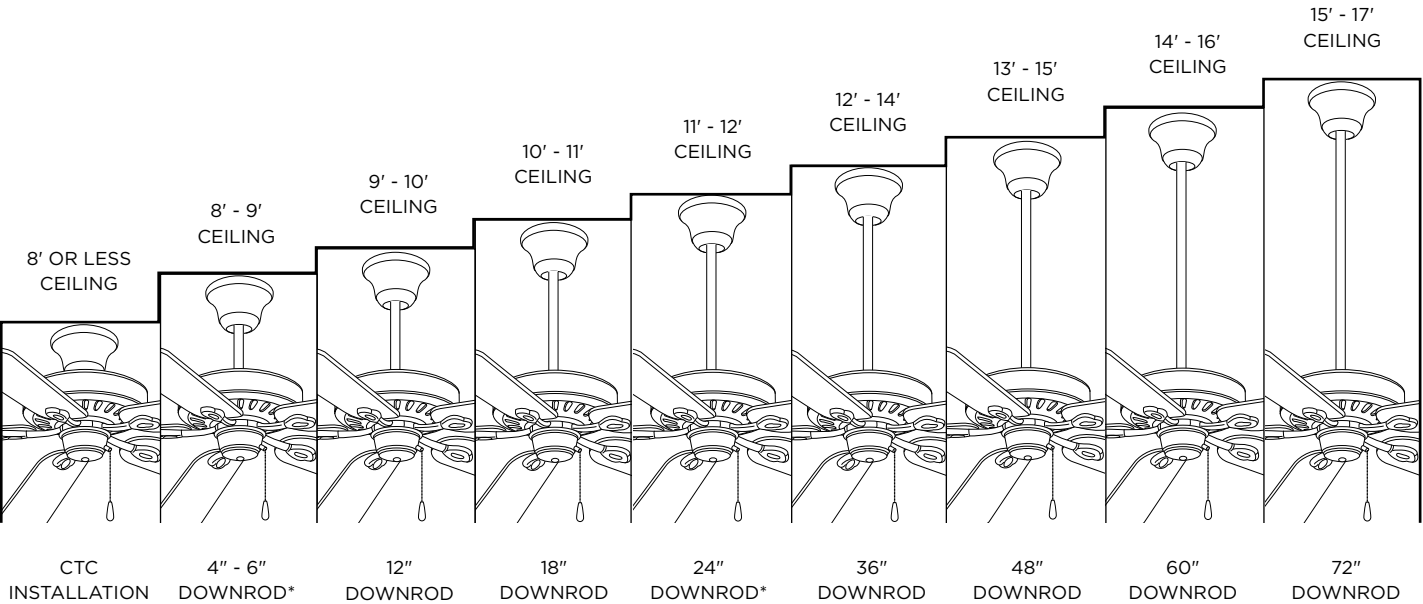

* Average length downrod, included with each fan.