


MINI-FLUSH MOUNT

The LED flush mount series uses an intuitive snap-in system that makes flush mount installation easier than ever. Simply install adapter onto junction box, then snap into place using the flush mount clip.

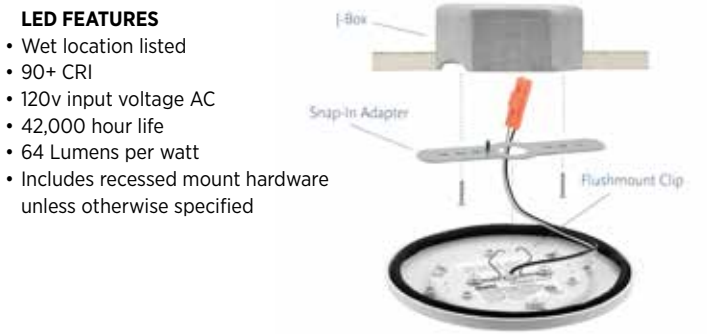

- LED FEATURES**
- Wet location listed
 - 90+ CRI
 - 120v input voltage AC
 - 42,000 hour life
 - 64 Lumens per watt
 - Includes recessed mount hardware unless otherwise specified

7-1/4" ROUND TRIAC DIMMING

Flicker free dimming down to 10% with many Triac or forward phase dimmers. Flicker rate less than 30%.

P8022-20-30K Antique Bronze
P8022-28-30K White
P8022-31-30K Black
P8022-82-30K Metallic Gray
7-1/4" dia., 1-1/4" ht.
One 17w LED module included.
1050 lumens, 63 lumens per watt.



P8022-20-30K



P8022-28-30K



P8022-31-30K



P8022-82-30K



P8222-28-30K

P8222-28-30K White
Does not include recessed mount hardware.
7-1/4" dia., 1-1/4" ht.
One 17w LED module included.
1050 lumens, 63 lumens per watt.



7-1/4" ROUND ELV DIMMING

Flicker free dimming down to 10% with many ELV dimmers.

P8022-20/30K9-AC1-L10 Antique Bronze
P8022-28/30K9-AC1-L10 White
P8022-31/30K9-AC1-L10 Black
P8022-82/30K9-AC1-L10 Metallic Gray
7-1/4" dia., 1-1/4" ht.
One 17w LED module included.
1050 lumens, 63 lumens per watt.



P8022-20/30K9-AC1-L10



P8022-28/30K9-AC1-L10



P8022-31/30K9-AC1-L10



P8022-82/30K9-AC1-L10



P8222-28/30K9-AC1-L10

P8222-28/30K9-AC1-L10 White
Does not include recessed mount hardware.
7-1/4" dia., 1-1/4" ht.
One 17w LED module included.
1050 lumens, 63 lumens per watt.



7-1/4" SQUARE ELV DIMMING

Flicker free dimming down to 10% with many ELV dimmers.

P8027-2030K9-AC1-L10 Antique Bronze
P8027-2830K9-AC1-L10 White
P8027-3130K9-AC1-L10 Black
P8027-8230K9-AC1-L10 Metallic Gray
7-1/4" sq., 1-1/4" ht.
One 17w LED module included.
1050 lumens, 63 lumens per watt.



P8027-2030K9-AC1-L10



P8027-2830K9-AC1-L10



P8027-3130K9-AC1-L10



P8027-8230K9-AC1-L10

5-1/2" ROUND TRIAC DIMMING

Flicker free dimming with Triac or forward phase dimmers. Flicker rate less than 30%.

P8240-20-30K Antique Bronze
P8240-28-30K White
P8240-31-30K Black
P8240-82-30K Metallic Gray
5-1/2" dia., 1-1/8" ht.
One 10.5w LED module included.
660 lumens, 62 lumens per watt.



P8240-20-30K



P8240-28-30K



P8240-31-30K



P8240-82-30K

5-1/2" ROUND ELV DIMMING

Flicker free dimming with many ELV dimmers.

P8240-20/30K9-AC1-L06 Antique Bronze
P8240-28/30K9-AC1-L06 White
P8240-31/30K9-AC1-L06 Black
P8240-82/30K9-AC1-L06 Metallic Gray
5-1/2" dia., 1-1/8" ht.
One 12w LED module included.
623 lumens, 51 lumens per watt.



P8240-20/30K9-AC1-L06



P8240-28/30K9-AC1-L06



P8240-31/30K9-AC1-L06



P8240-82/30K9-AC1-L06

5-1/4" SQUARE TRIAC DIMMING

Flicker free dimming down to 10% with many Triac or forward phase dimmers. Flicker rate less than 30%.

P8241-20-30K Antique Bronze
P8241-28-30K White
P8241-31-30K Black
P8241-82-30K Metallic Gray
5-1/4" sq., 1-1/8" ht.
One 10.5w LED module included.
645 lumens, 61 lumens per watt.



P8241-20-30K



P8241-28-30K



P8241-31-30K



P8241-82-30K

5-1/2" SQUARE ELV DIMMING

Flicker free dimming down to 10% with many ELV dimmers.

P8241-20/30K9-AC1-L06 Antique Bronze
P8241-28/30K9-AC1-L06 White
P8241-31/30K9-AC1-L06 Black
P8241-82/30K9-AC1-L06 Metallic Gray
5-1/4" sq., 1-1/8" ht.
One 10.5w LED module included.
680 lumens, 64 lumens per watt.



P8241-20/30K9-AC1-L06



P8241-28/30K9-AC1-L06



P8241-31/30K9-AC1-L06



P8241-82/30K9-AC1-L06


LED SLIM-LINE SURFACE MOUNT

Flush mount that can mount into a minimum 2" box. See progresslighting.com for compatible J boxes.

LED SLIM-LINE SURFACE MOUNT
P8107-2030K Antique Bronze
P8107-2830K White
P8107-3130K Black
P8107-8230K Metallic Gray
5-1/2" dia., 2-3/4" ht.
One 12w LED module included.
630 lumens, 52.5 lumens per watt.



P8107-2830K



Bracket for P8107-2830K9 shown mounted into JBox. JBox not included.